


GPS

Jupiter JN3 GPS modules Embedded

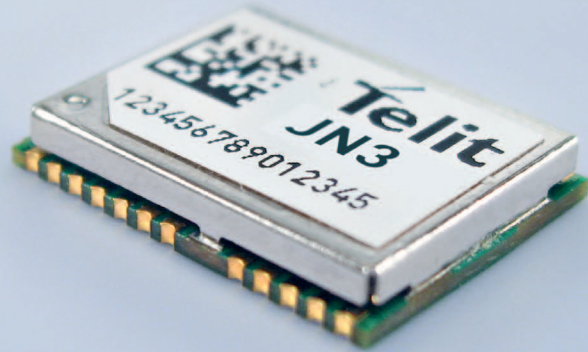

-  Ultra Compact
-  LCC Package
-  High Sensitivity
- NMEA** NMEA 0183
-  < 2.5m Position Accuracy
-  Low Power Consumption
-  WAAS, EGNOS, MSAS and GAGAN capable
-  48 Channel GPS Receiver
-  A-GPS
-  Ephemeris File Injection
-  RoHS Compliant
-  Extended Temperature Range

The new Telit Jupiter JN3 is a state-of-the-art 48-channel GPS module with high sensitivity, extremely low power consumption and extended ephemeris injection for fastest TTFF.

Telit Jupiter JN3 coupled with a Telit GSM/GPRS module represents the ideal Wireless+GPS solution in terms of total cost effectiveness and time-to-market readiness.

The extreme low profile and small size of the LCC package enables the design of ultra-compact applications. The solution cost and required space is significantly reduced.

With its ultra-compact design and extended temperature range, the Telit Jupiter JN3 is the perfect module for low, medium and high-volume m2m combined applications and mobile/tracking data devices.

Telit Jupiter JN3 is equipped with integrated LNA as well as a wide set of interfaces like UART and I2C (only for MEMS). It supports assisted ephemeris file injection as well as Satellite Based Augmentation System (SBAS) like WAAS, EGNOS, MSAS and GAGAN. Moreover, Telit Jupiter JN3 is able to track and remove in-band Jammers.

Jupiter JN3 is provided with an internal SW engine able to locally predict the ephemeris for three days in advance starting from ephemeris data collected by satellites.

Jupiter JN3 is provided with internal Flash memory to store operative SW, SW updates and Extended Ephemeris files (locally and server generated).

Equipped with a powerful yet power saving baseband processor, Telit Jupiter JN3 provides all the GPS information via NMEA standard protocol on serial interface.


Applications requiring an extremely quick FIX can efficiently retrieve the correct position within two seconds, by means of assisted GPS and real-time ephemeris file injection.

As a part of Telit's corporate policy of environmental protection, all Telit products comply the RoHS (Restriction of Hazardous Substances) directive of the European Union (EU Directive 2002/95/EG).



Jupiter JN 3

GPS modules
Embedded



actual size



Telit Communications S.p.A.
Via Stazione di Prosecco, 5/B
I-34010 Sgonico (Trieste), Italy
Tel +39 040 4192 200
Fax +39 040 4192 289
E-Mail: EMEA@telit.com

Telit Wireless Solutions Inc.
3131 RDU Center Drive, Suite 135
Morrisville, NC 27560, USA
Tel +1 888 846 9773 or +1 919 439 7977
Fax +1 888 846 9774 or +1 919 840 0337
E-Mail: NORTHAMERICA@telit.com

Telit Wireless Solutions Inc.
Rua Cunha Gago, 700 - cj 81, Pinheiros
São Paulo - SP, 05421001, Brazil
Tel +55 11 2679 4654
Fax +55 11 3031 5051
E-Mail: LATINAMERICA@telit.com

Telit Wireless Solutions Co., Ltd.
12th Fl., Shinyoung Securities Bld.
34-12, Yeouido-dong, Yeongdeungpo-gu
Seoul, 150-884, Korea
Tel. +82 2 368 4600
Fax +82 2 368 4606
E-Mail: APAC@telit.com

www.telit.com

www.telit.com/ebook



www.telit.com/techforum



www.telit.com/facebook



www.telit.com/twitter

Distributed by:

Product features

- Dimensions: 16 x 12.2 x 2.4 mm
- Weight: 1.8g
- 24-pad LCC package, requiring only 2 Layer PCB
- Frequency Band: GPS L1 Band, C/A Code
- Standards: NMEA
- 48 Channel GPS architecture
- Sensitivity
 - Acquisition: -147 dBm
 - Navigation: -160 dBm
 - Tracking: -163 dBm
- Flexible power supply
 - Range from 2.85 up to 3.6 V
- Positional Accuracy (CEP50):
Autonomous Positional Error < 2.5 m
- Accuracy
 - Speed: < 0.01 m/s
 - Heading: < 0.01 deg
- Time To First Fix (90% @ -130 dBm)
 - Hot Start: 1 s
 - Cold Start: <35 s
- Current consumption
 - Hibernate mode: 40 uA
 - Low power mode (Tracking 1Hz): 10 mA
 - Full power Tracking: 32 mA
- RoHS compliant
- Temperature Range
 - Operating temperature: -40 to +85°C
 - Storage temperature: -40 to +85°C

Interfaces

- UART, IIC interfaces
- PPS for precise timing
- EGNOS, WAAS, GAGAN and MSAS capability embedded with correction of positional errors due to ionospheric and orbital disturbances
- RTC for efficient power management

Additional features

- A-GPS: ephemeris file injection

Order No.

Please contact your Telit representative for order codes and all further information and additional details



Copyright © 2012, Telit - Subject to changes in technology, design and availability

* Copyright © 1991-1995 by Stichting Mathematisch Centrum, Amsterdam, The Netherlands; All Rights Reserved.
Copyright © 1995-2001 Corporation for National Research Initiatives; All Rights Reserved.
Copyright © 2001-2010 Python Software Foundation; All Rights Reserved.
All Rights Reserved are retained in Python.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331