

DETAILS


Product Number	C13012_FLARE-MAXI-D
Family	Flare
Type	Lens
Color	clear
Diameter	33,9 + 33,3 mm
Height	16,7 mm
Style	rectang
Optic Material	PMMA
Holder Material	
Fastening	pin, glue
Status	ready
ROHS Compliant	Yes
Date Updated	13/08/2014



OPTICAL PROPERTIES

LED	Viewing Angle	Light Beam	Efficiency	cd/lm	Connector
LUXEON H50-2	sim: 10+65	REC-class	sim: 92 %	sim: 3.300	-
Duris S10	92+20 deg	REC-class	93 %	1.600	-
LH351Z	98+13 deg	REC-class	94 %	2.200	-
Oslon Square EC	99+14 deg	REC-class	94 %	2.000	-
MK-R	100+23 deg	REC-class	92 %	1.200	-
XM-L2	101+17 deg	REC-class	94 %	1.900	-
LUXEON MZ	101+16 deg	REC-class	94 %	1.900	-
LUXEON T	102+13 deg	REC-class	92 %	1.800	-
LUXEON M	102+25 deg	REC-class	94 %	1.400	-
LUXEON TX	103+13 deg	REC-class	93 %	2.060	-
Z5M1/Z5M2	104 + 14 deg	REC-class	94 %	2.100	-
LUXEON A	104+12 deg	REC-class	94 %	2.100	-
Oslon Square PC	104+12 deg	REC-class	94 %	2.000	-
LUXEON Rebel ES	104+13 deg	REC-class	94 %	2.000	-
XHP50	104+19 deg	REC-class	92 %	1.300	-
XHP70	104+28 deg	REC-class	92 %	0.940	-
XP-G2	106+14 deg	REC-class	94 %	2.000	-
NCSxx19B	107+13 deg	REC-class	94 %	2.100	-
XM-L	110+15 deg	REC-class	94 %	1.700	-
NS9x383	110+16 deg	REC-class	93 %	1.500	-
XP-G	115+15 deg	REC-class	94 %	1.900	-
NVSxx19B/NVSxx19C	116+13 deg	REC-class	94 %	1.700	-
XT-E	117+14 deg	REC-class	94 %	1.900	-
XP-L	119+16 deg	REC-class	94 %	1.480	-
Oslon SSL 150	128+13 deg	REC-class	94 %	2.000	-

Relative intensity of C13012_FLARE-MAXI-D_(Duris_S10)

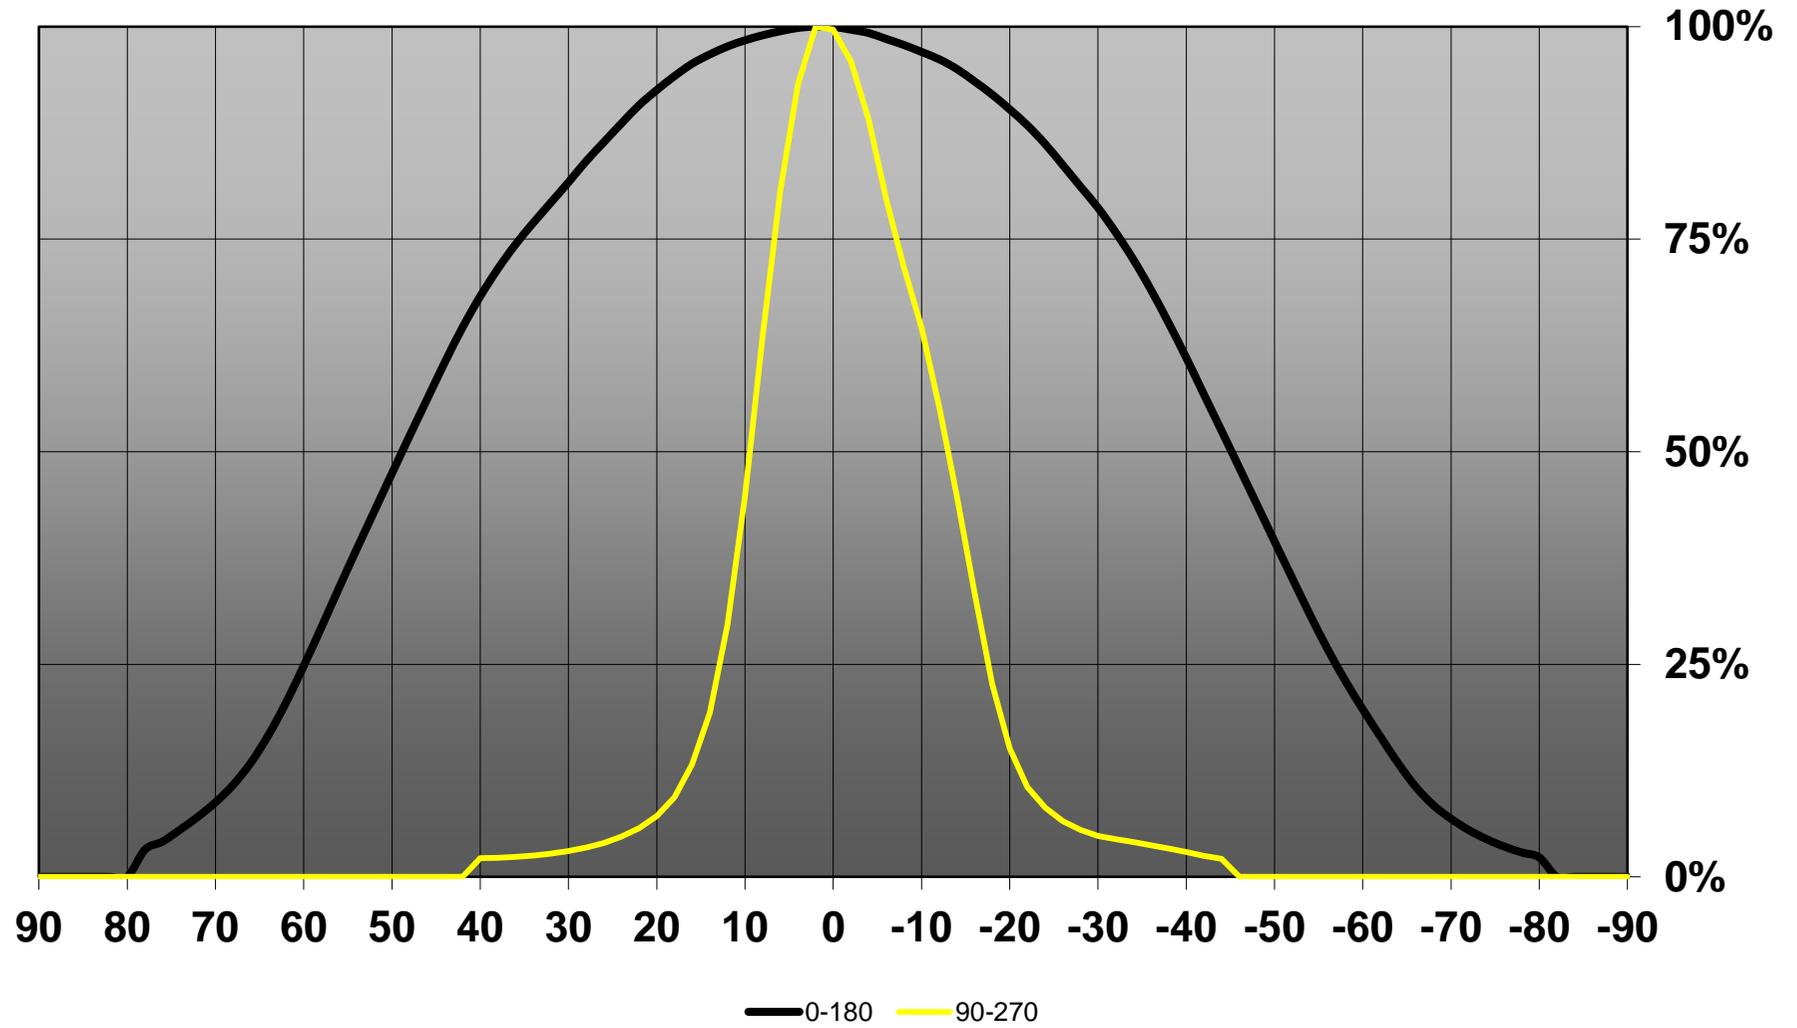

D


C

B




A

4

4


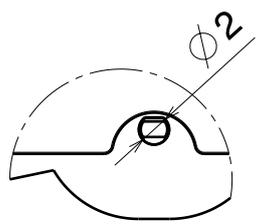


Detail A
Scale: 2:1

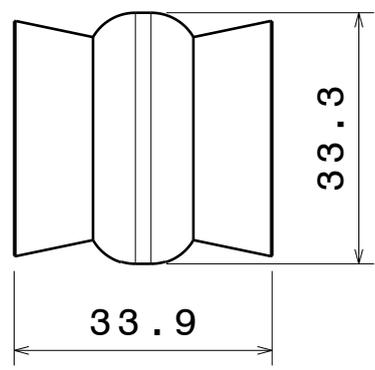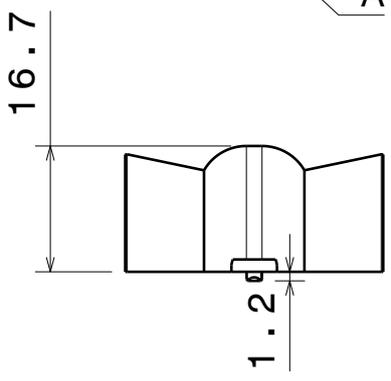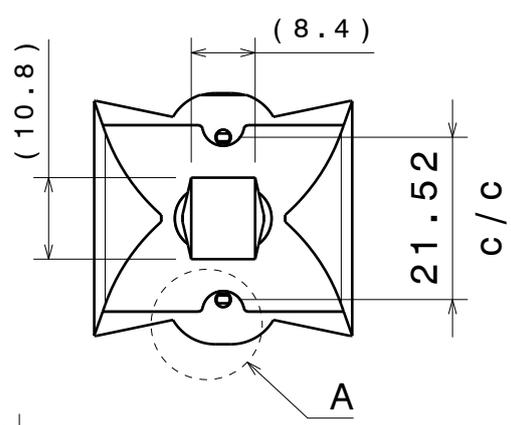

3

3

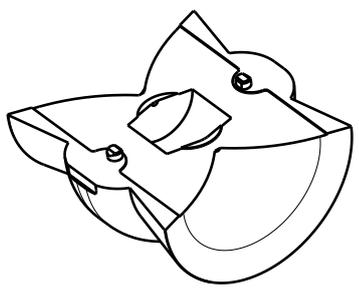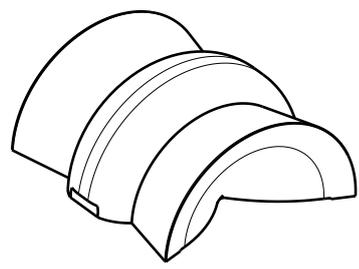

2

2

1

1

This drawing is our property.
It can't be reproduced
or communicated without
our written agreement.



Ledil Oy
Salorankatu 10
FIN 24240 SALO
Finland

DRAWING TITLE
Datasheet FLARE-MAXI-D Lens

DRAWN BY
ah

DATE
7.11.2013

CHECKED BY
pv

DATE
7.11.2013

SIZE
A4

DRAWING NUMBER
C13012

REV
1

DESIGNED BY
hh

DATE
6.4.2012

SCALE 1:1


WEIGHT (g)

SHEET 1/1


D

A

Luminaire: LEDiL Oy C13012_FLARE-MAXI-D_(LH351Z) Eff.94.1%
Lamps: 1 x SAMSUNG_LH351Z_90.8111lm@250mA_P=0.748076W_I=249.9mA

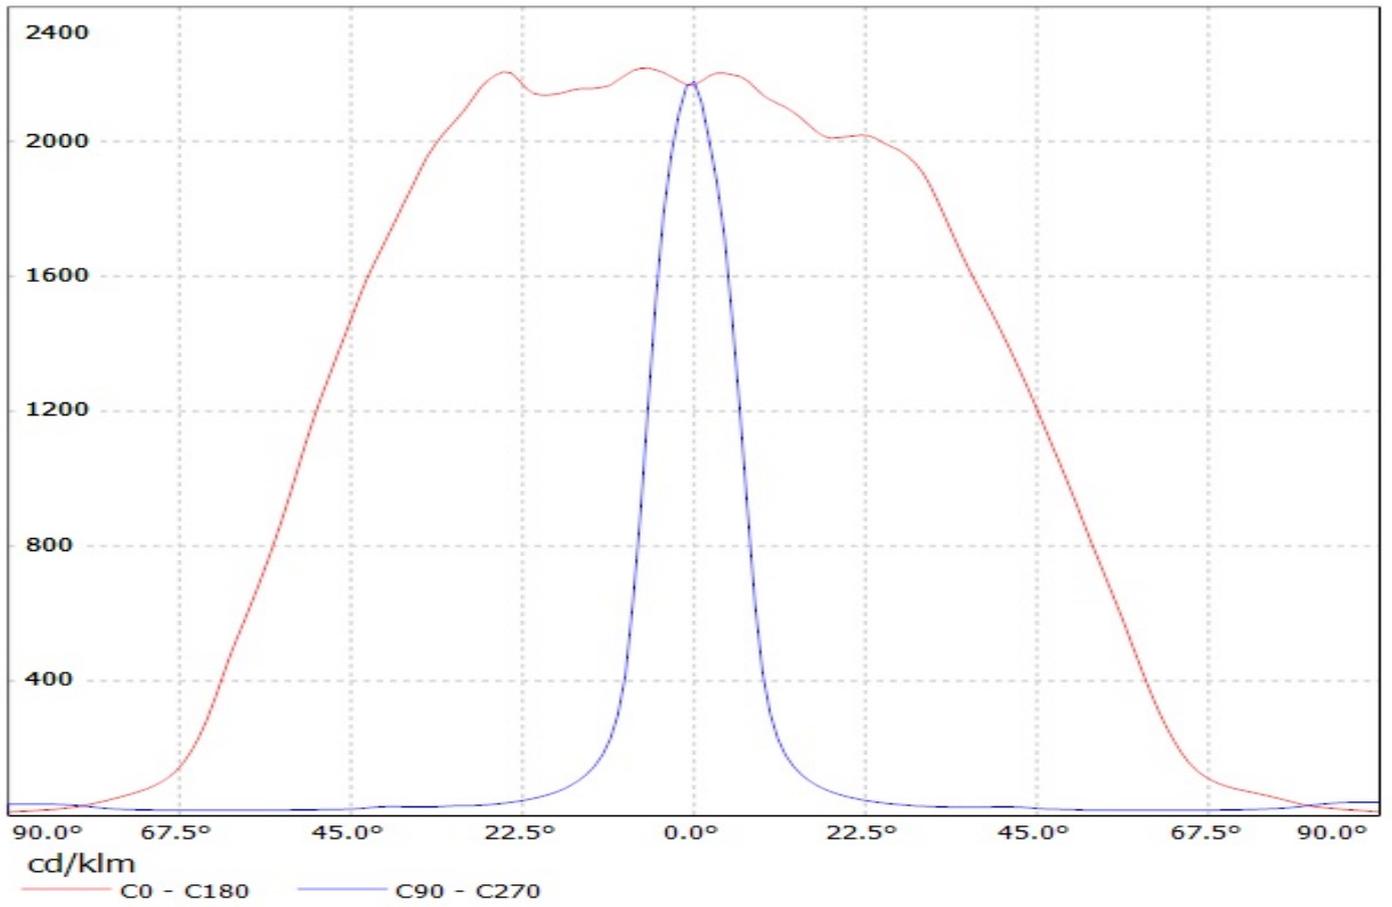


Luminaire: Ledil Oy C13012_FLARE-MAXI-D (Osam Square EC 66lm @250mA) Efficiency=94%
Lamps: 1 x Osam Square EC 66lm @250mA

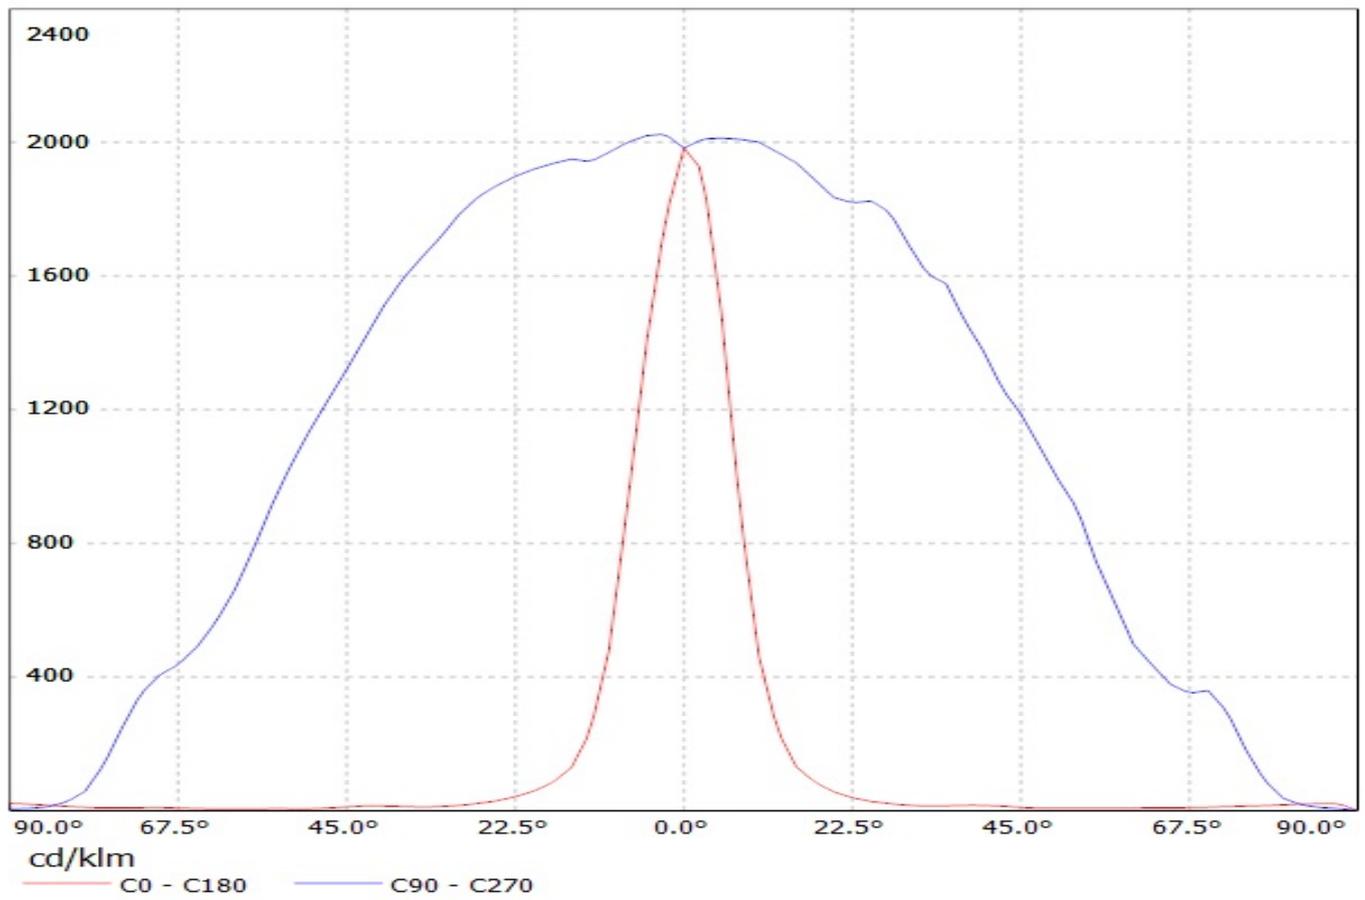


LEDiL Oy C13012_FLARE-MAXI-D_(MKR) Eff.92.2% / LDC (Linear)


Luminaire: LEDiL Oy C13012_FLARE-MAXI-D_(MKR) Eff.92.2%
Lamps: 1 x CREE_MKR (368.505lm@250mA)

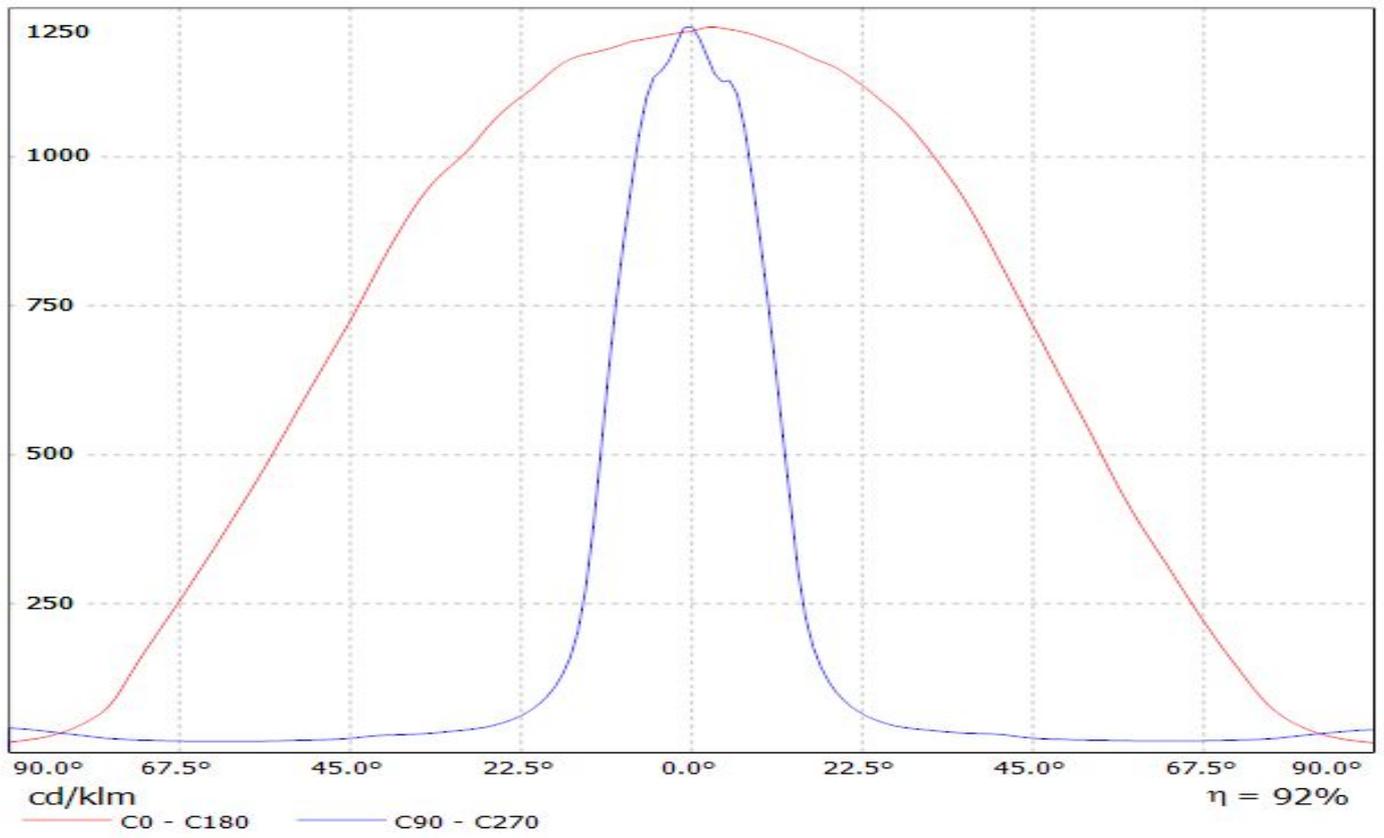


Luminaire: LEDil Oy C13012_FLARE-MAXI-D_(XM-L2) Efficiency=94%
Lamps: 1 x Cree XM-L2 (XMLBWT-0-7B4-T30-0L-0001) 91lm @ 250mA CCT=3200K P=0.7W I=250mA

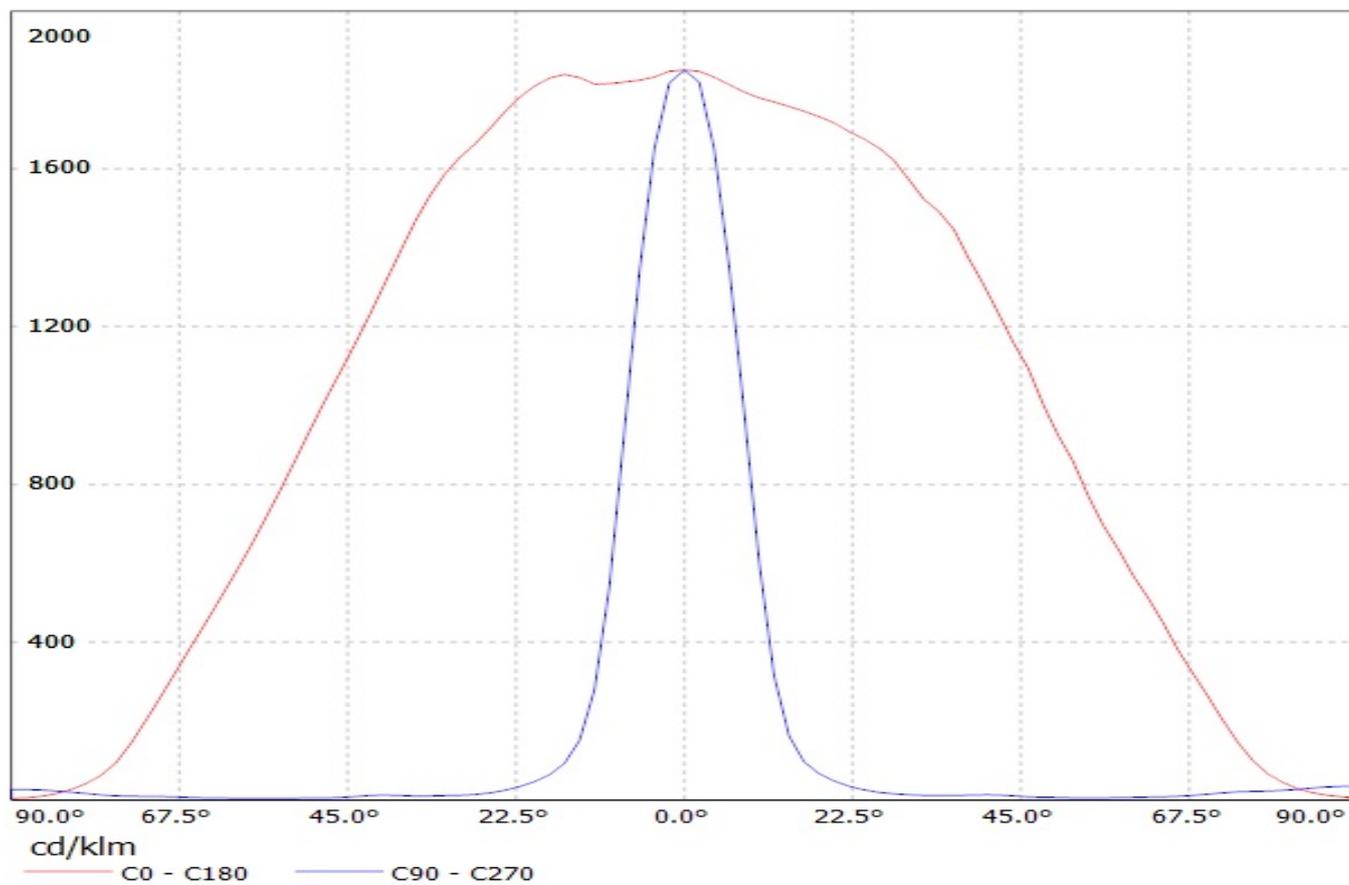


Luminaire: LEDil Oy C13012_FLARE-MAXI-D_(Luxeon_MZ) Efficiency=94%
Lamps: 1 x Philips Lumileds Luxeon MZ (389lm @ 250mA) CCT=3800K P=2.8W I=250mA

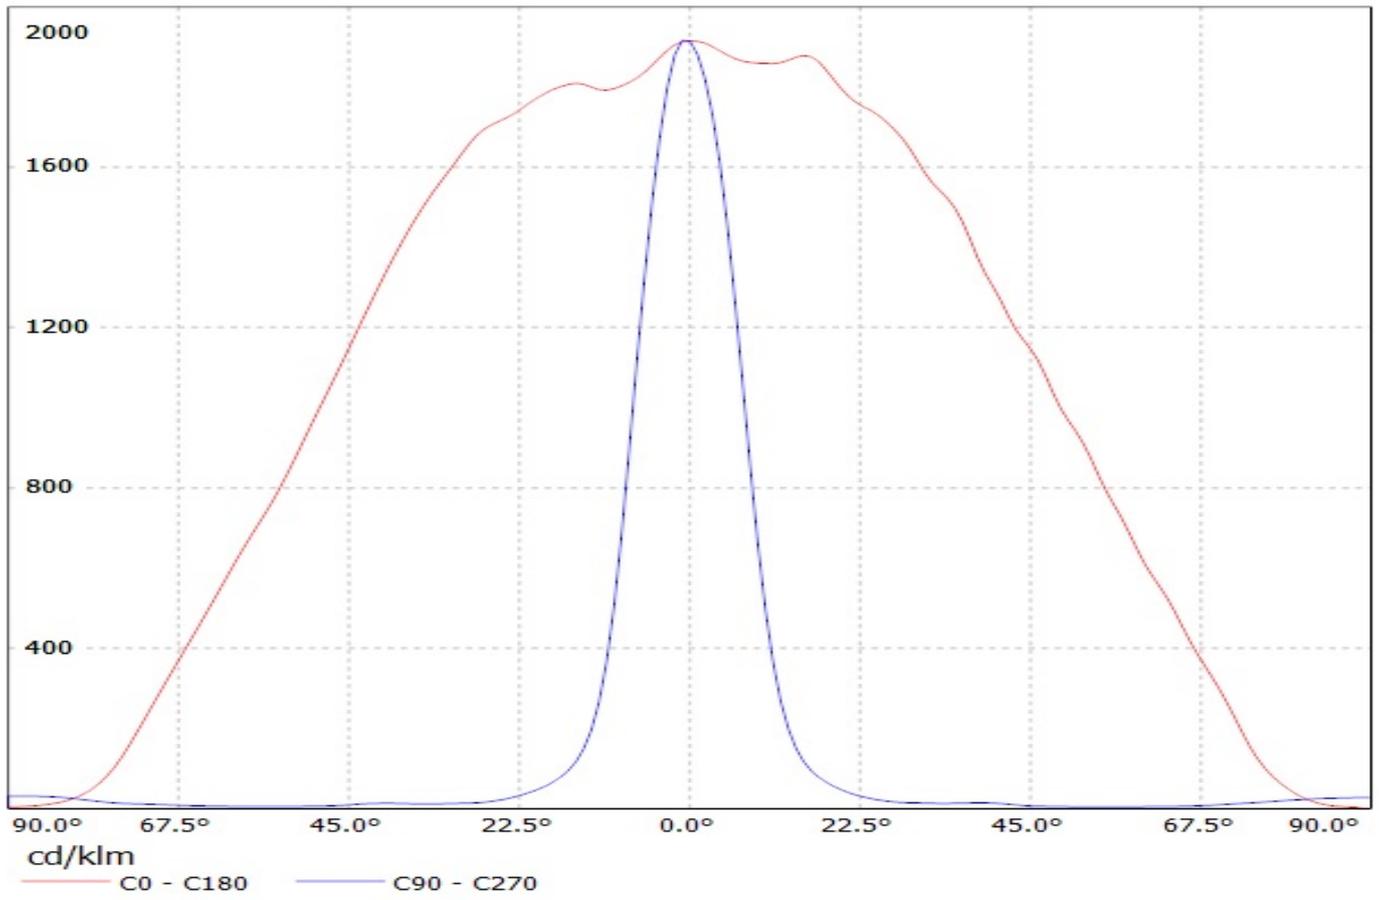

Luminaire: LEDiL Oy C13012_FLARE-MAXI-D_(LUXEON_T) Eff.92.0%
Lamps: 1 x LUXEON T (74lm@250mA)

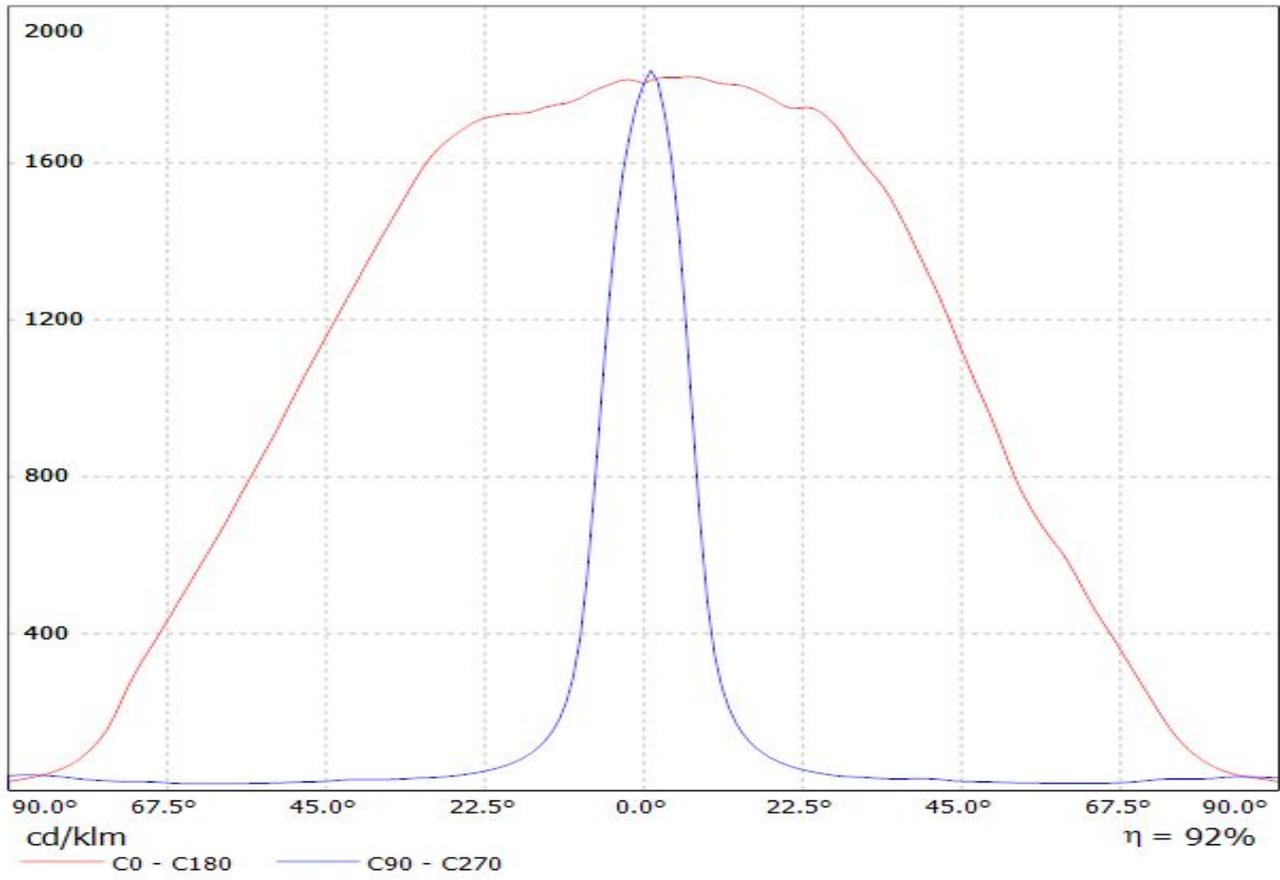


Luminaire: Ledil Oy C13012_FLARE-MAXI-D (Luxeon M 342lm @250mA) Efficiency=94%
Lamps: 1 x Luxeon M 342lm @250mA

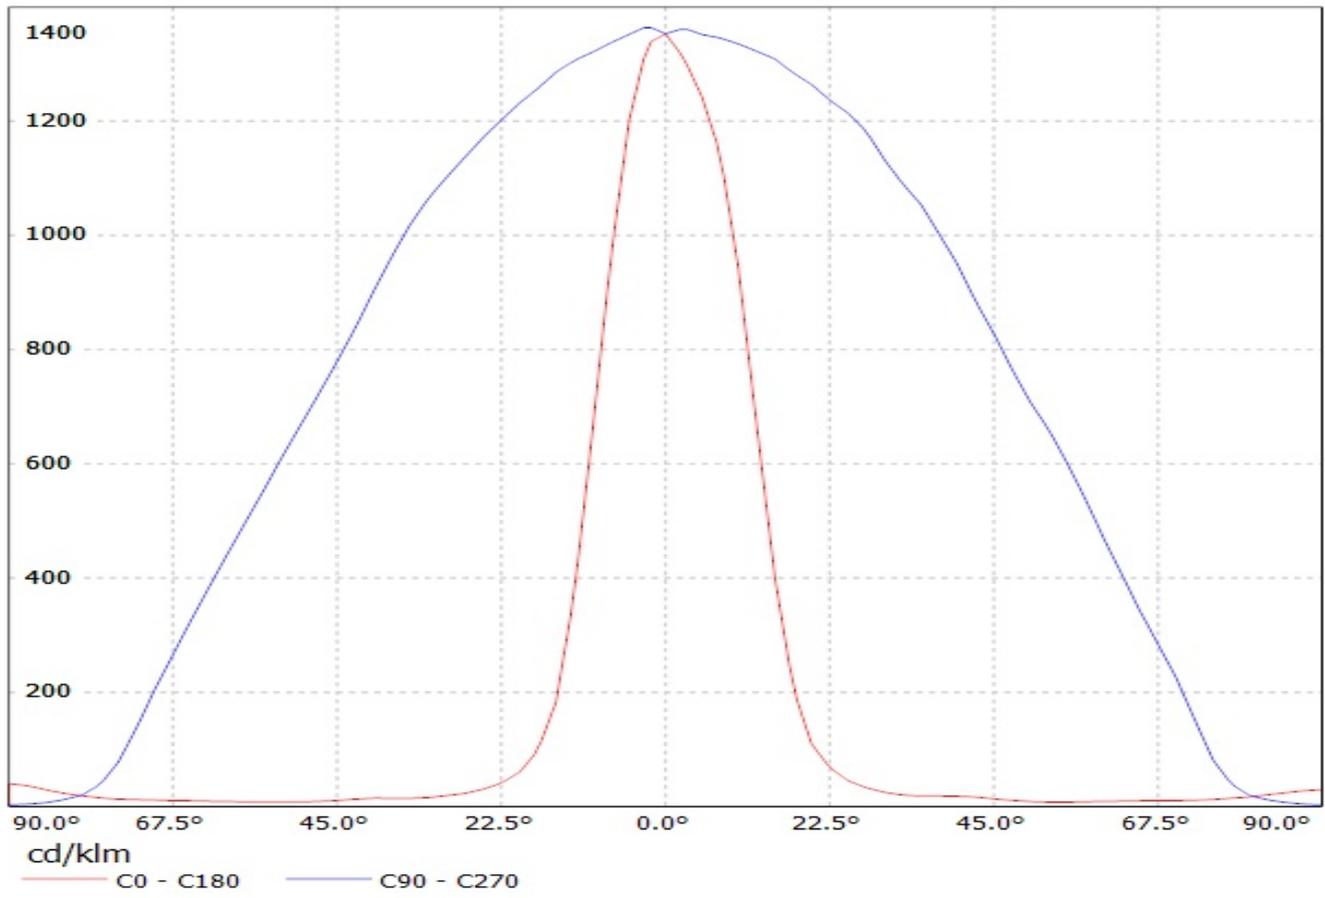


Luminaire: LEDiL Oy C13012_FLARE-MAXI-D (Luxeon_TX)


Lamps: 1 x Luxeon_TX_(L1T2-3585)_80.1801lm@250mA_CCT=3500K_P=0.731482W_I=249.9mA

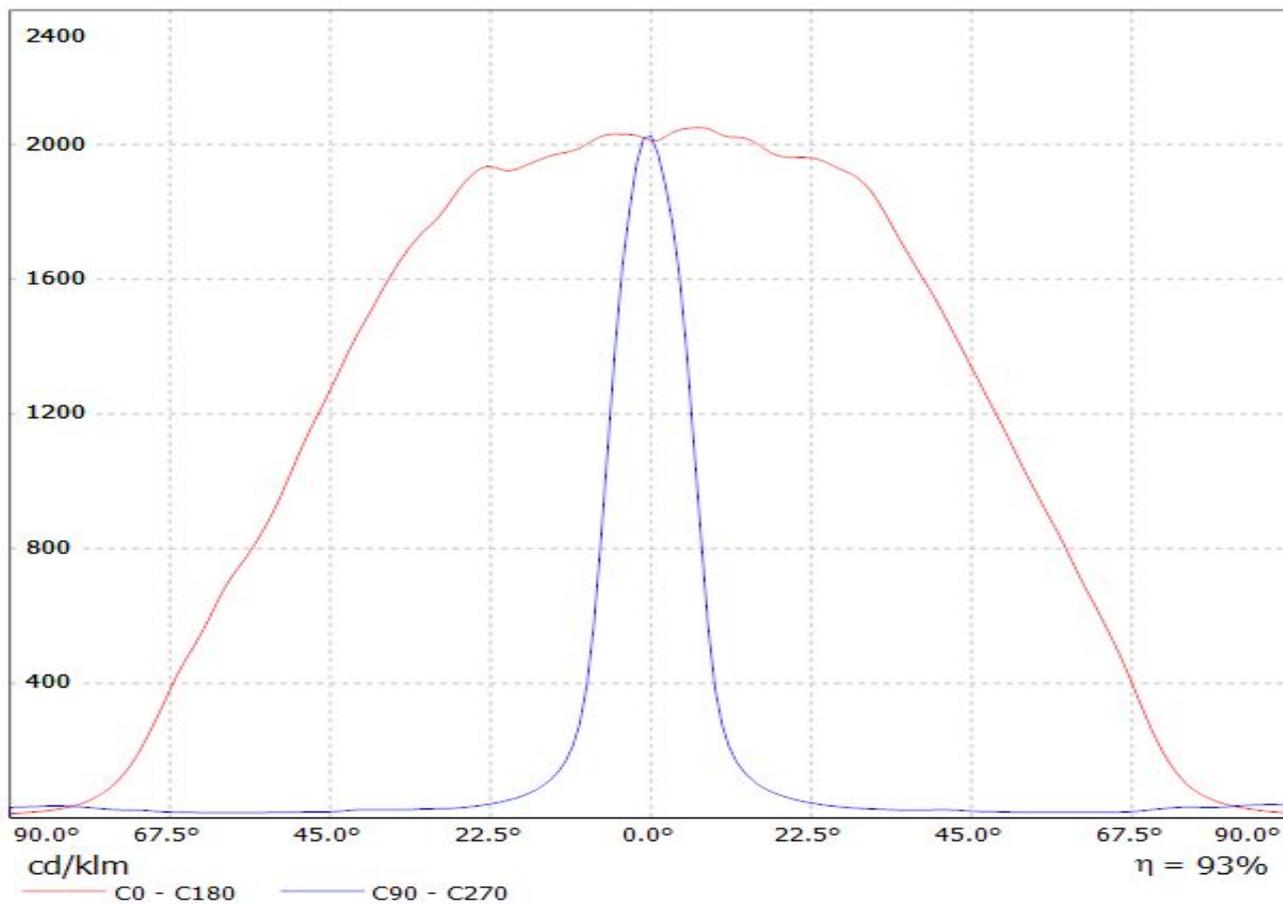


Luminaire: LEDil Oy C13012_FLARE-MAXI-D_(Z5M1) Efficiency=94%
Lamps: 1 x Seoul Z5M1 (SZ5M1-W0-C8/W1-A5-G) 108lm @ 250mA CCT=9100K P=0.8W I=250mA

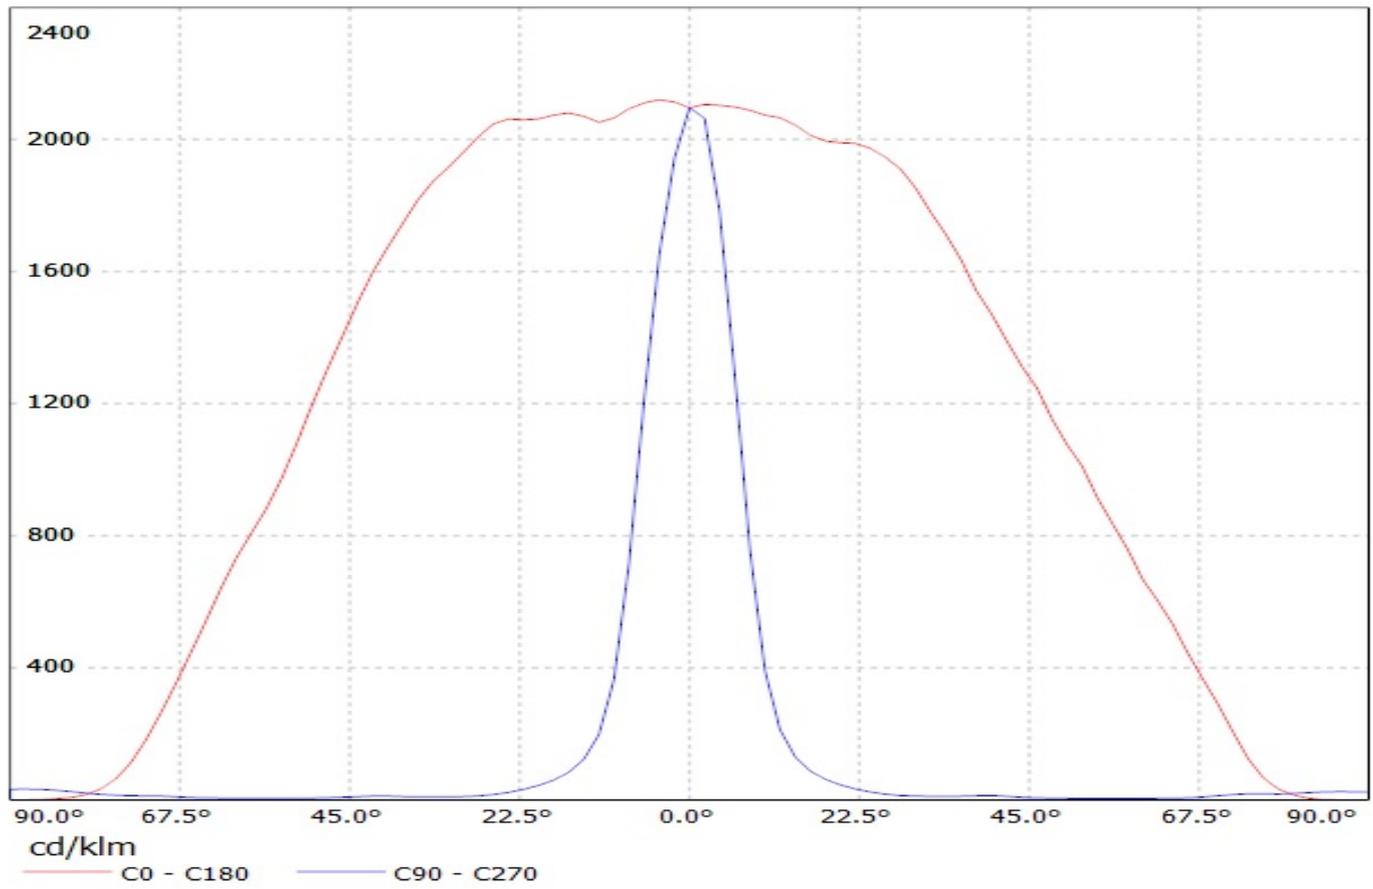


Luminaire: Ledil oy C13012_FLARE-MAXI-D (Luxeon A 64lm @ 250mA) Efficiency=94%
Lamps: 1 x Luxeon A 64lm @ 250mA

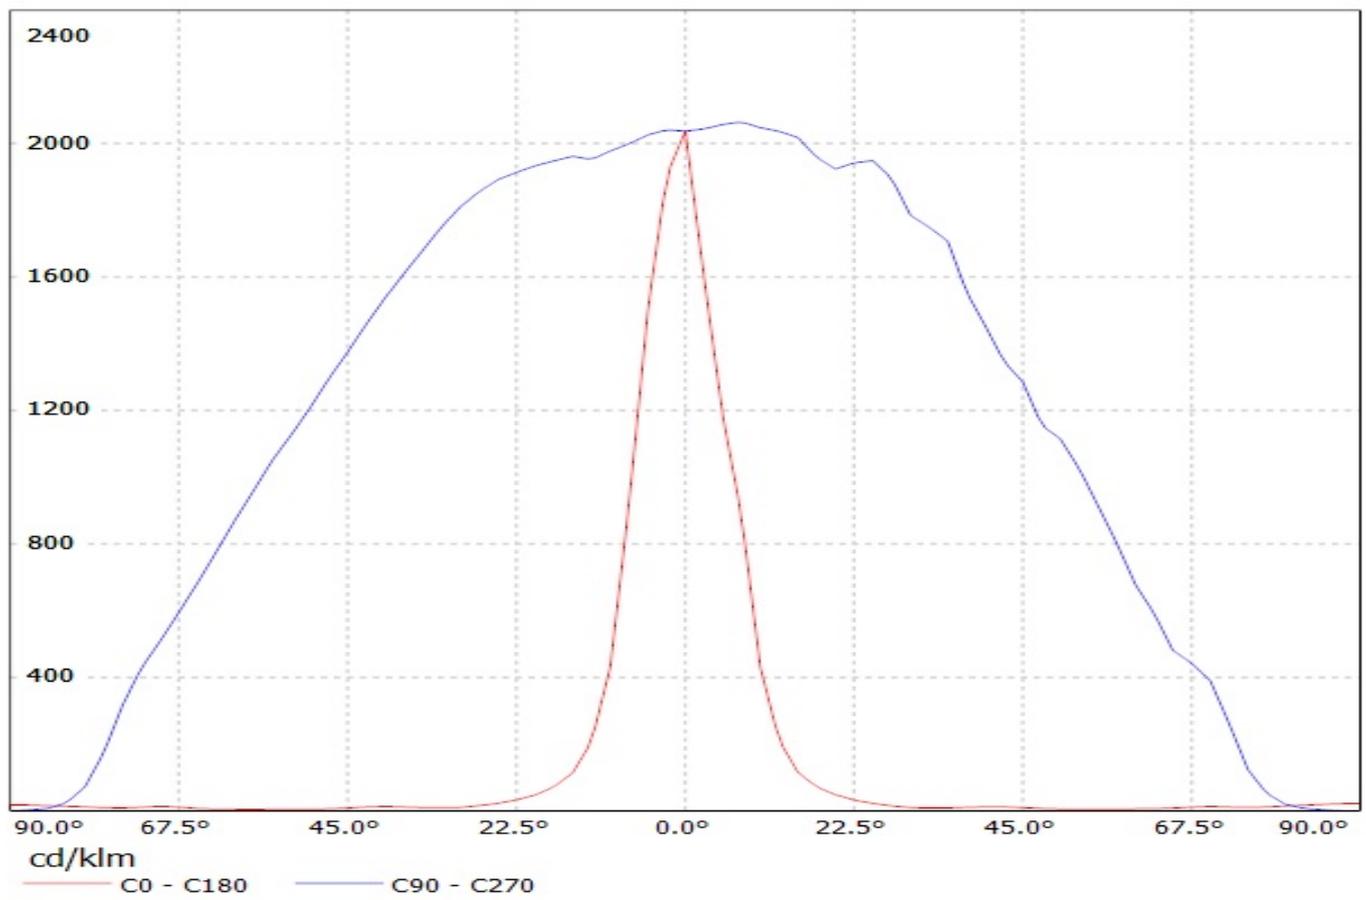

Luminaire: Ledil Oy C13012_FLARE-MAXI-D (Osram Square PC 88lm @ 250mA) Efficiency=94%
Lamps: 1 x Osram Square PC 88lm @ 250mA

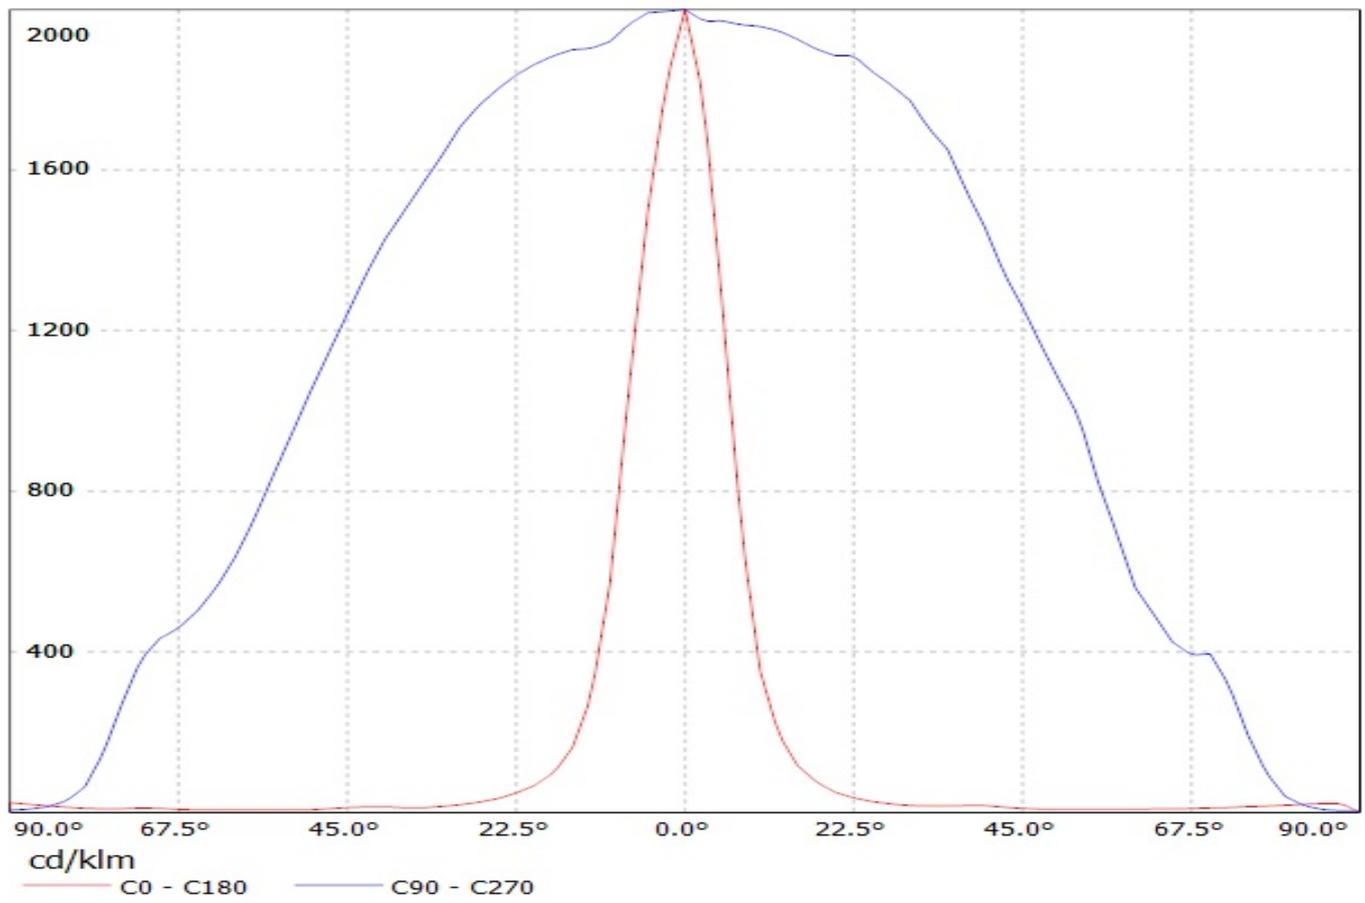


Luminaire: Ledil Oy C13012_FLARE-MAXI-D (Luxeon RE-ES 92lm @ 250mA) Efficiency=94%
Lamps: 1 x Luxeon RE-ES 92lm @ 250mA

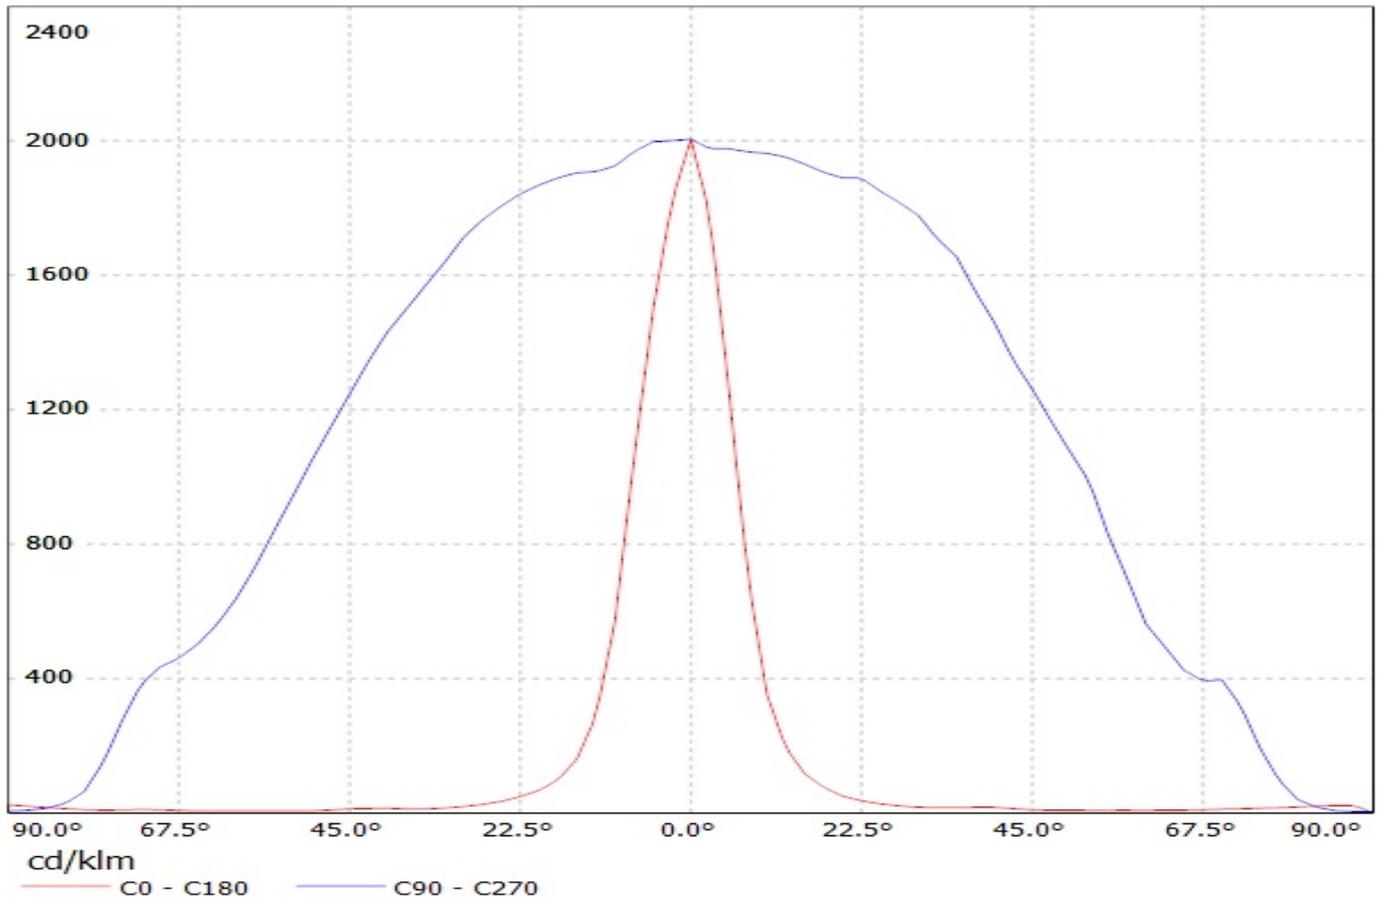


Luminaire: LEDiL Oy C13012_FLARE-MAXI-D_(CREE_XHP50_COOL_WHITE)


Lamps: 1 x CREE_XHP50_COOL_WHITE_242.068lm@250mA_CCT=COOLWHITE_I=02499mA_P=1.42958

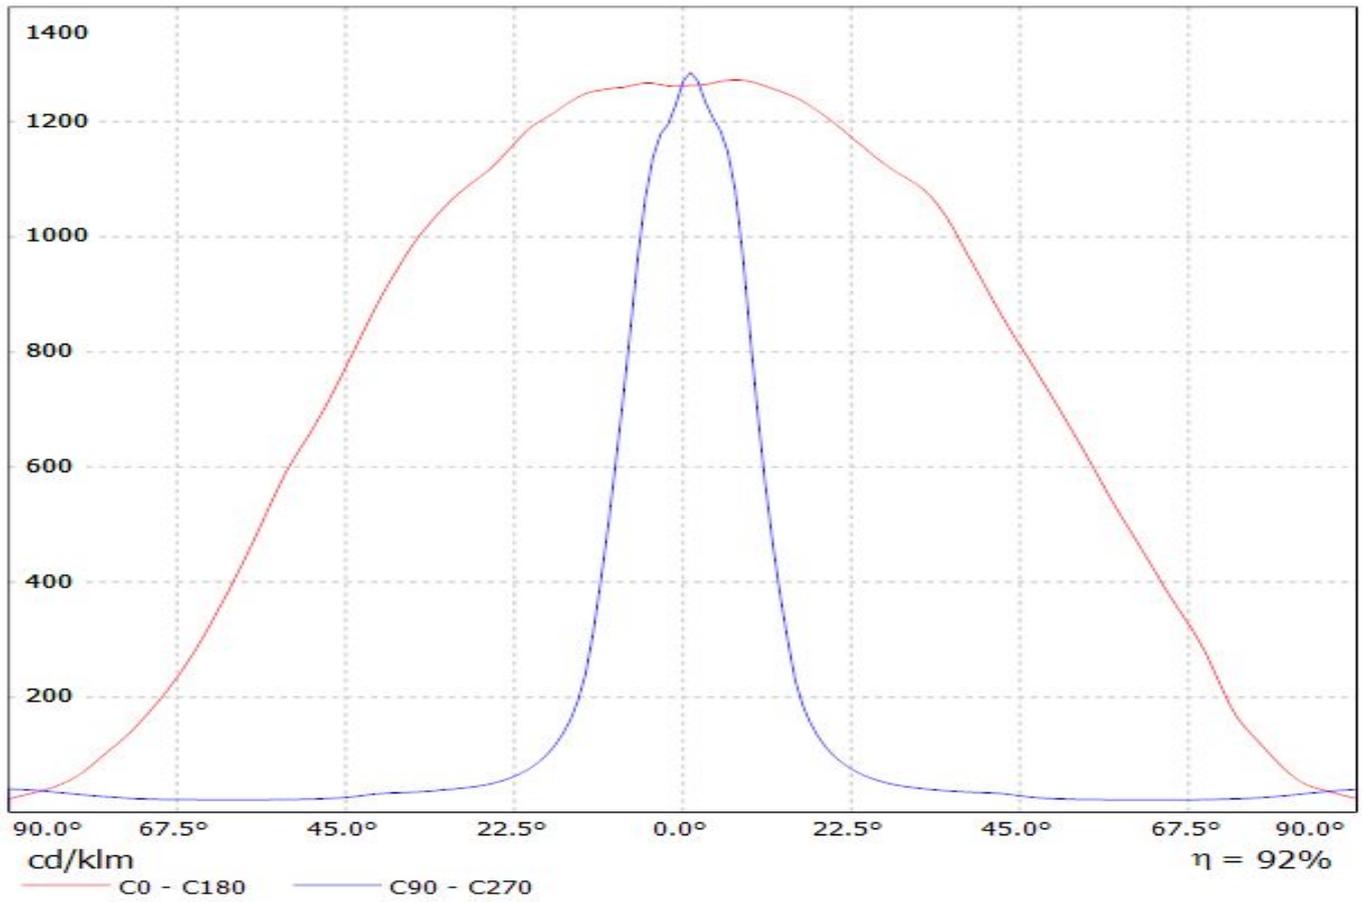


Luminaire: EVERFINE C13012_FLARE-MAXI-D (CREE_XHP70)
Lamps: 1 x CREE_XHP70_288.639lm@250mA_P=2.69892W_J=0.2499A

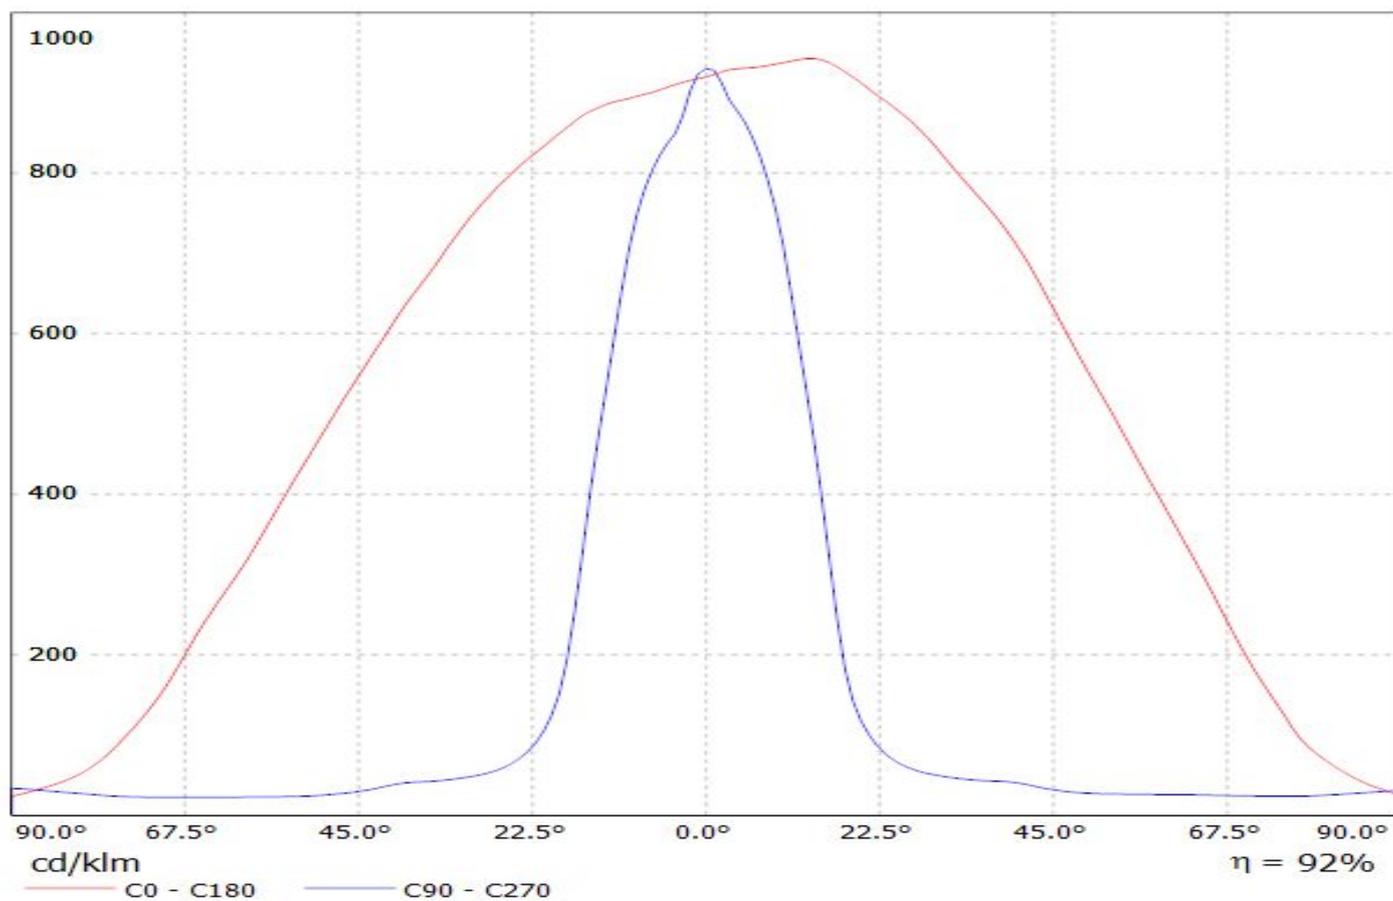


Luminaire: Ledil Oy C13012_FLARE-MAXI-D (Cree XP-G2 98lm @ 250mA) Efficiency=94%
Lamps: 1 x Cree XP-G2 98lm @ 250mA CCT=6596K P=0,75W I=250mA

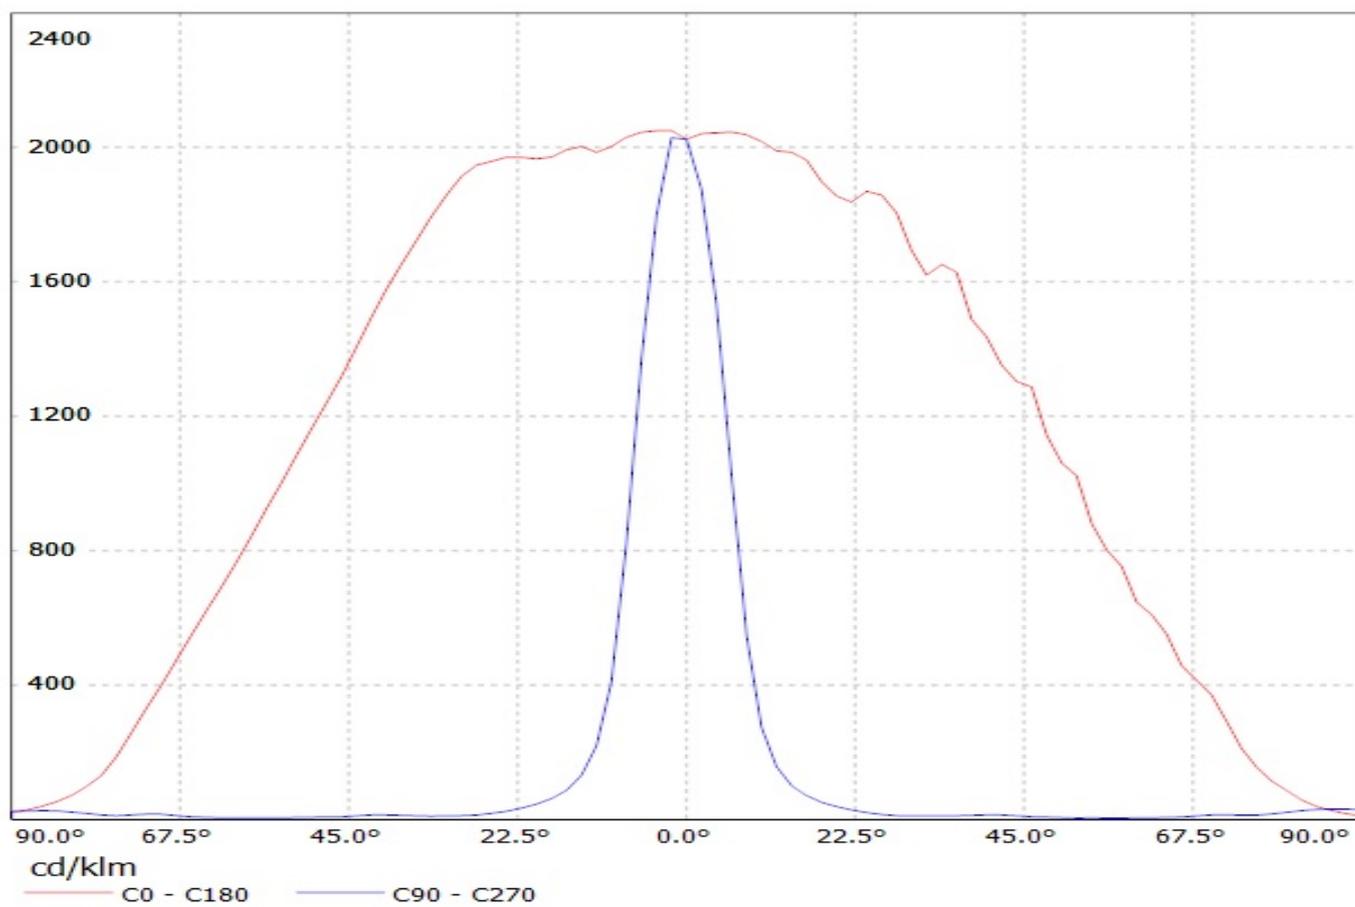


Luminaire: Ledil Oy C13012_FLARE-MAXI-D_(NCSxx19B) Efficiency=94%
Lamps: 1 x Nichia NSCxx19B (NCSL119BE) 88lm @ 250mA CCT=3000K P=0.8W I=250mA

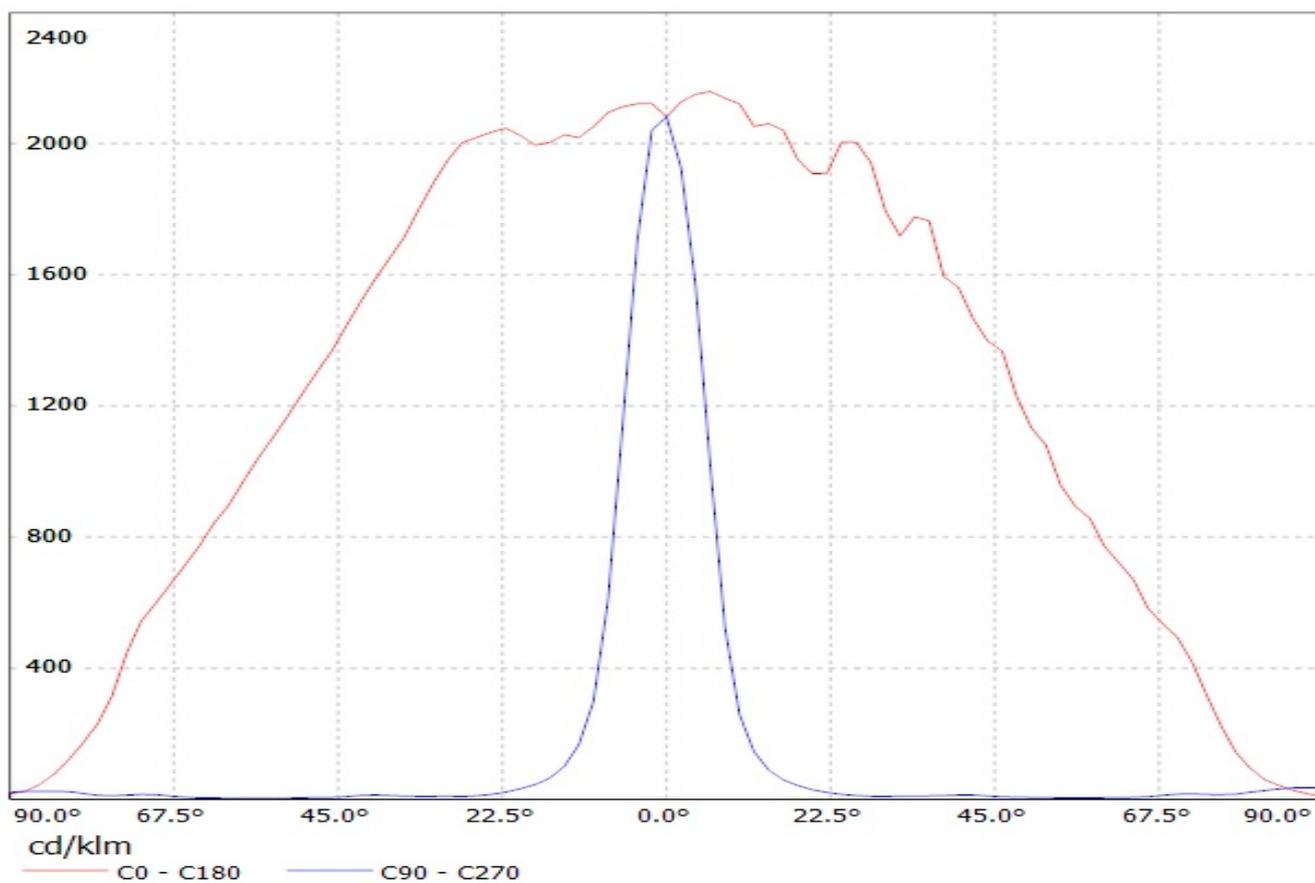


Luminaire: Ledil Oy C13012_FLARE-MAXI-D (Cree XM-L 97lm @ 250mA) Efficiency=94%
Lamps: 1 x Cree XM-L 97lm @ 250mA

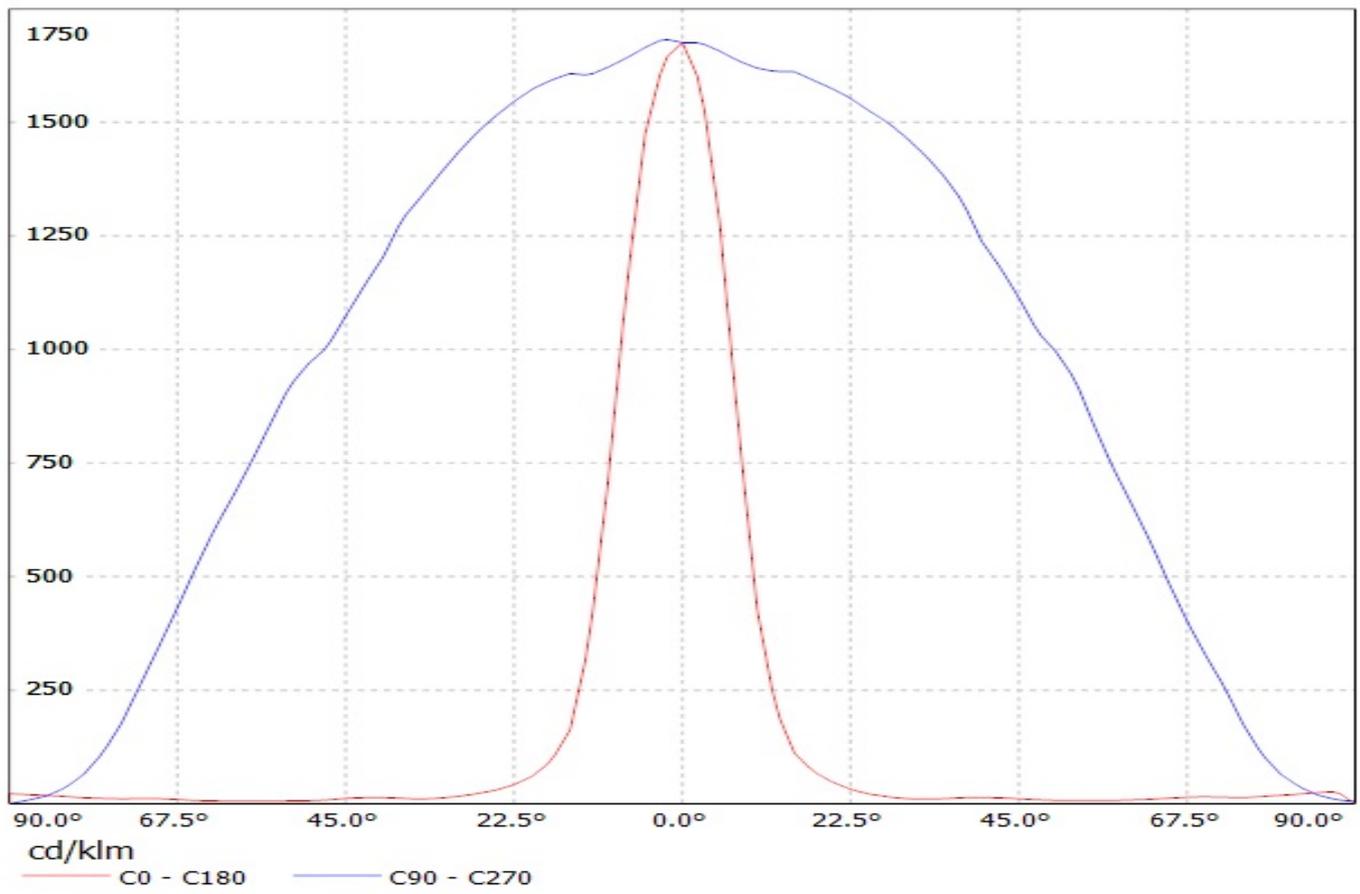


Luminaire: LEDiL Oy C13012_FLARE-MAXI-D Eff.93.2%
Lamps: 1 x Nichia NS9x383(107.656lm@250mA)

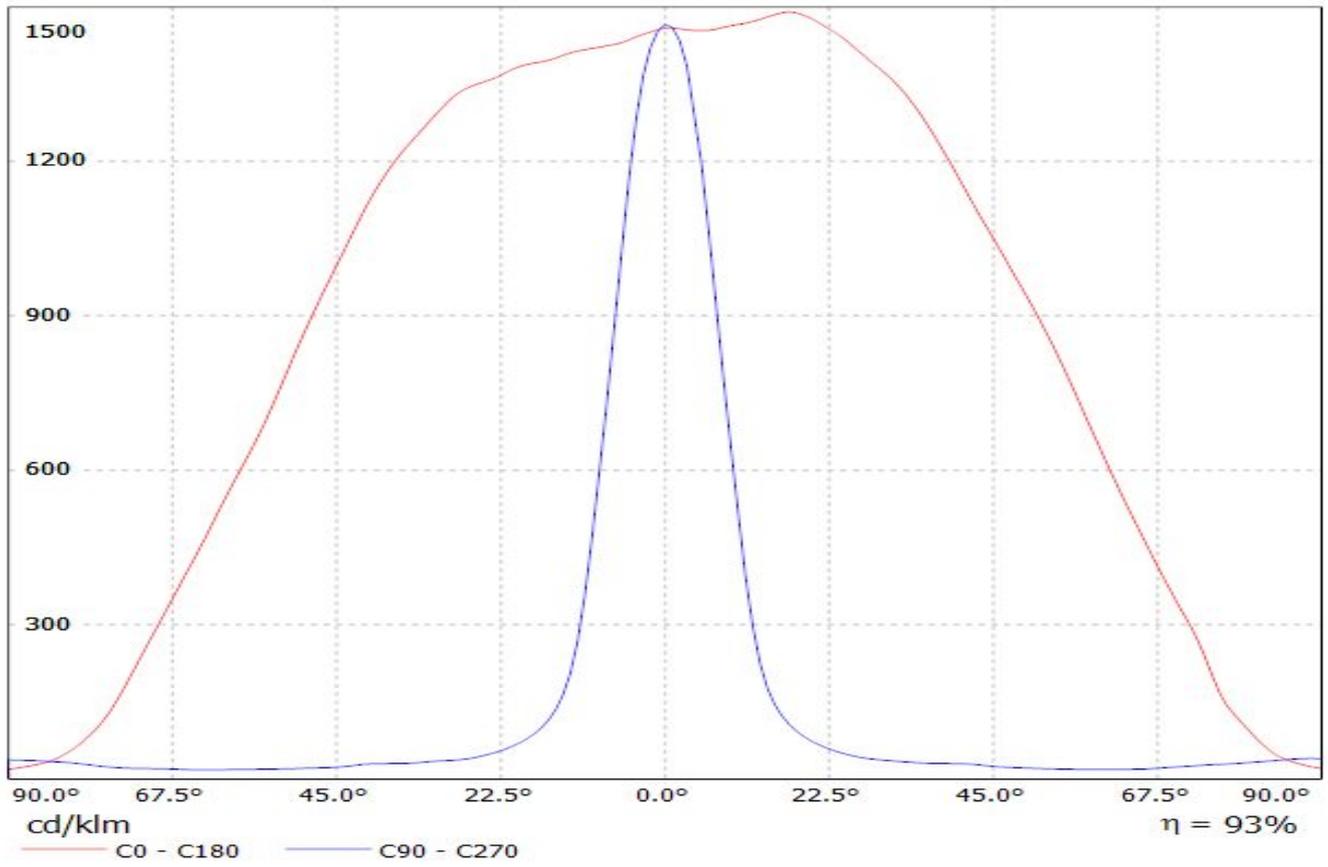


Luminaire: Ledil Oy C13012_FLARE-MAXI-D (Cree XP-G 70lm @ 250mA) Efficiency=94%
Lamps: 1 x Cree XP-G 70lm @ 250mA

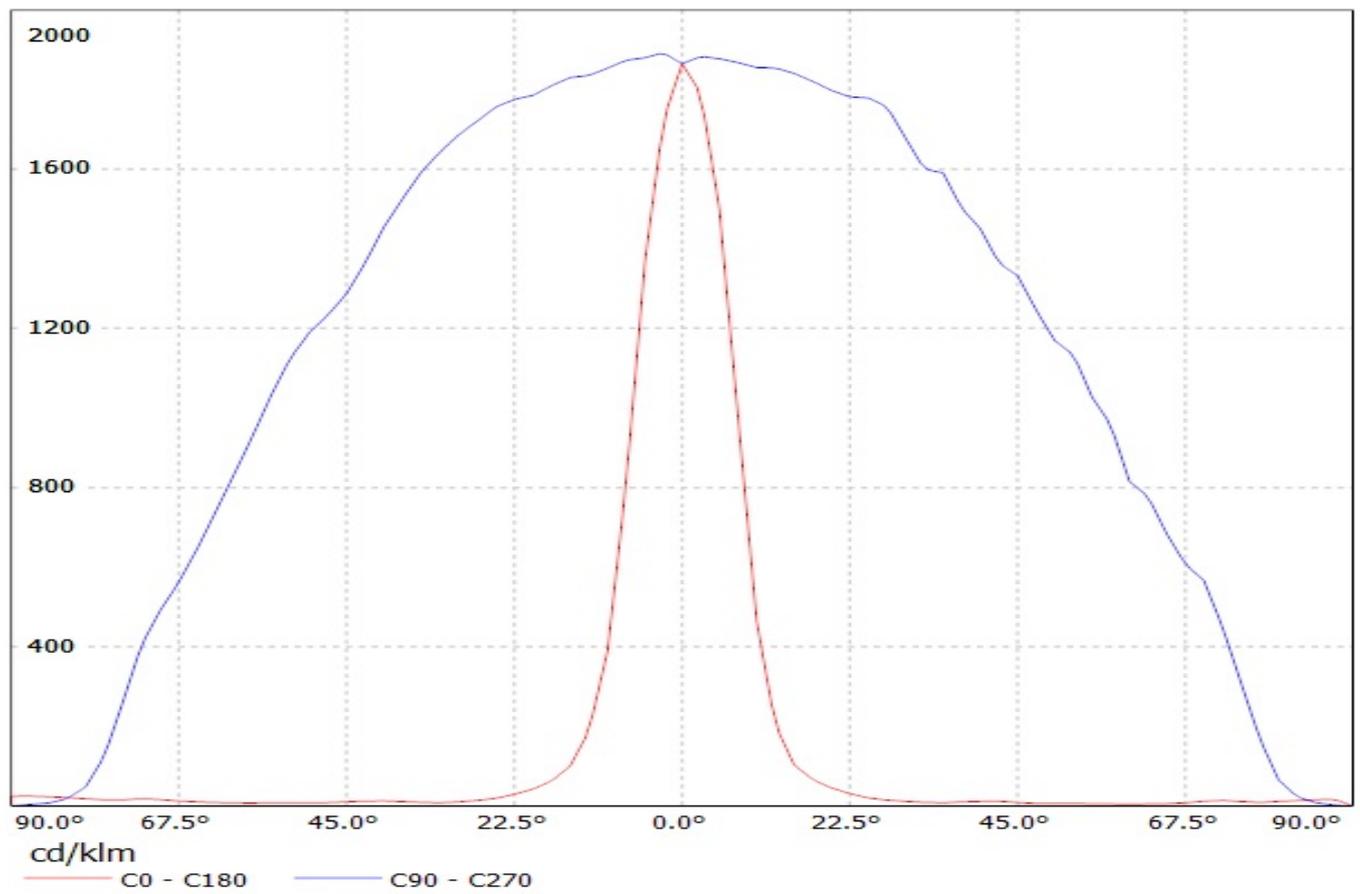


Luminaire: Ledil Oy C13012_FLARE-MAXI-D (Nichia 219B 103lm @ 250mA) Efficiency=94%
Lamps: 1 x Nichia 219B 103lm @ 250mA

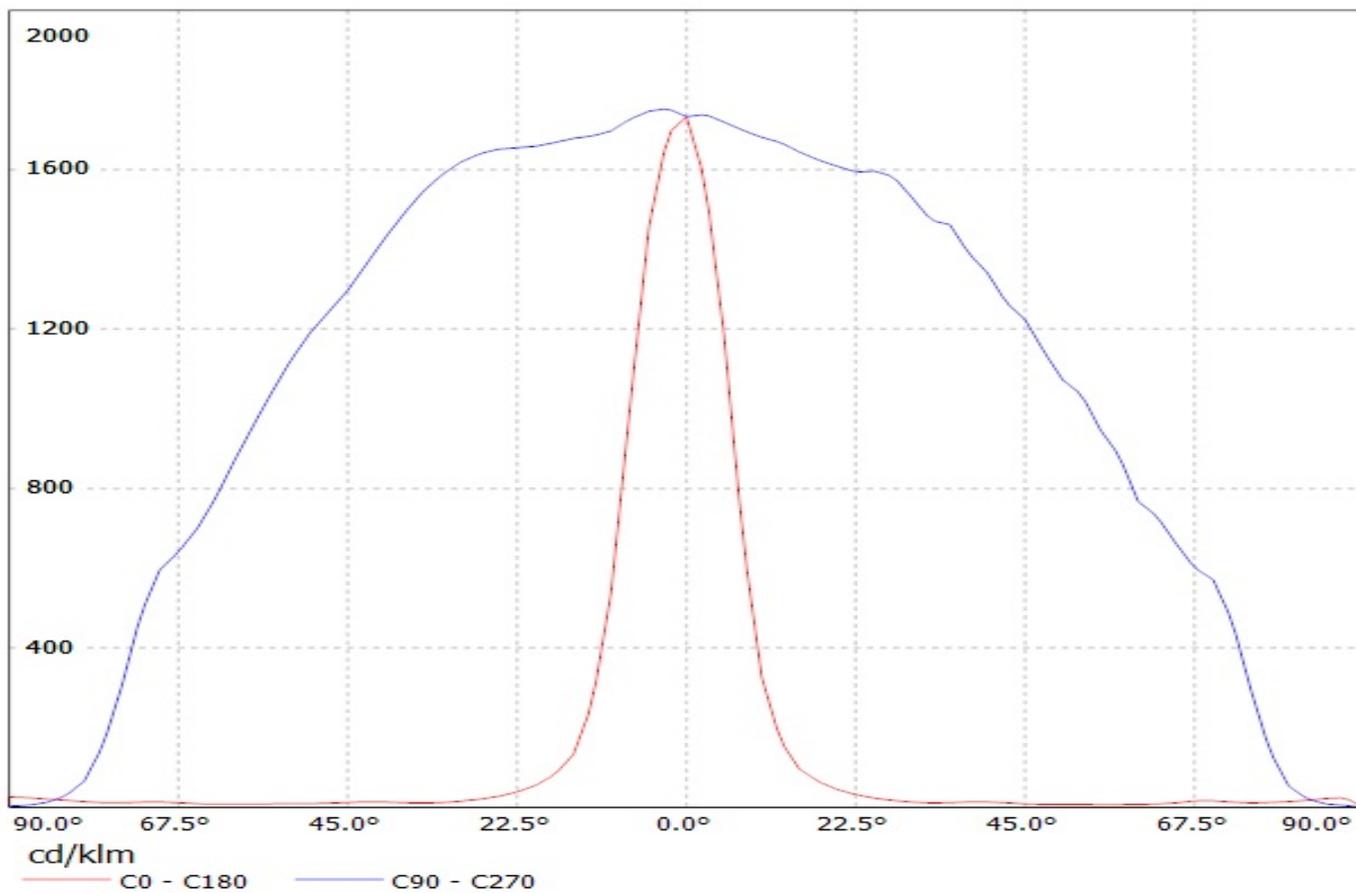


Luminaire: Ledil Oy C13012_FLARE-MAXI-D (Cree XT-E 98lm @ 250mA) Efficiency=94%
Lamps: 1 x Cree XT-E 98lm @ 250mA

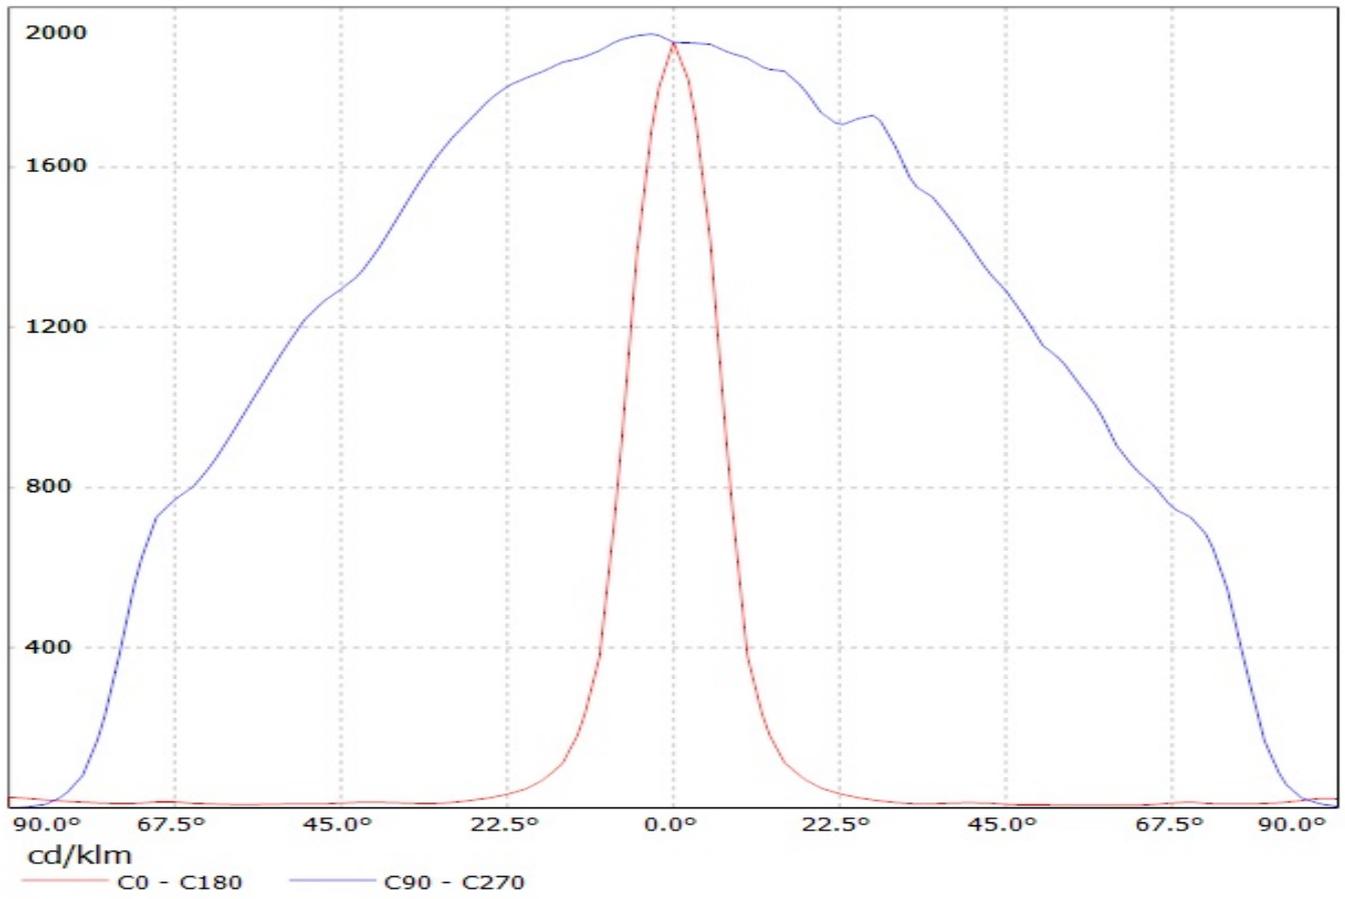


Luminaire: LEDiL Oy C13012_FLARE-MAXI-D_(XP-L)
Lamps: 1 x Cree_XP-L_130lm@250mA_P=0.73723W_I=249.9mA

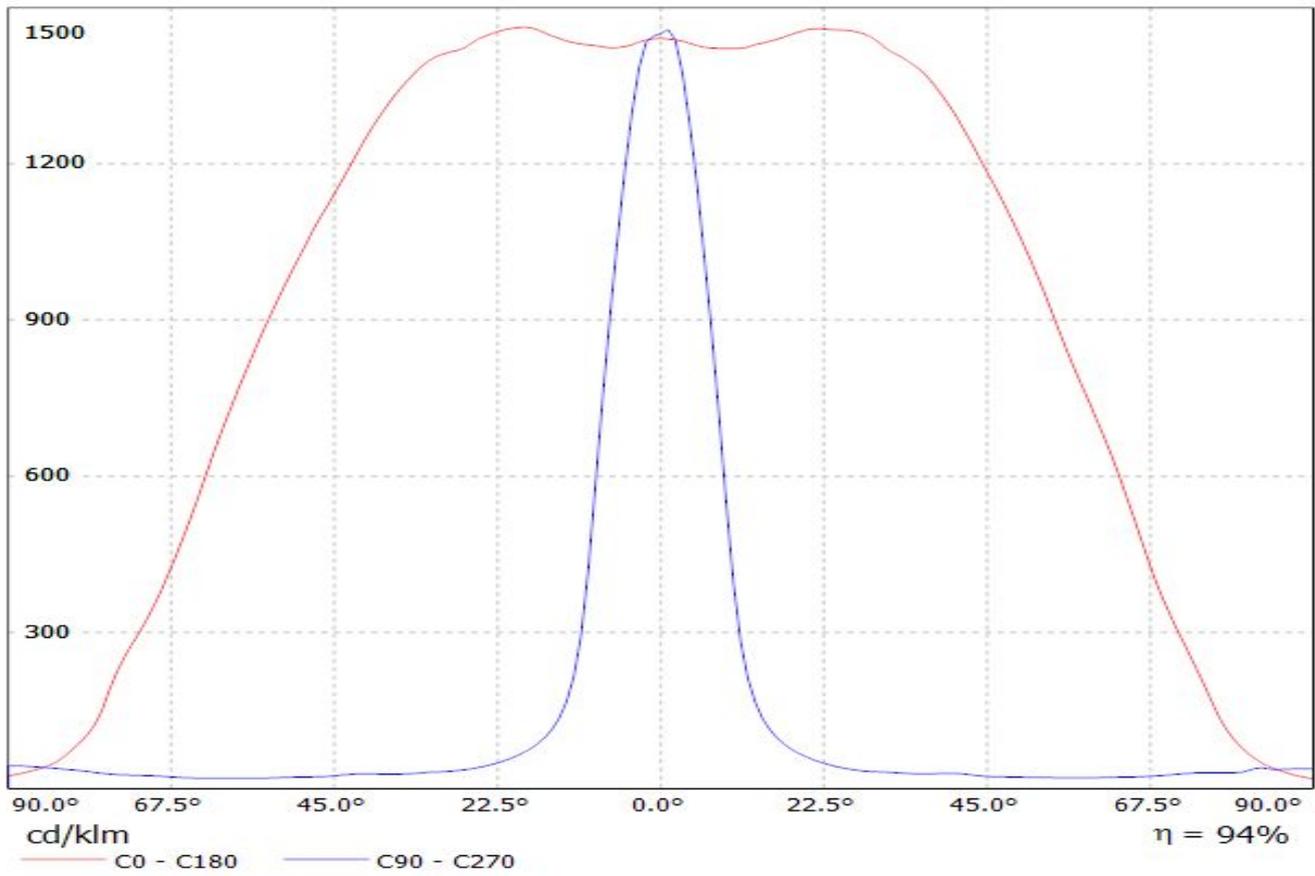

Luminaire: LEDil Oy C13012_FLARE-MAXI-D_(Oslon_SSL_150)
Lamps: 1 x Osram Oslon SSL 150 (78.52lm @ 250mA) P=0.7W I=250mA

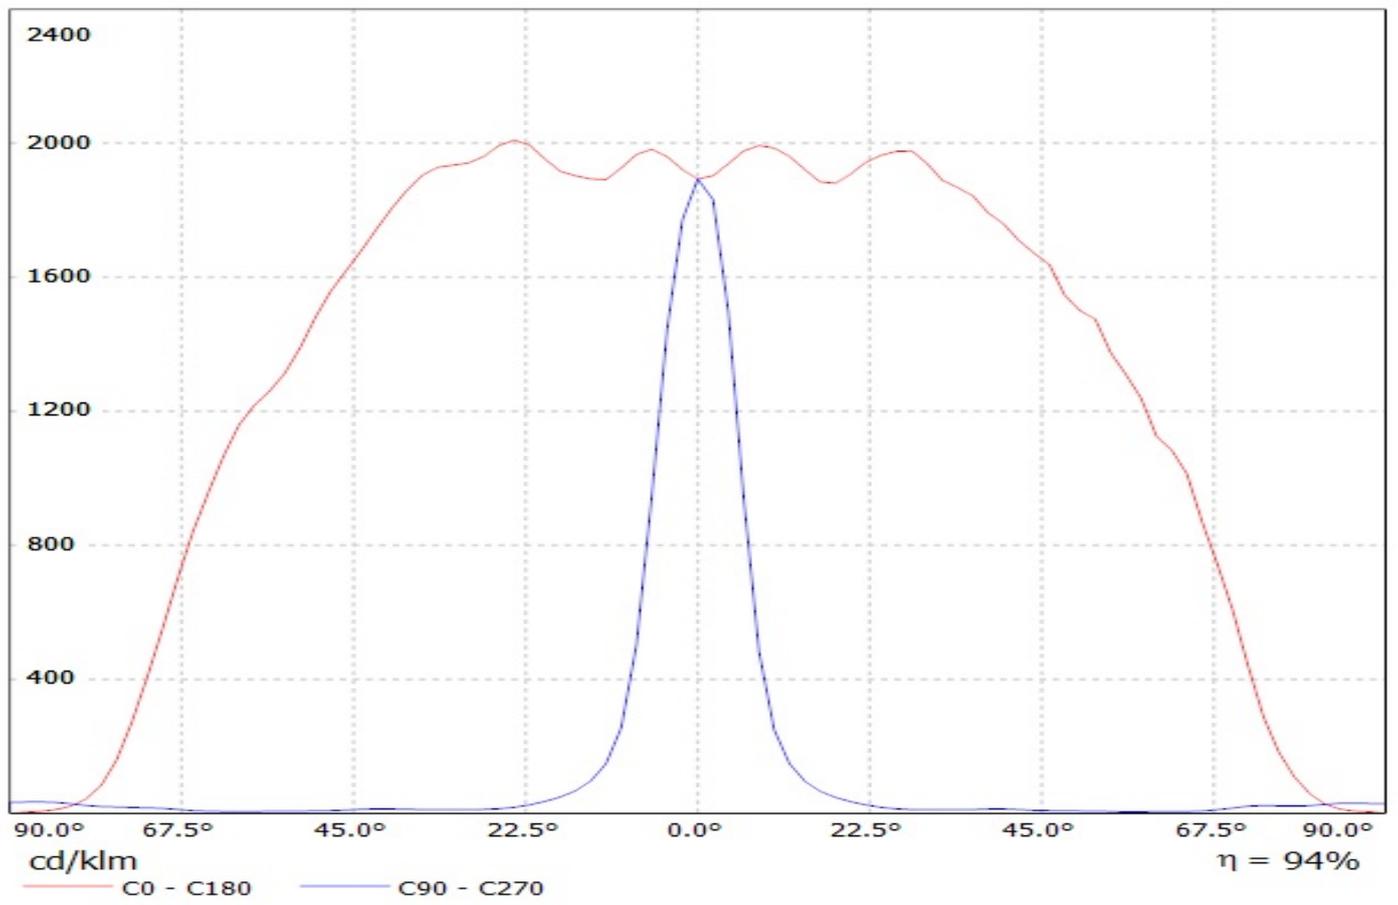

Luminaire: LEDiL Oy C13012_FLARE-MAXI-D_(LH351Z) Eff.94.1%
Lamps: 1 x SAMSUNG_LH351Z_90.8111lm@250mA_P=0.748076W_I=249.9mA

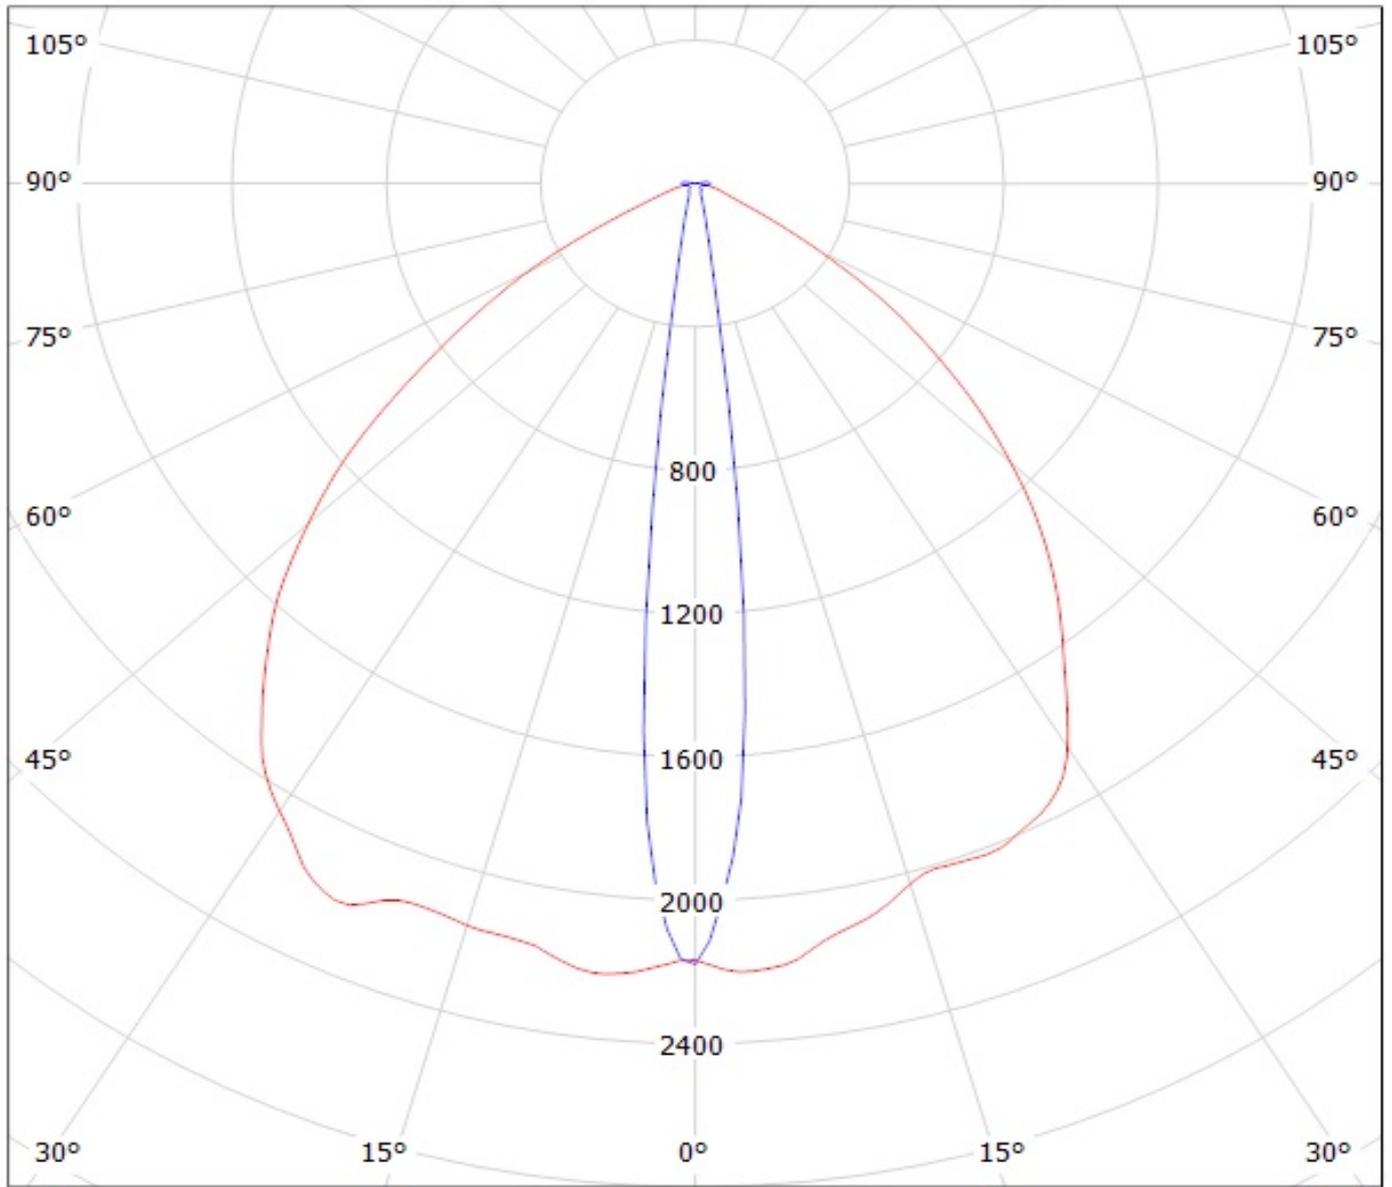


cd/klm

— C0 - C180

— C90 - C270

Luminaire: Ledil Oy C13012_FLARE-MAXI-D (Osam Square EC 66lm @250mA) Efficiency=94%
Lamps: 1 x Osam Square EC 66lm @250mA

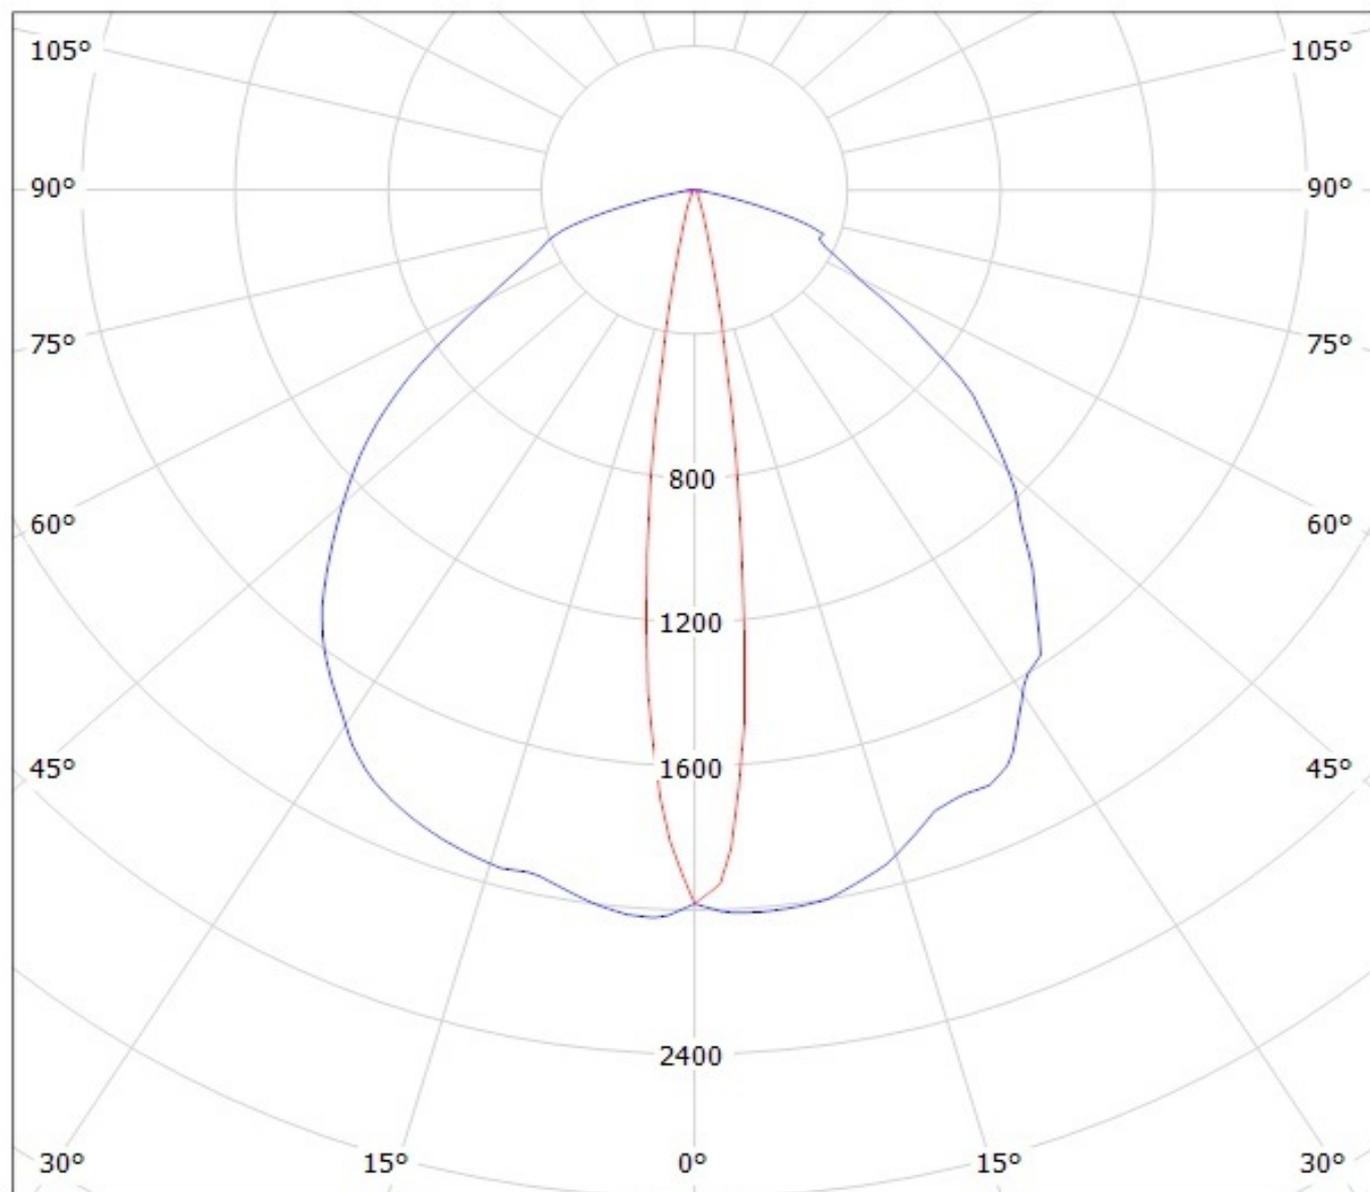

cd/klm


— C0 - C180

— C90 - C270

LEDiL Oy C13012_FLARE-MAXI-D_(MKR) Eff.92.2% / LDC (Polar)

Luminaire: LEDiL Oy C13012_FLARE-MAXI-D_(MKR) Eff.92.2%

Lamps: 1 x CREE_MKR (368.505lm@250mA)

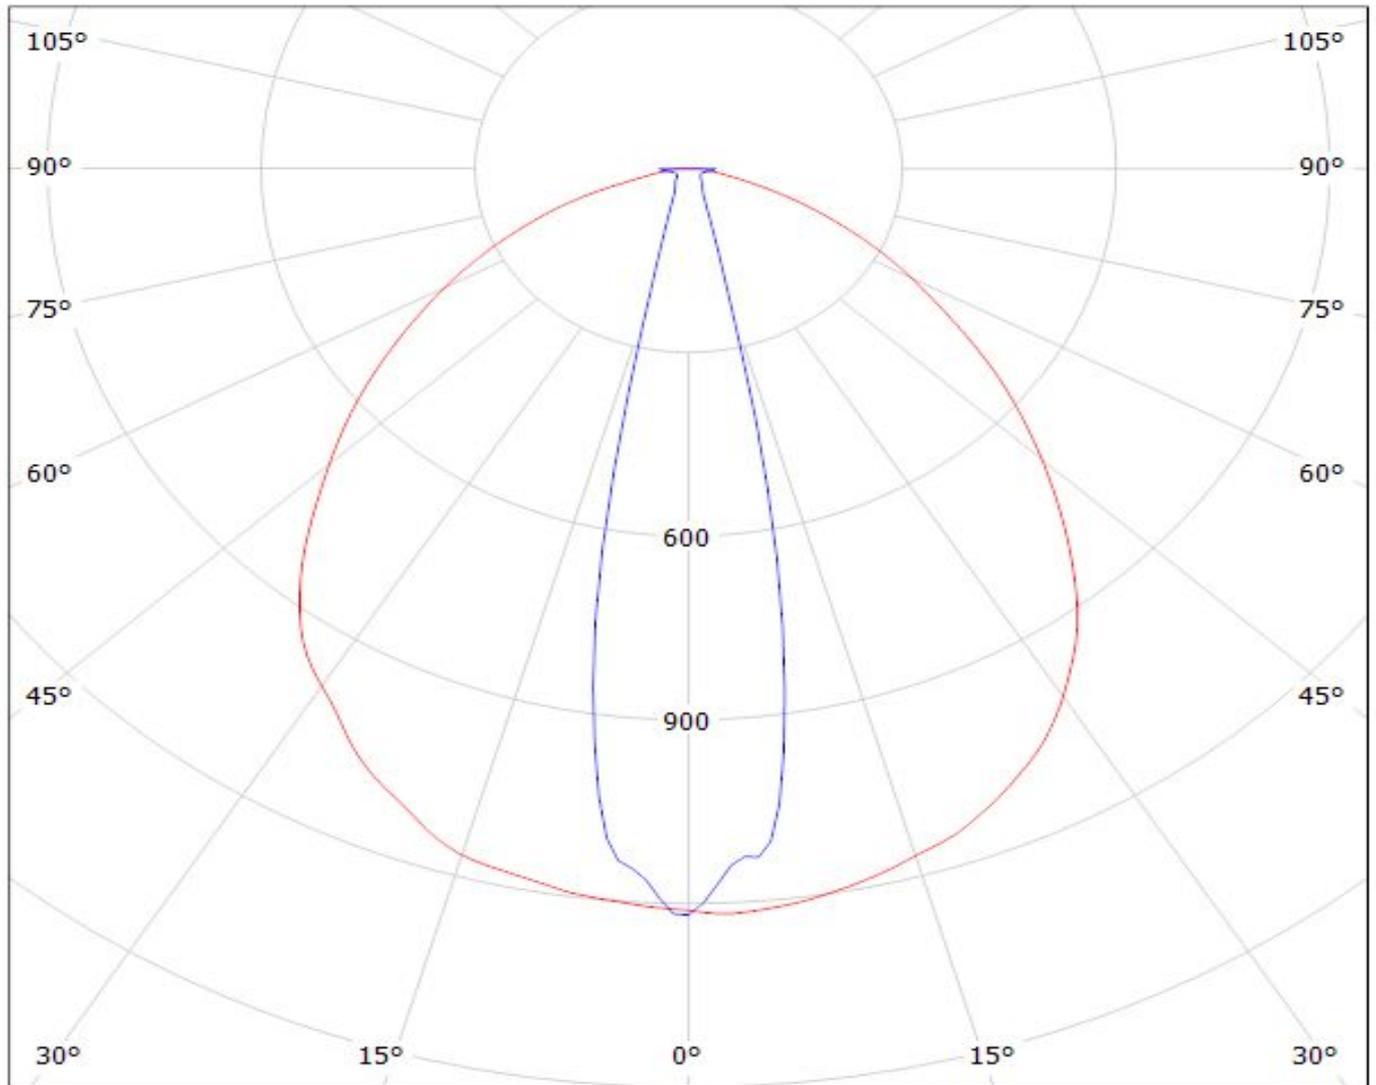

cd/klm


$\eta = 92\%$

— C0 - C180

— C90 - C270

Luminaire: LEDil Oy C13012_FLARE-MAXI-D_(XM-L2) Efficiency=94%

Lamps: 1 x Cree XM-L2 (XMLBWT-0-7B4-T30-0L-0001) 91lm @ 250mA CCT=3200K P=0.7W I=250mA

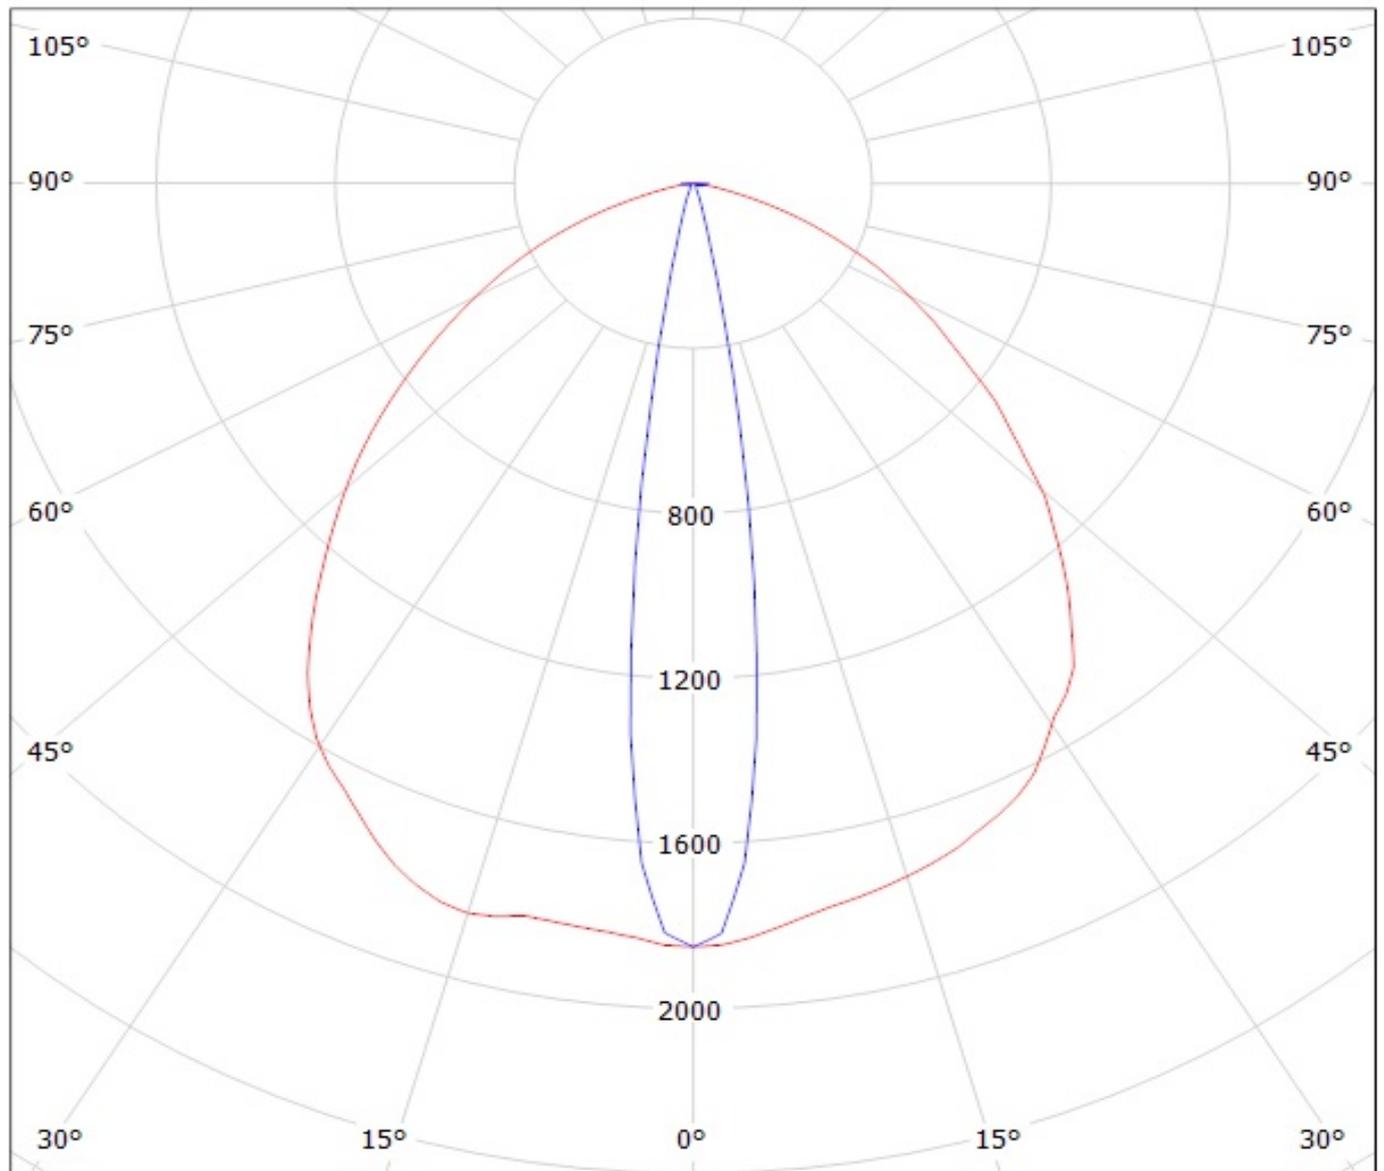


cd/klm

— C0 - C180

— C90 - C270

Luminaire: LEDil Oy C13012_FLARE-MAXI-D_(Luxeon_MZ) Efficiency=94%
Lamps: 1 x Philips Lumileds Luxeon MZ (389lm @ 250mA) CCT=3800K P=2.8W I=250mA

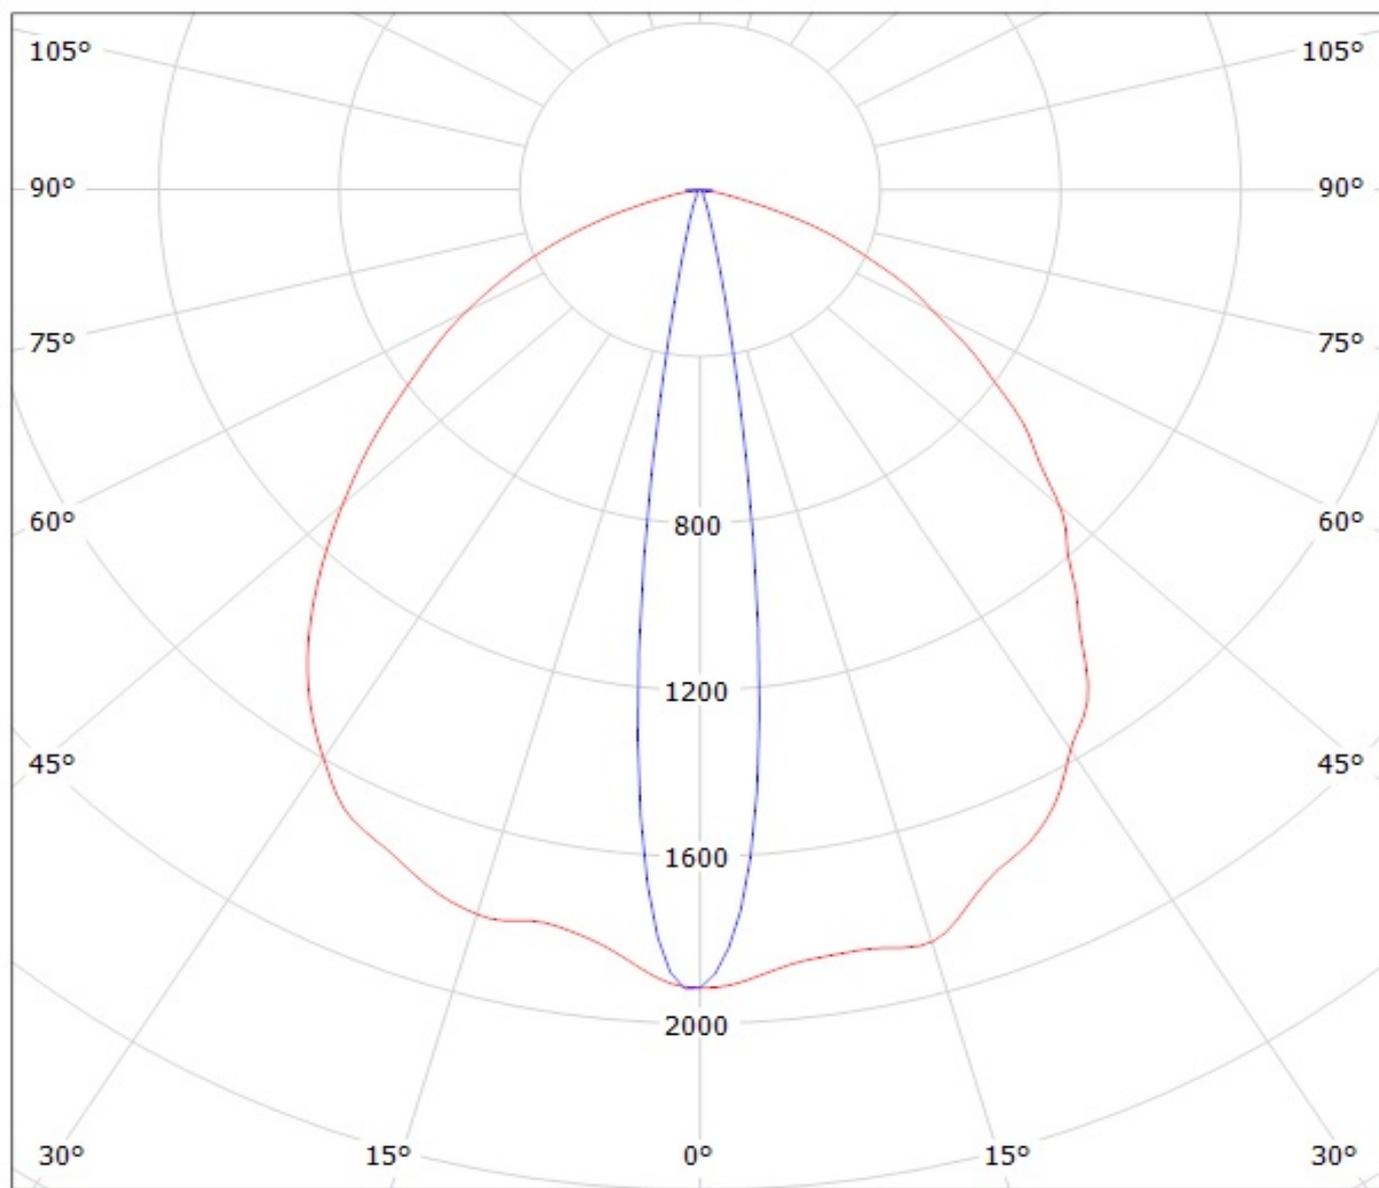


cd/klm

— C0 - C180

— C90 - C270

Luminaire: LEDiL Oy C13012_FLARE-MAXI-D_(LUXEON_T) Eff.92.0%
Lamps: 1 x LUXEON T (74lm@250mA)

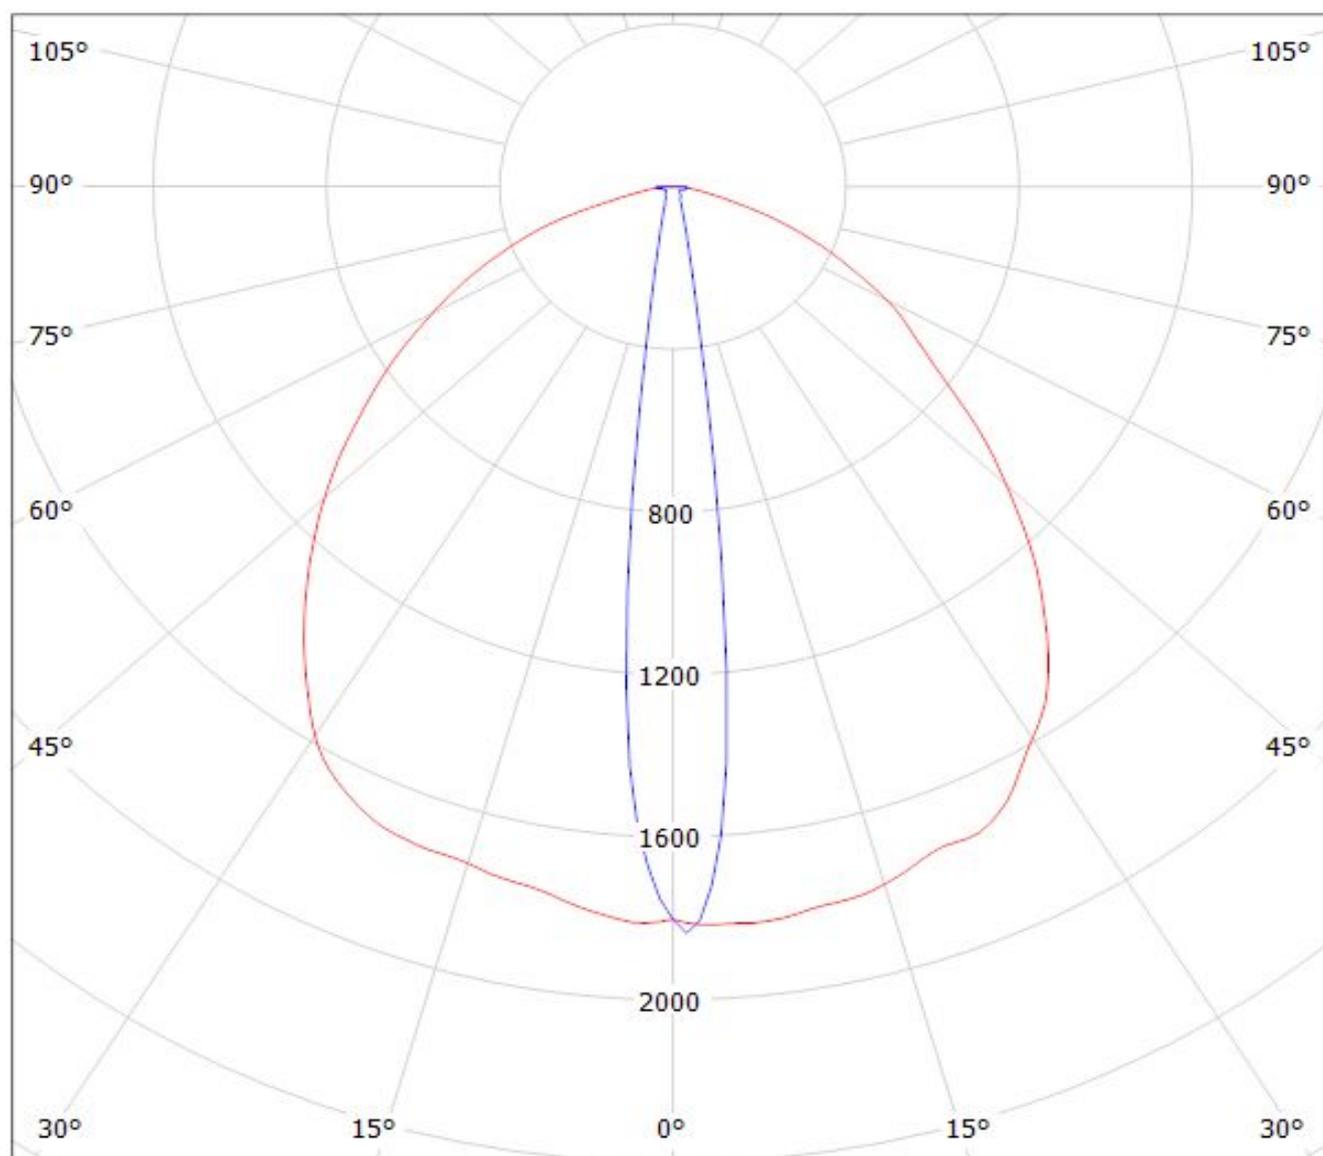


cd/klm

$\eta = 92\%$

— C0 - C180 — C90 - C270

Luminaire: Ledil Oy C13012_FLARE-MAXI-D (Luxeon M 342lm @250mA) Efficiency=94%
Lamps: 1 x Luxeon M 342lm @250mA

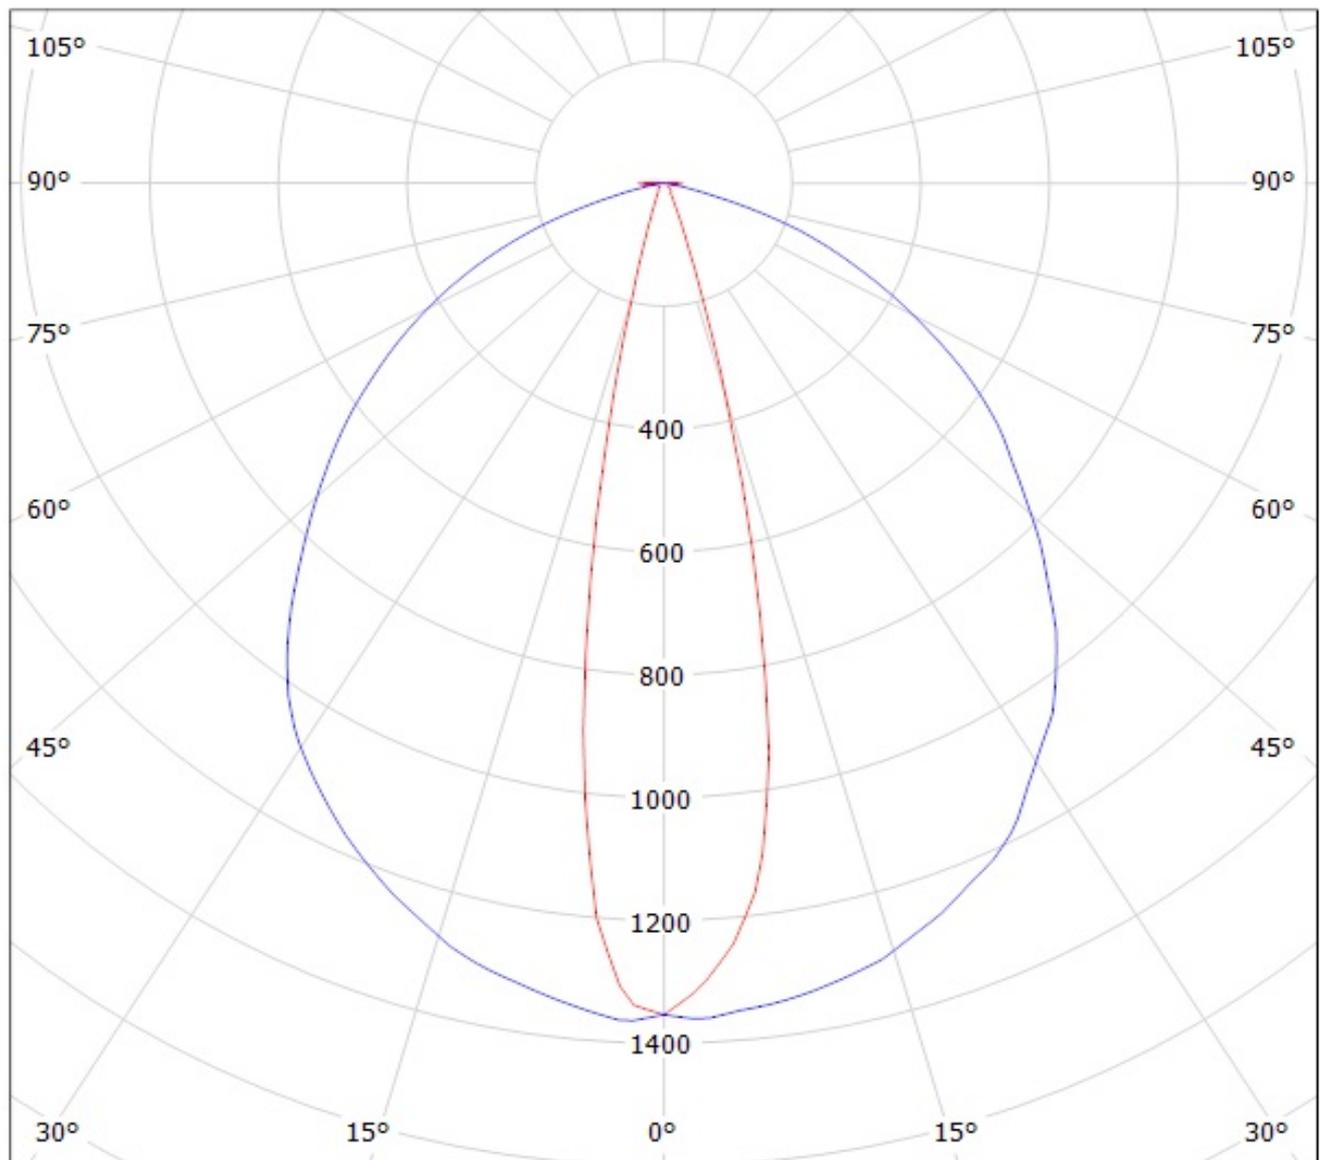


cd/klm

— C0 - C180 — C90 - C270

Luminaire: LEDiL Oy C13012_FLARE-MAXI-D_(Luxeon_TX)

Lamps: 1 x Luxeon_TX_(L1T2-3585)_80.1801lm@250mA_CCT=3500K_P=0.731482W_I=249.9mA

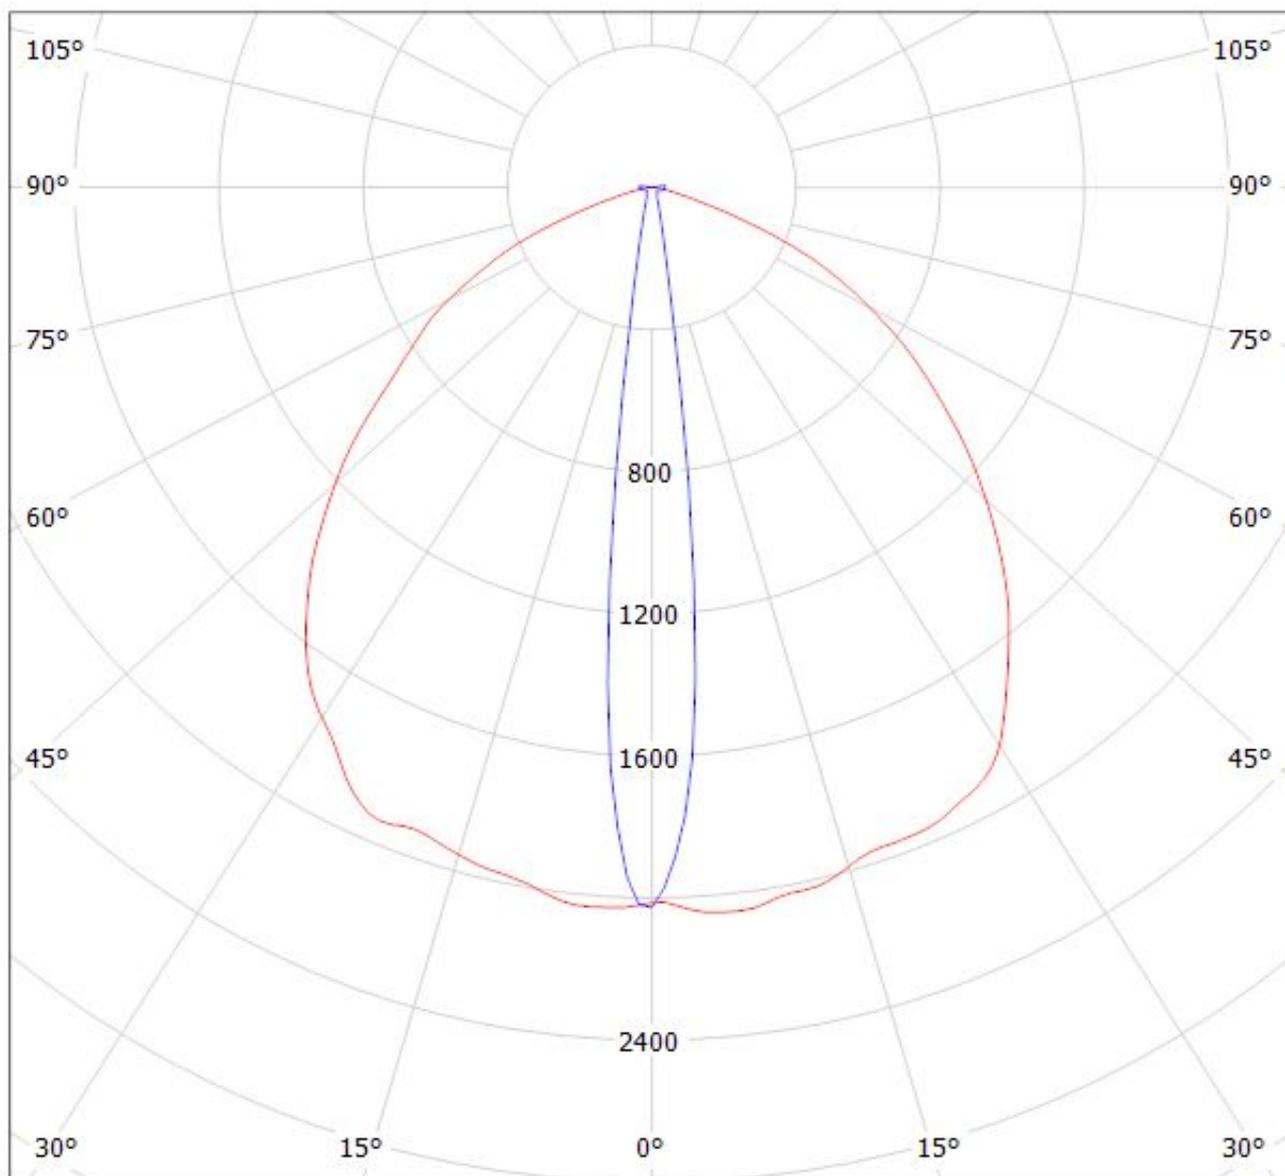


cd/klm

$\eta = 93\%$

— C0 - C180 — C90 - C270

Luminaire: LEDil Oy C13012_FLARE-MAXI-D_(Z5M1) Efficiency=94%

Lamps: 1 x Seoul Z5M1 (SZ5M1-W0-C8/W1-A5-G) 108lm @ 250mA CCT=9100K P=0.8W I=250mA

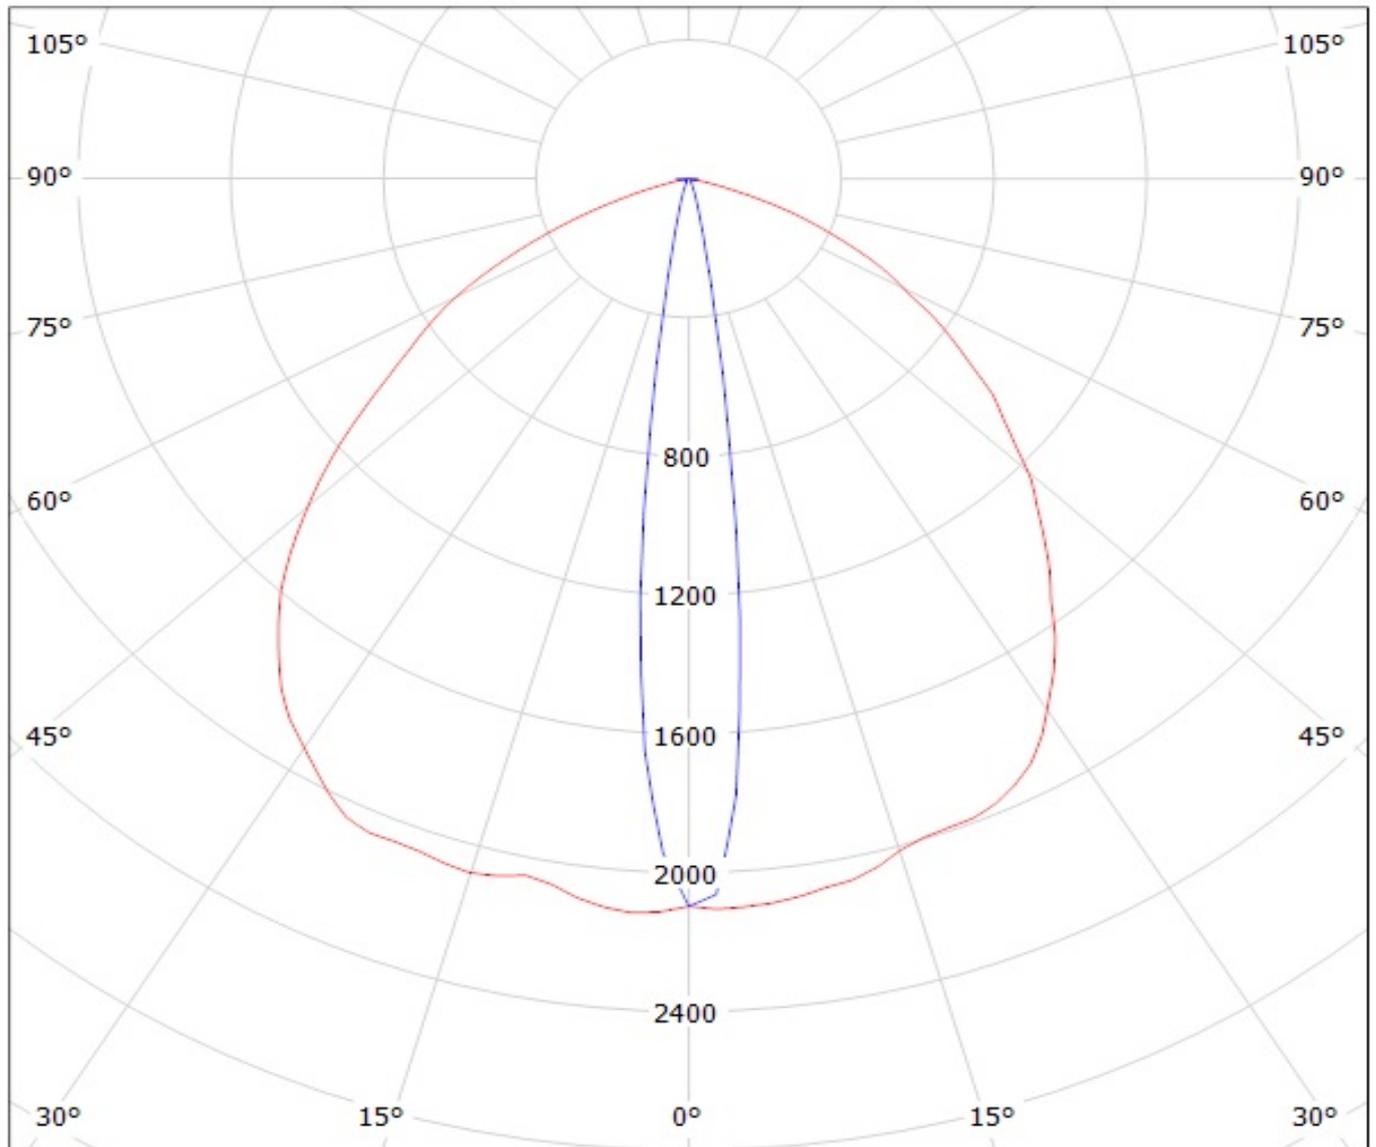


cd/klm

— C0 - C180

— C90 - C270

Luminaire: Ledil oy C13012_FLARE-MAXI-D (Luxeon A 64lm @ 250mA) Efficiency=94%
Lamps: 1 x Luxeon A 64lm @ 250mA

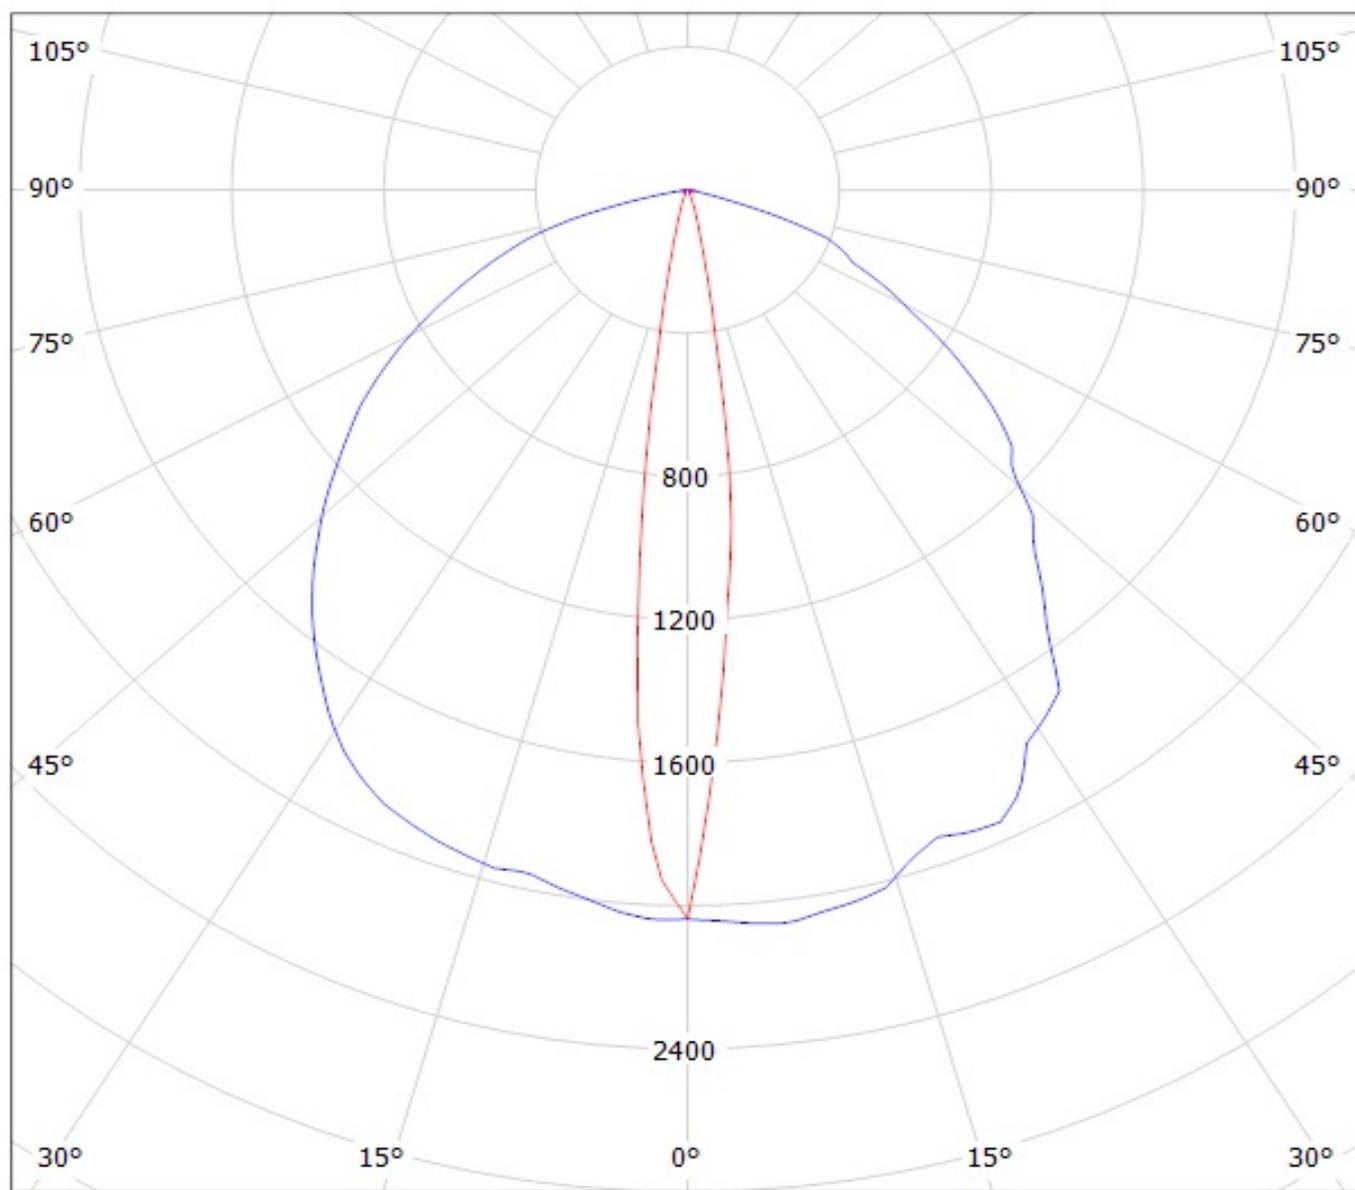


cd/klm

— C0 - C180

— C90 - C270

Luminaire: Ledil Oy C13012_FLARE-MAXI-D (Osram Square PC 88lm @ 250mA) Efficiency=94%
Lamps: 1 x Osram Square PC 88lm @ 250mA

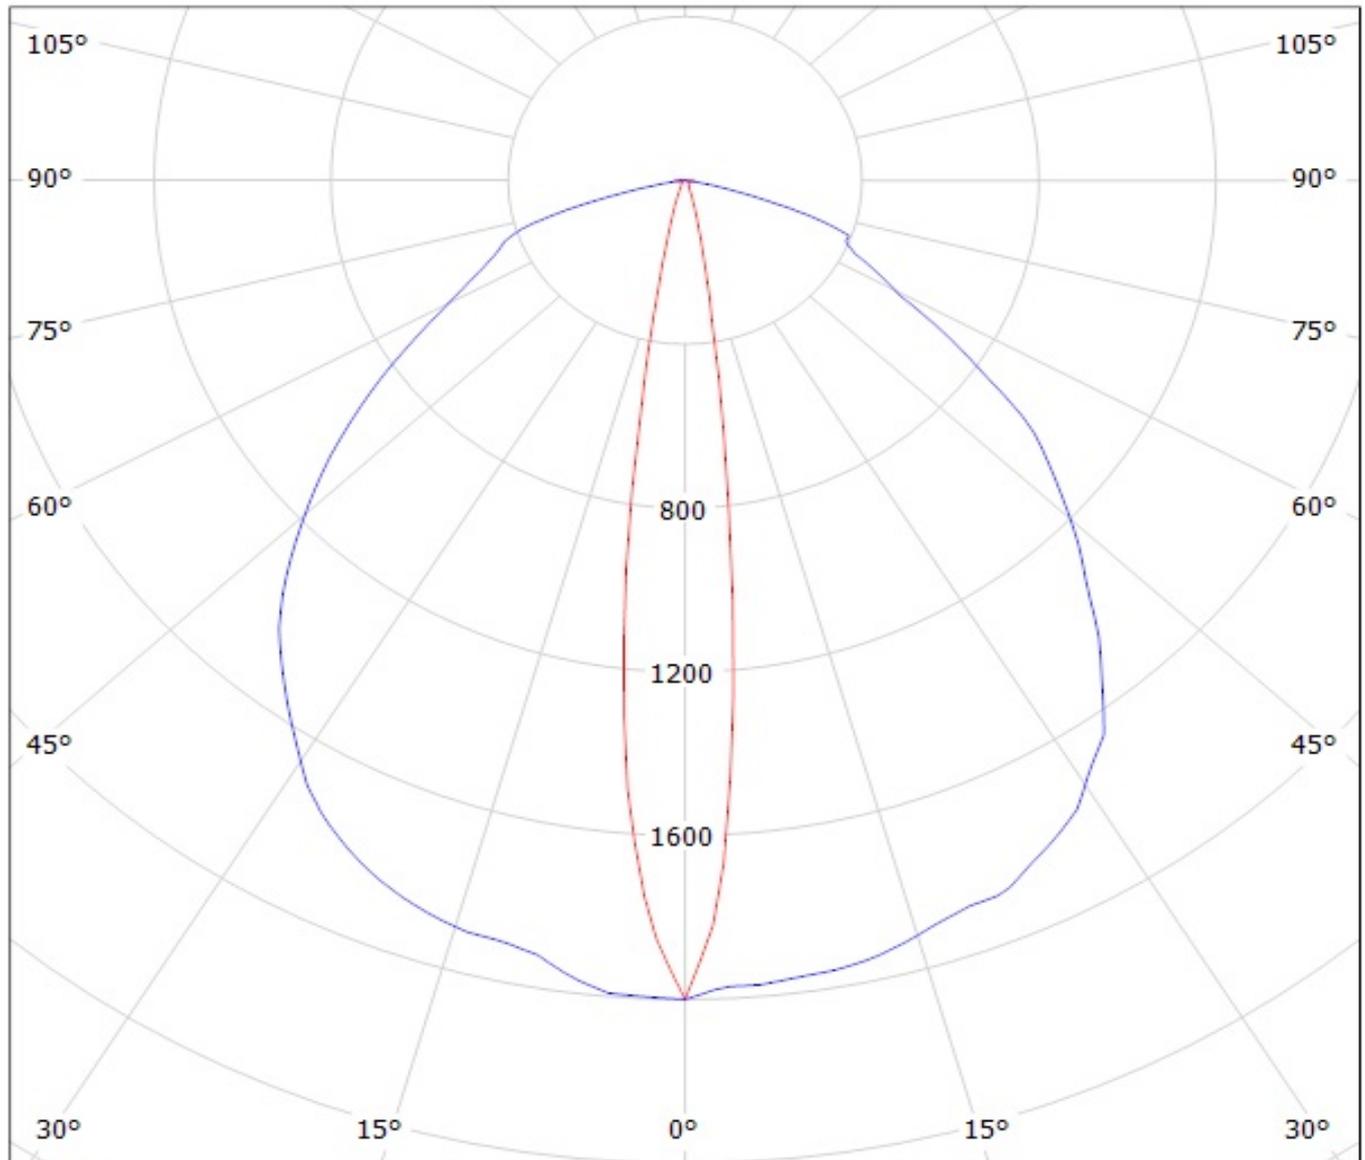


cd/klm

— C0 - C180

— C90 - C270

Luminaire: Ledil Oy C13012_FLARE-MAXI-D (Luxeon RE-ES 92lm @ 250mA) Efficiency=94%
Lamps: 1 x Luxeon RE-ES 92lm @ 250mA

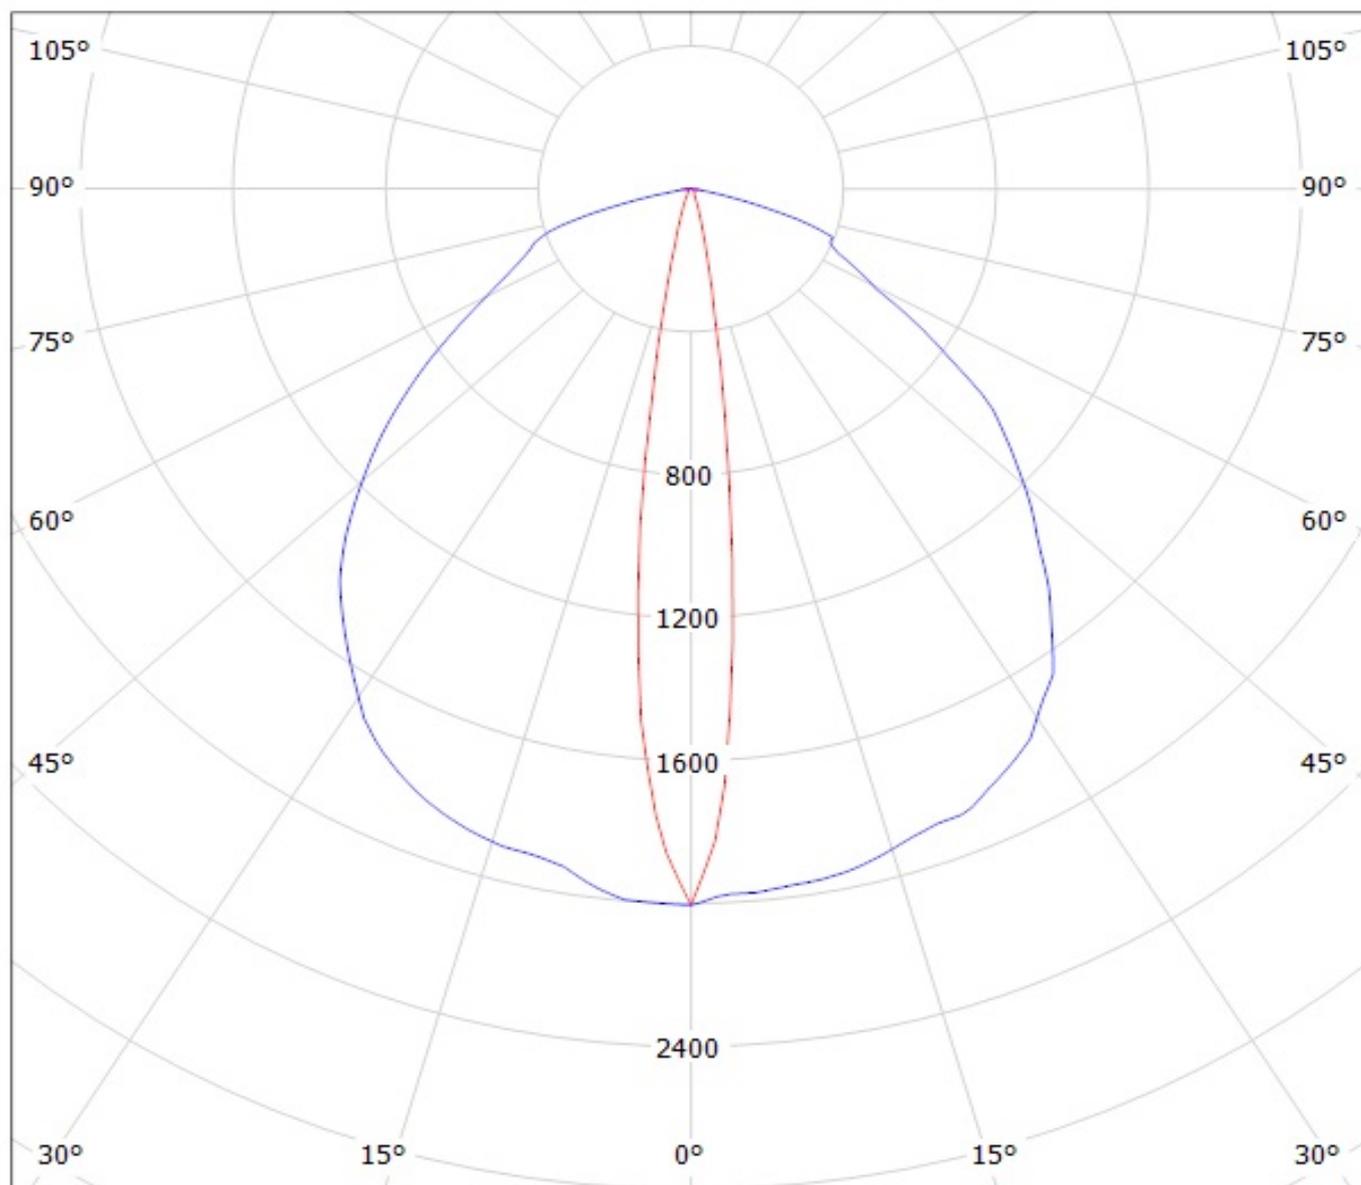


cd/klm

— C0 - C180

— C90 - C270

Luminaire: LEDiL Oy C13012 FLARE-MAXI-D_(CREE_XHP50_COOL_WHITE)

Lamps: 1 x CREE_XHP50_COOL_WHITE_242.068lm@250mA_CCT=COOLWHITE_I=02499mA_P=1.42958

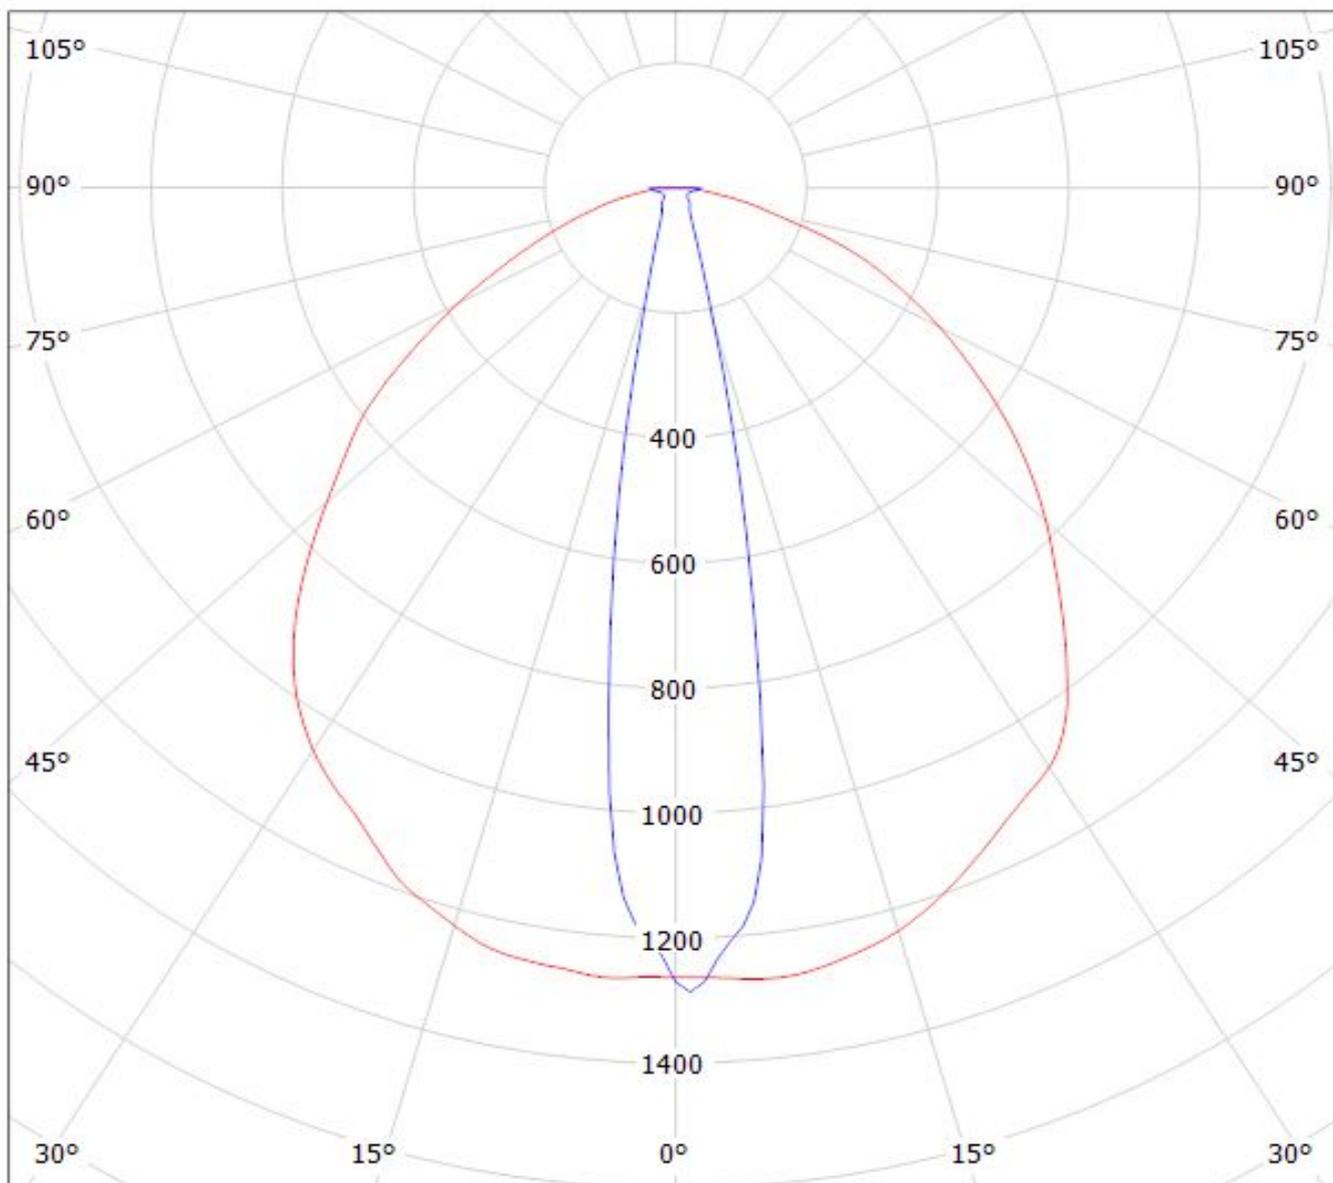


cd/klm

— C0 - C180


— C90 - C270

$\eta = 92\%$

Luminaire: EVERFINE C13012_FLARE-MAXI-D_(CREE_XHP70)
Lamps: 1 x CREE_XHP70_288.639lm@250mA_P=2.69892W_I=0.2499A

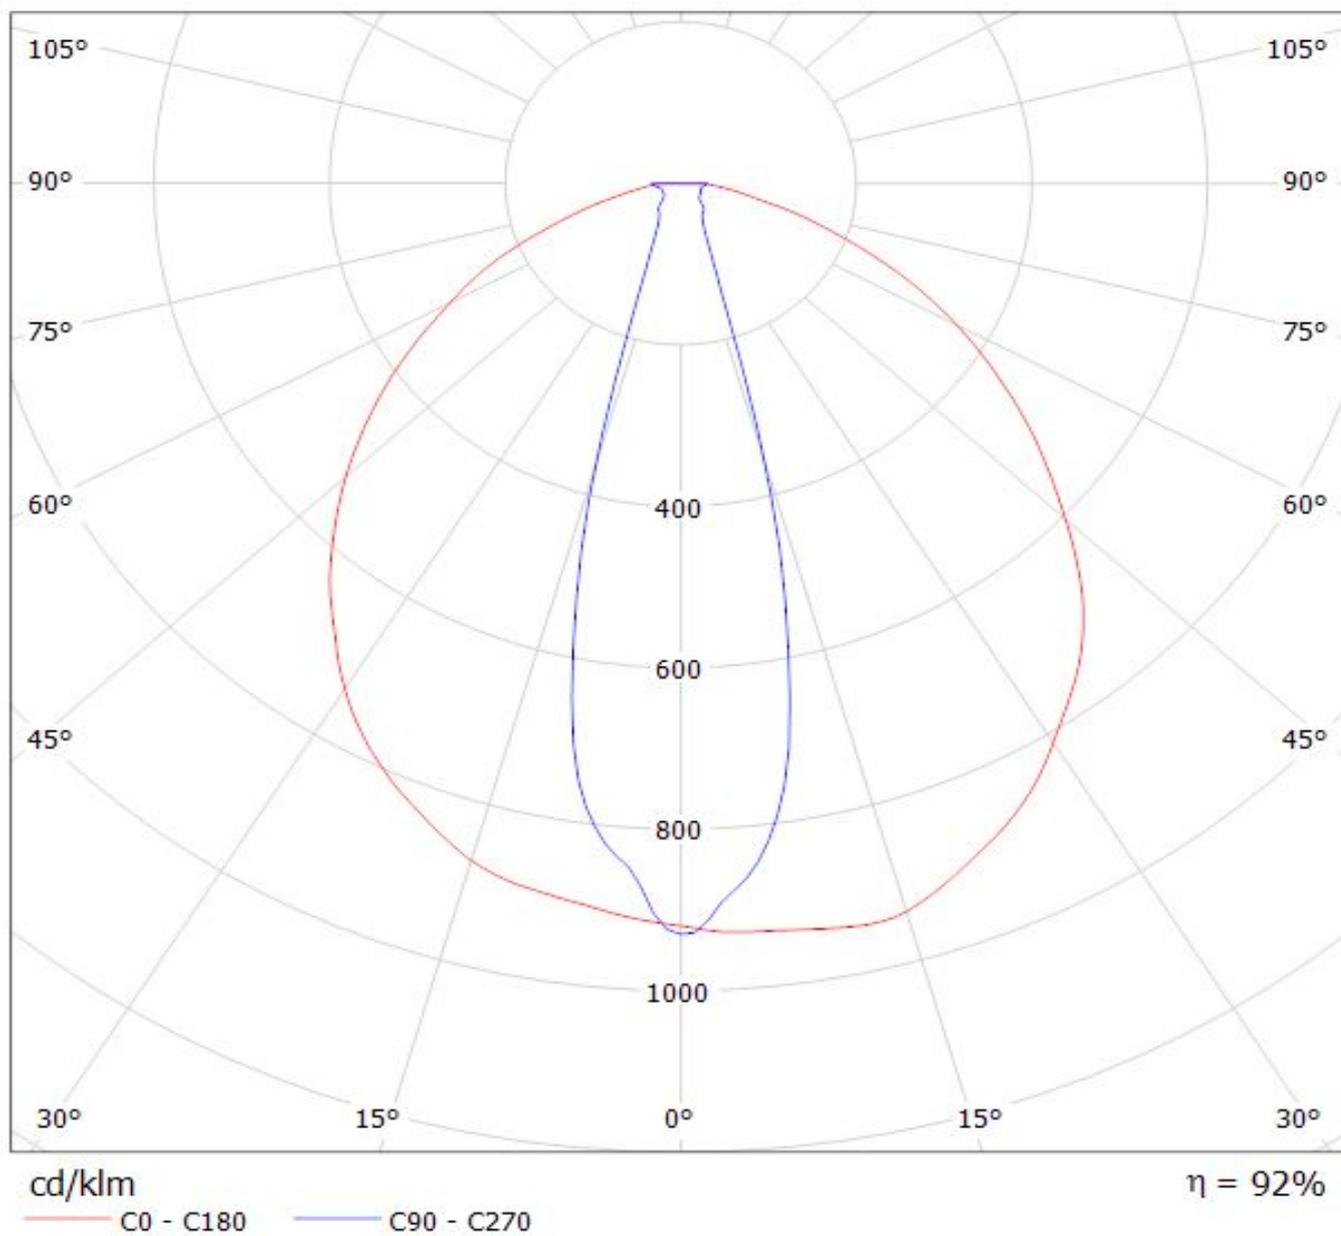


Luminaire: Ledil Oy C13012_FLARE-MAXI-D (Cree XP-G2 98lm @ 250mA) Efficiency=94%
Lamps: 1 x Cree XP-G2 98lm @ 250mA CCT=6596K P=0,75W I=250mA

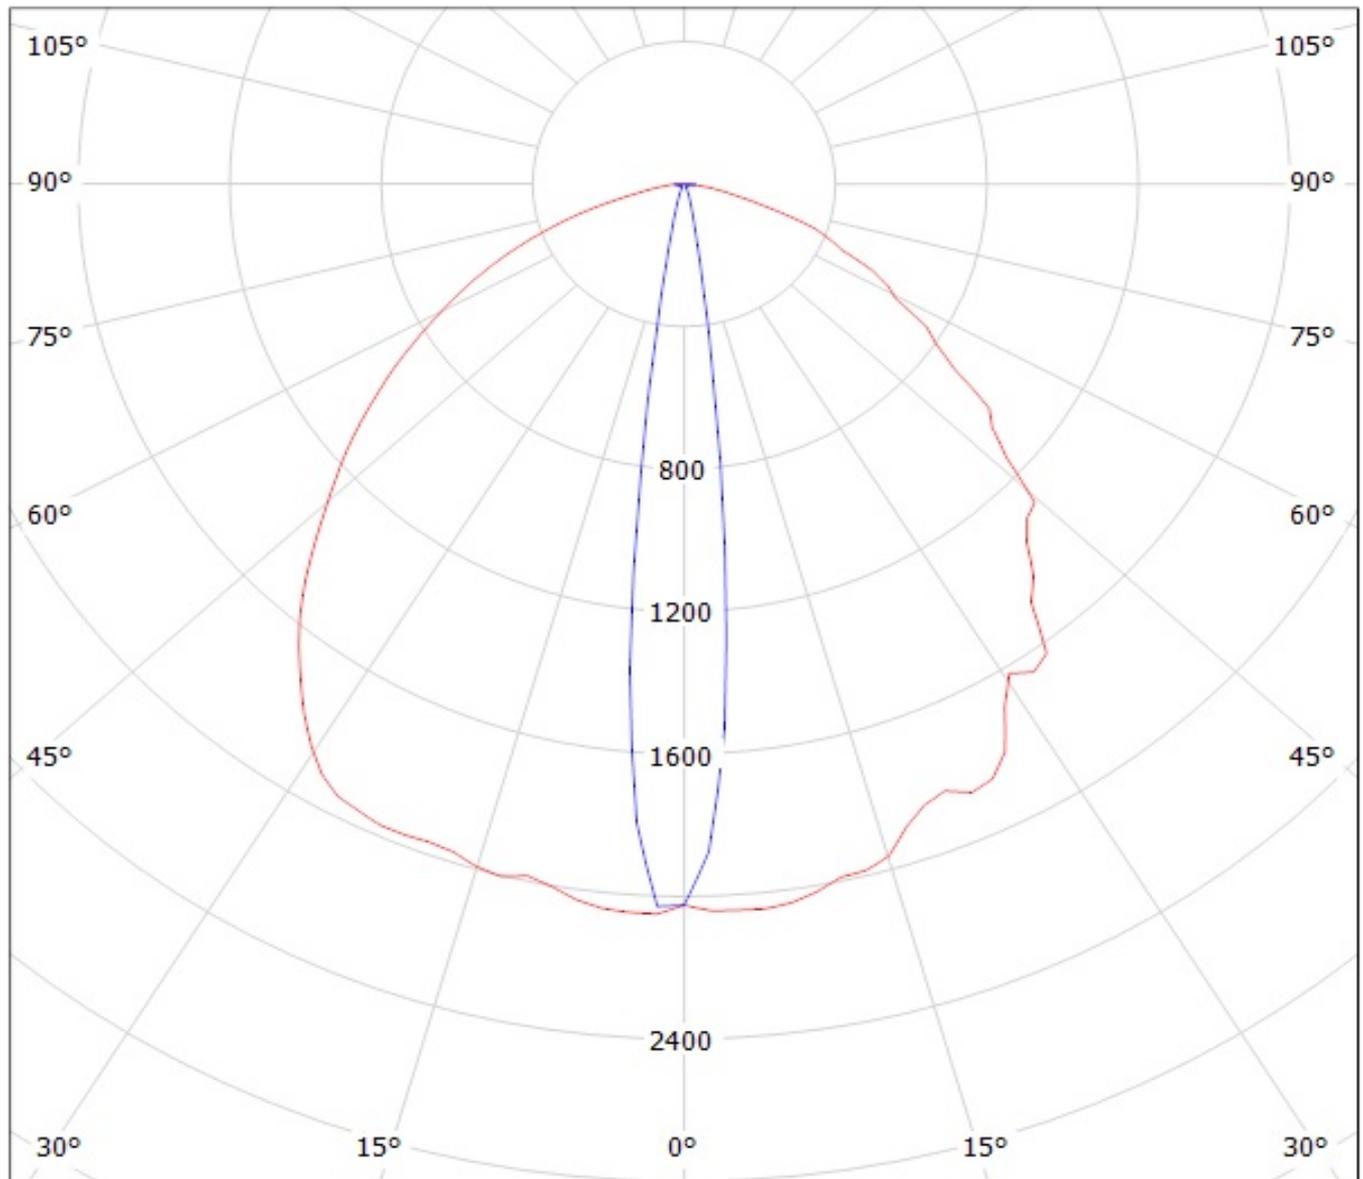

cd/klm


— C0 - C180 — C90 - C270

Luminaire: Ledil Oy C13012_FLARE-MAXI-D_(NCSxx19B) Efficiency=94%
Lamps: 1 x Nichia NSCxx19B (NCSL119BE) 88lm @ 250mA CCT=3000K P=0.8W I=250mA

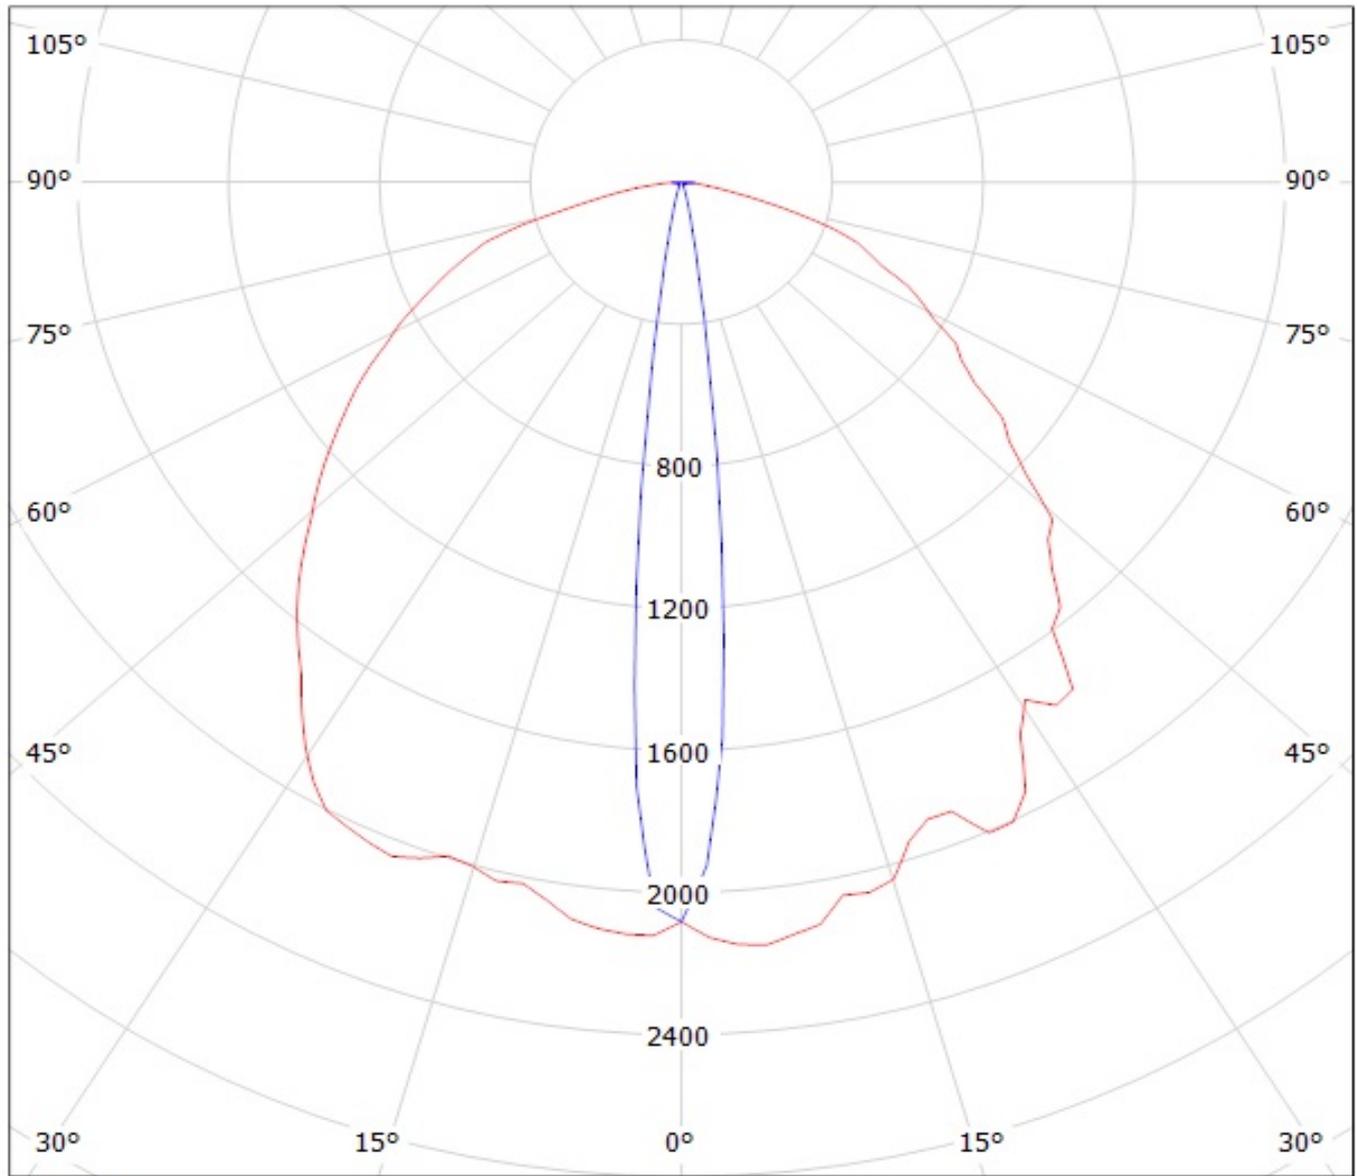

cd/klm
— C0 - C180 — C90 - C270

Luminaire: Ledil Oy C13012_FLARE-MAXI-D (Cree XM-L 97lm @ 250mA) Efficiency=94%
Lamps: 1 x Cree XM-L 97lm @ 250mA

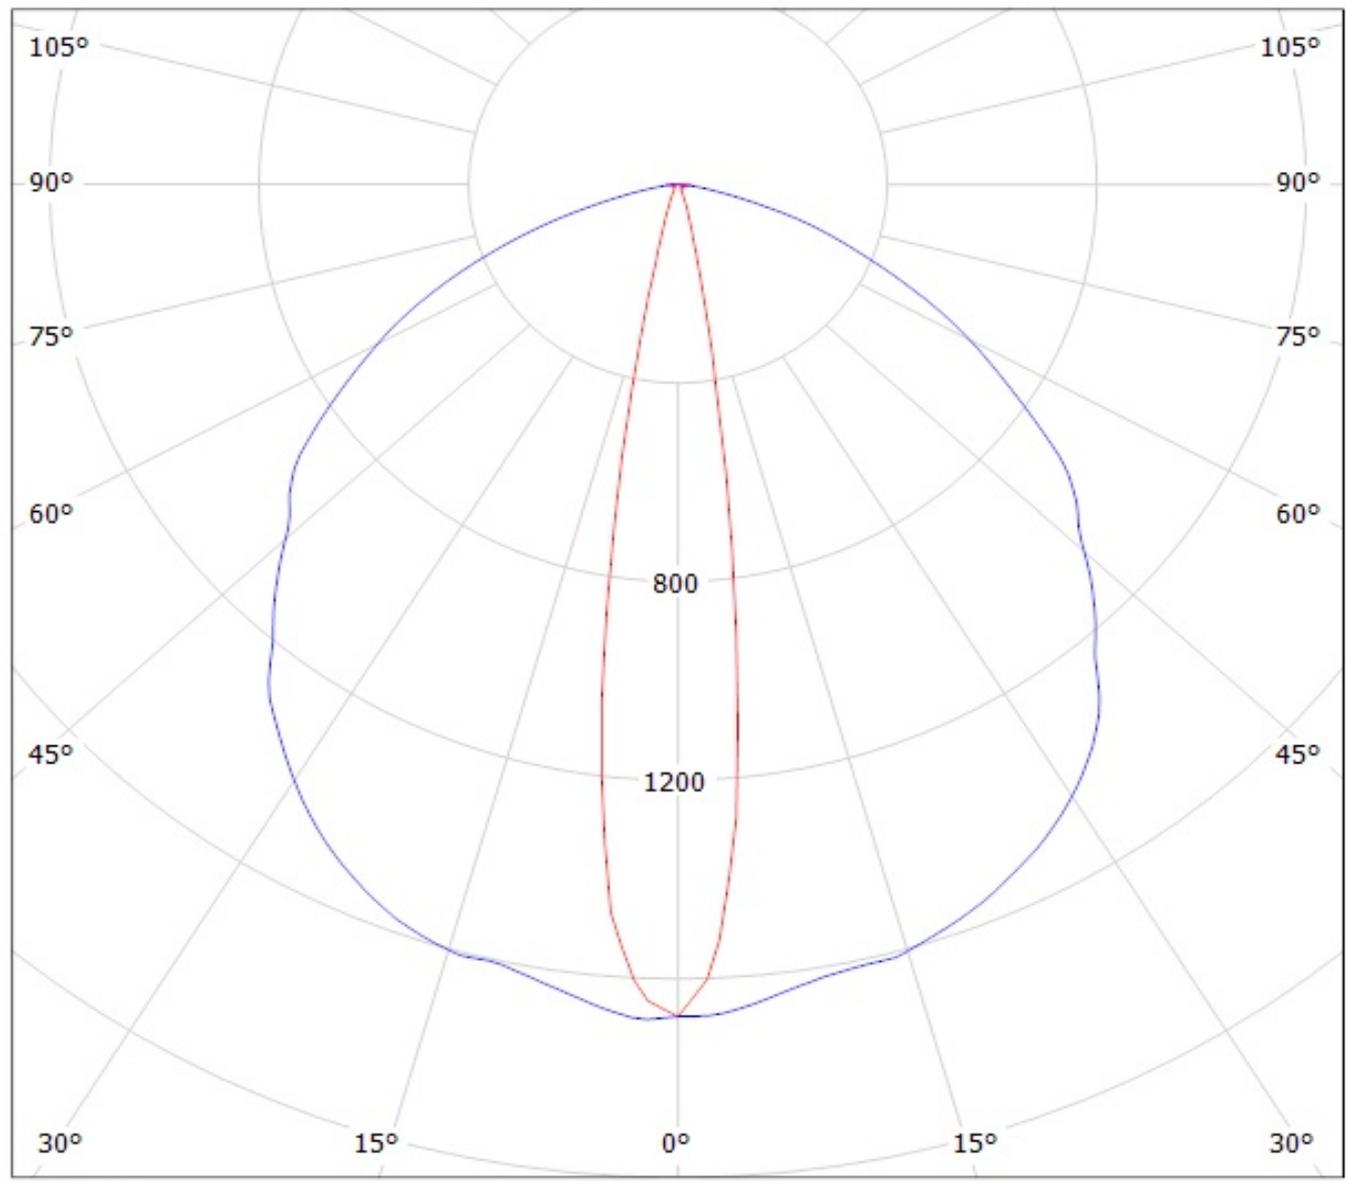


cd/klm


— C0 - C180

— C90 - C270

Luminaire: LEDiL Oy C13012_FLARE-MAXI-D Eff.93.2%
Lamps: 1 x Nichia NS9x383(107.656lm@250mA)

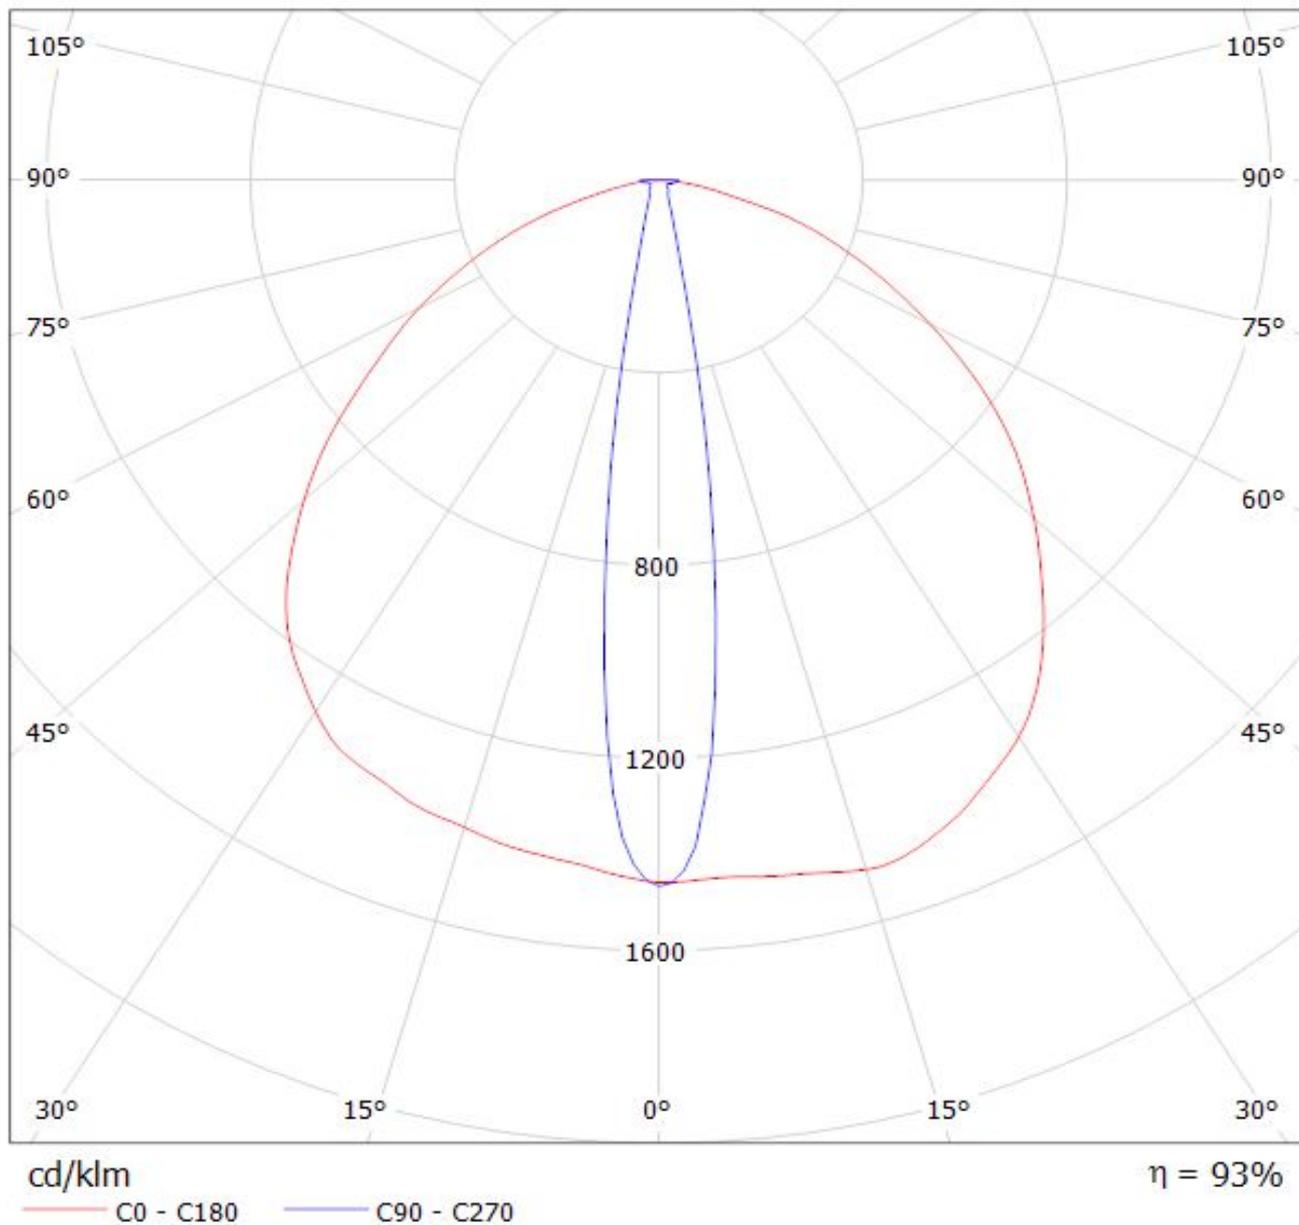

Luminaire: Ledil Oy C13012_FLARE-MAXI-D (Cree XP-G 70lm @ 250mA) Efficiency=94%
Lamps: 1 x Cree XP-G 70lm @ 250mA

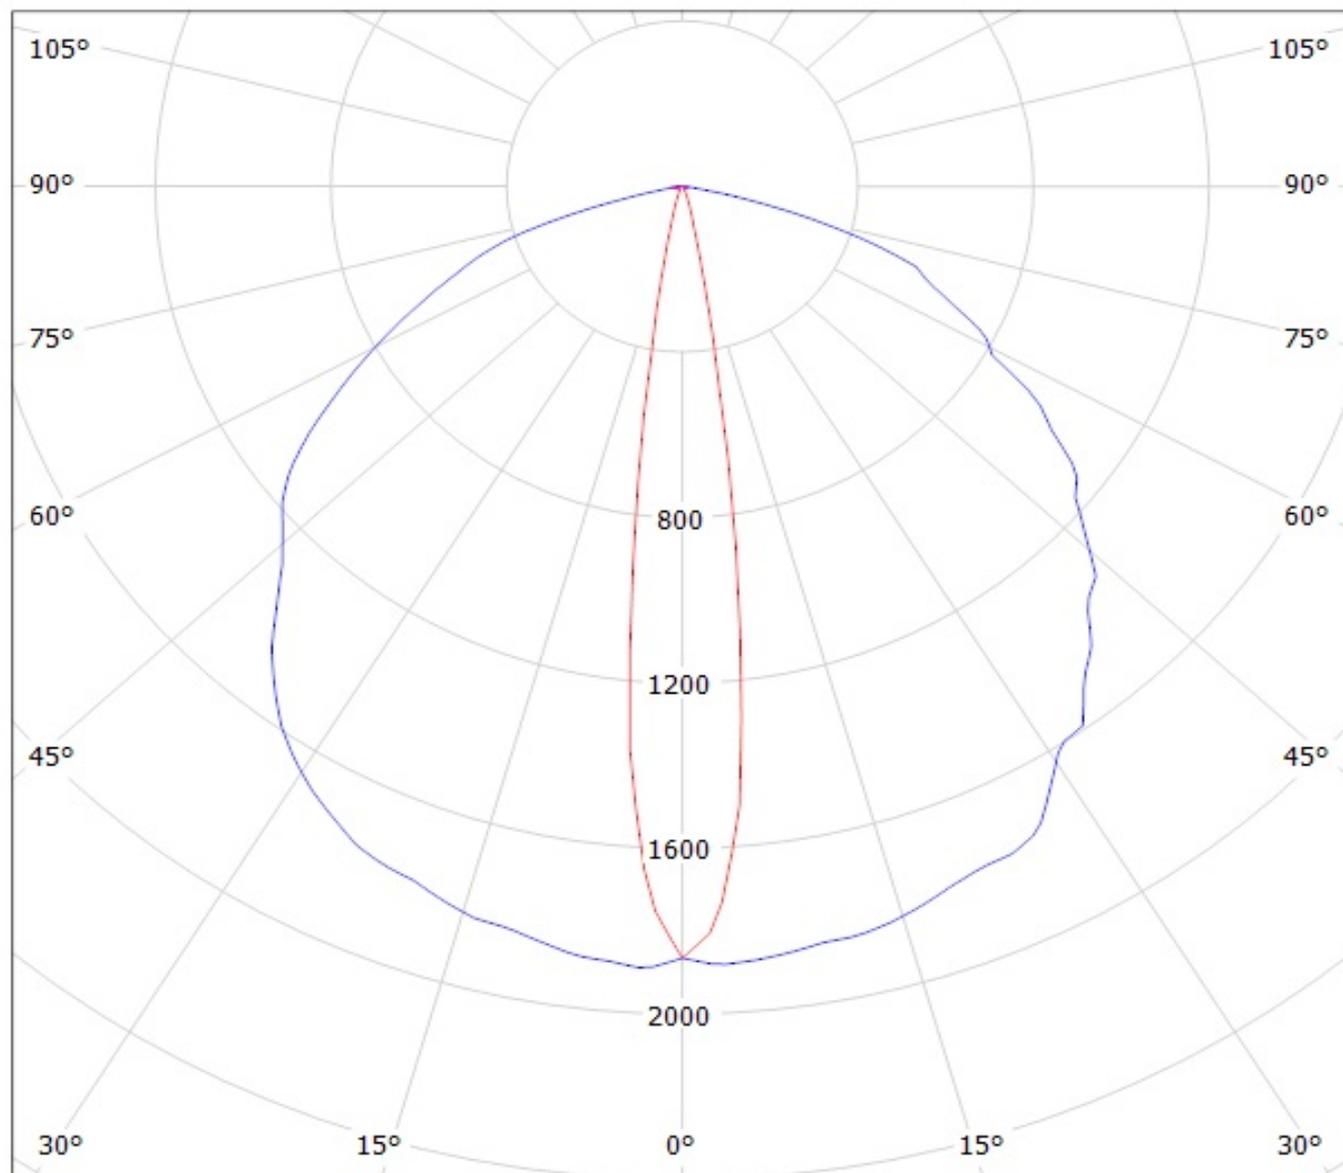


cd/klm

— C0 - C180

— C90 - C270

Luminaire: Ledil Oy C13012_FLARE-MAXI-D (Nichia 219B 103lm @ 250mA) Efficiency=94%
Lamps: 1 x Nichia 219B 103lm @ 250mA

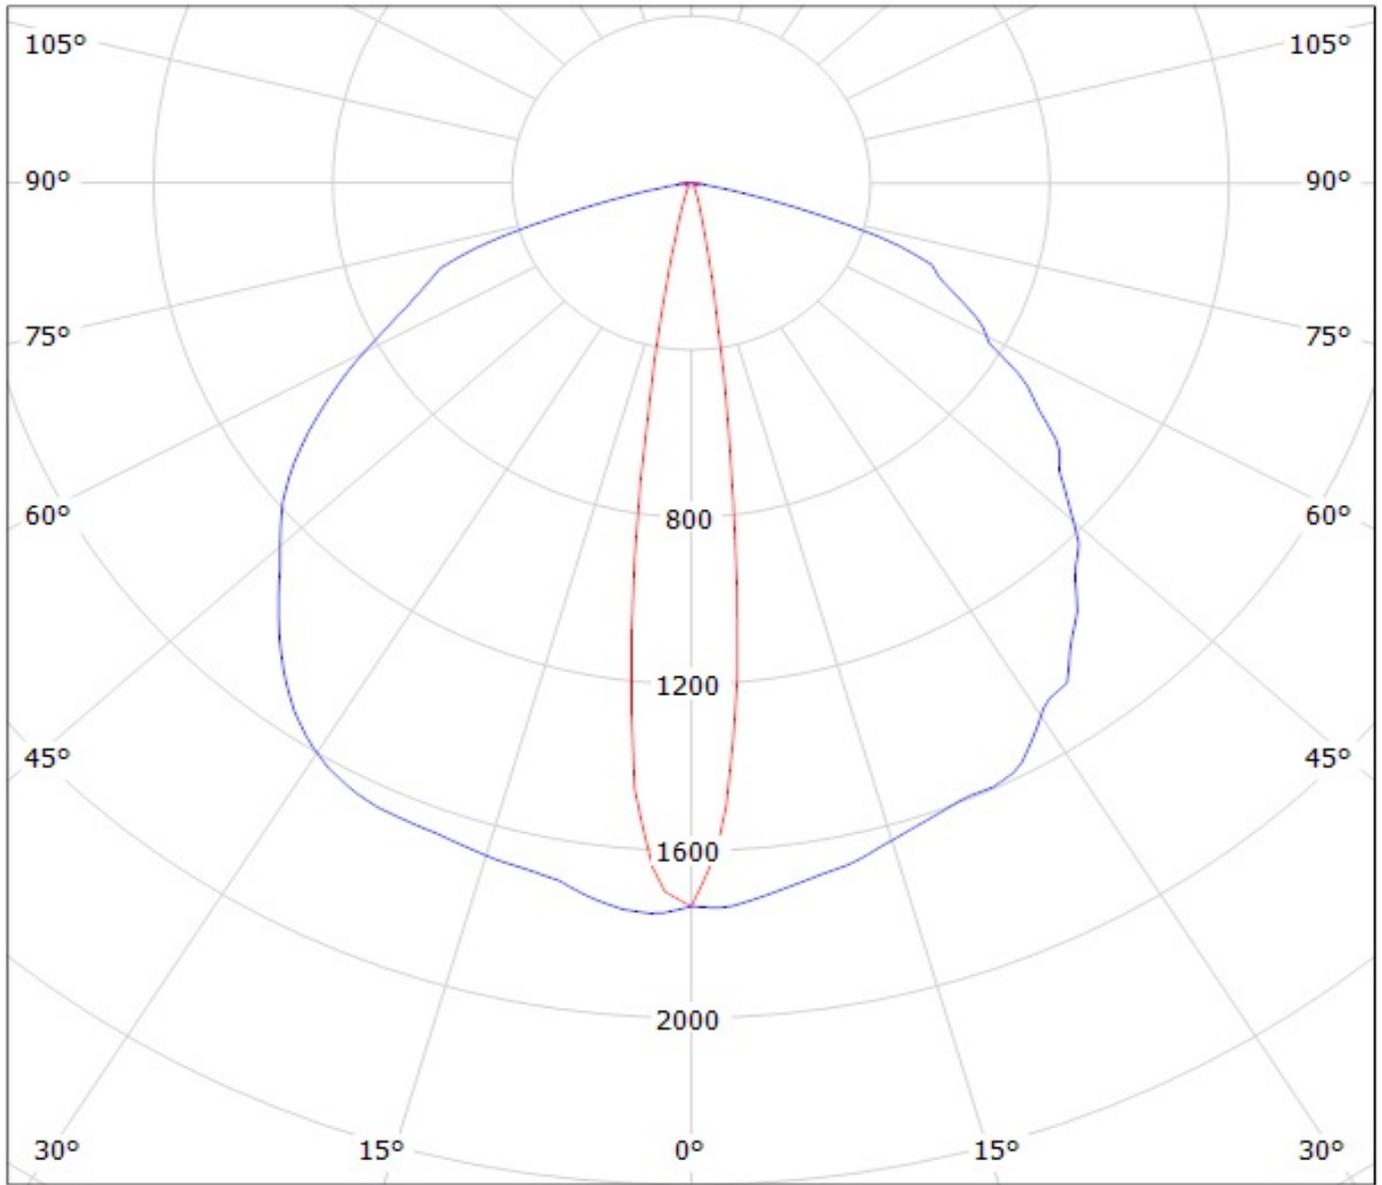


cd/klm

— C0 - C180

— C90 - C270

Luminaire: Ledil Oy C13012_FLARE-MAXI-D (Cree XT-E 98lm @ 250mA) Efficiency=94%
Lamps: 1 x Cree XT-E 98lm @ 250mA

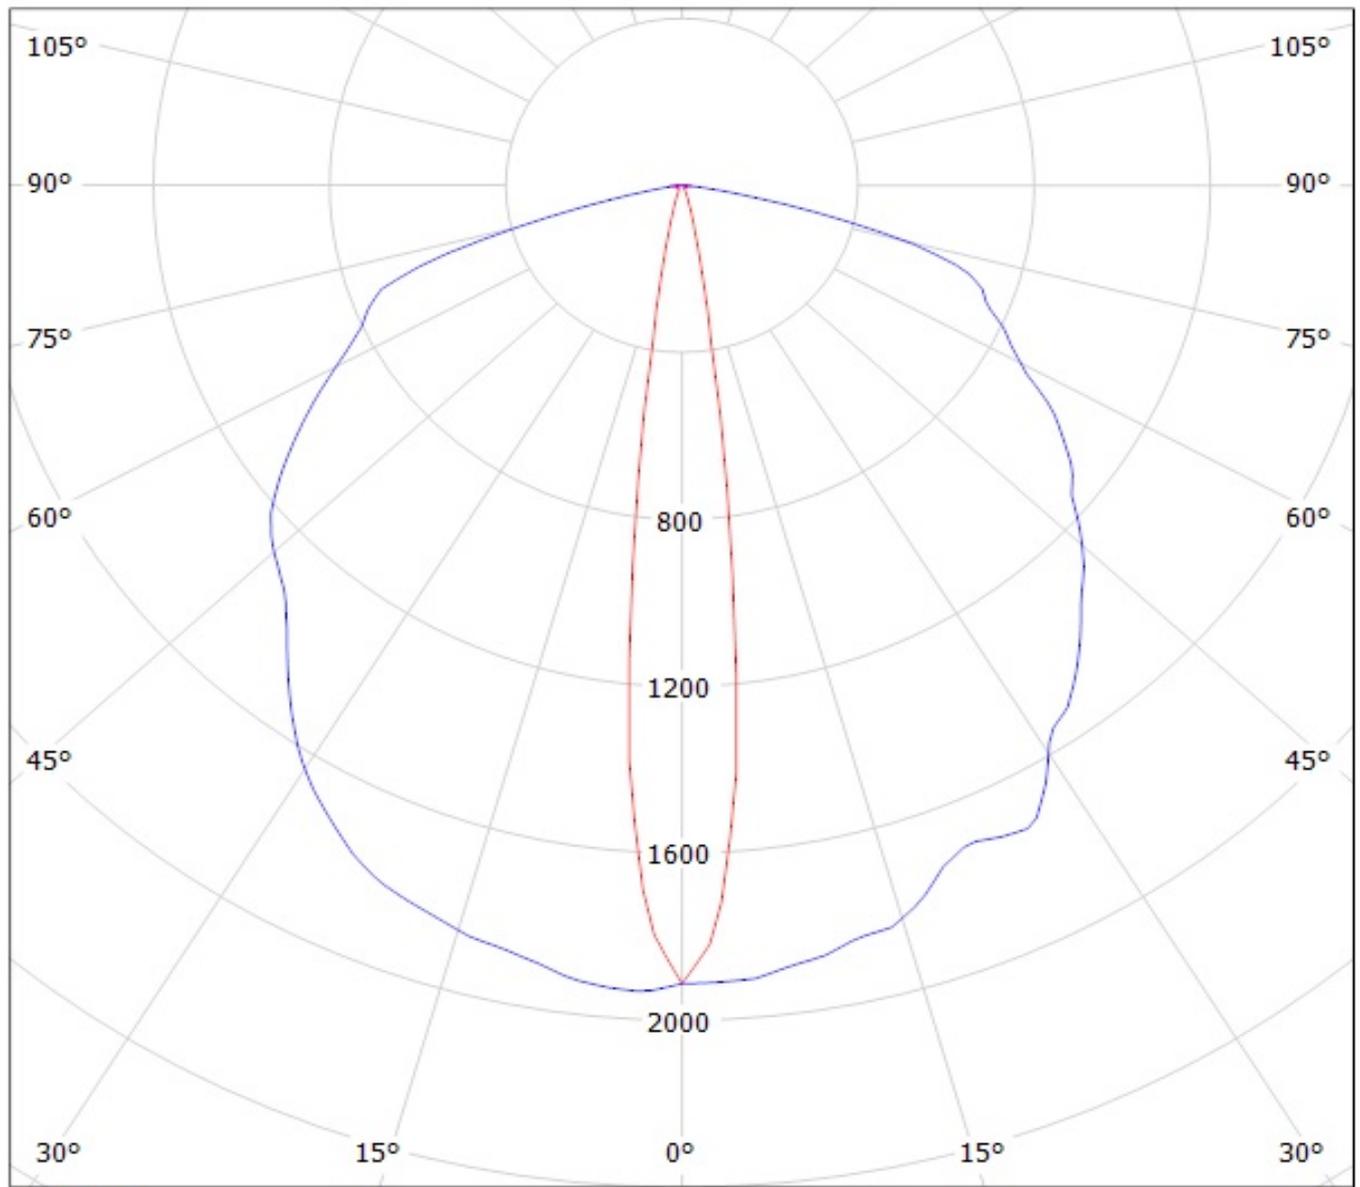


cd/klm


— C0 - C180

— C90 - C270

Luminaire: LEDiL Oy C13012_FLARE-MAXI-D_(XP-L)
Lamps: 1 x Cree_XP-L_130lm@250mA_P=0.73723W_I=249.9mA

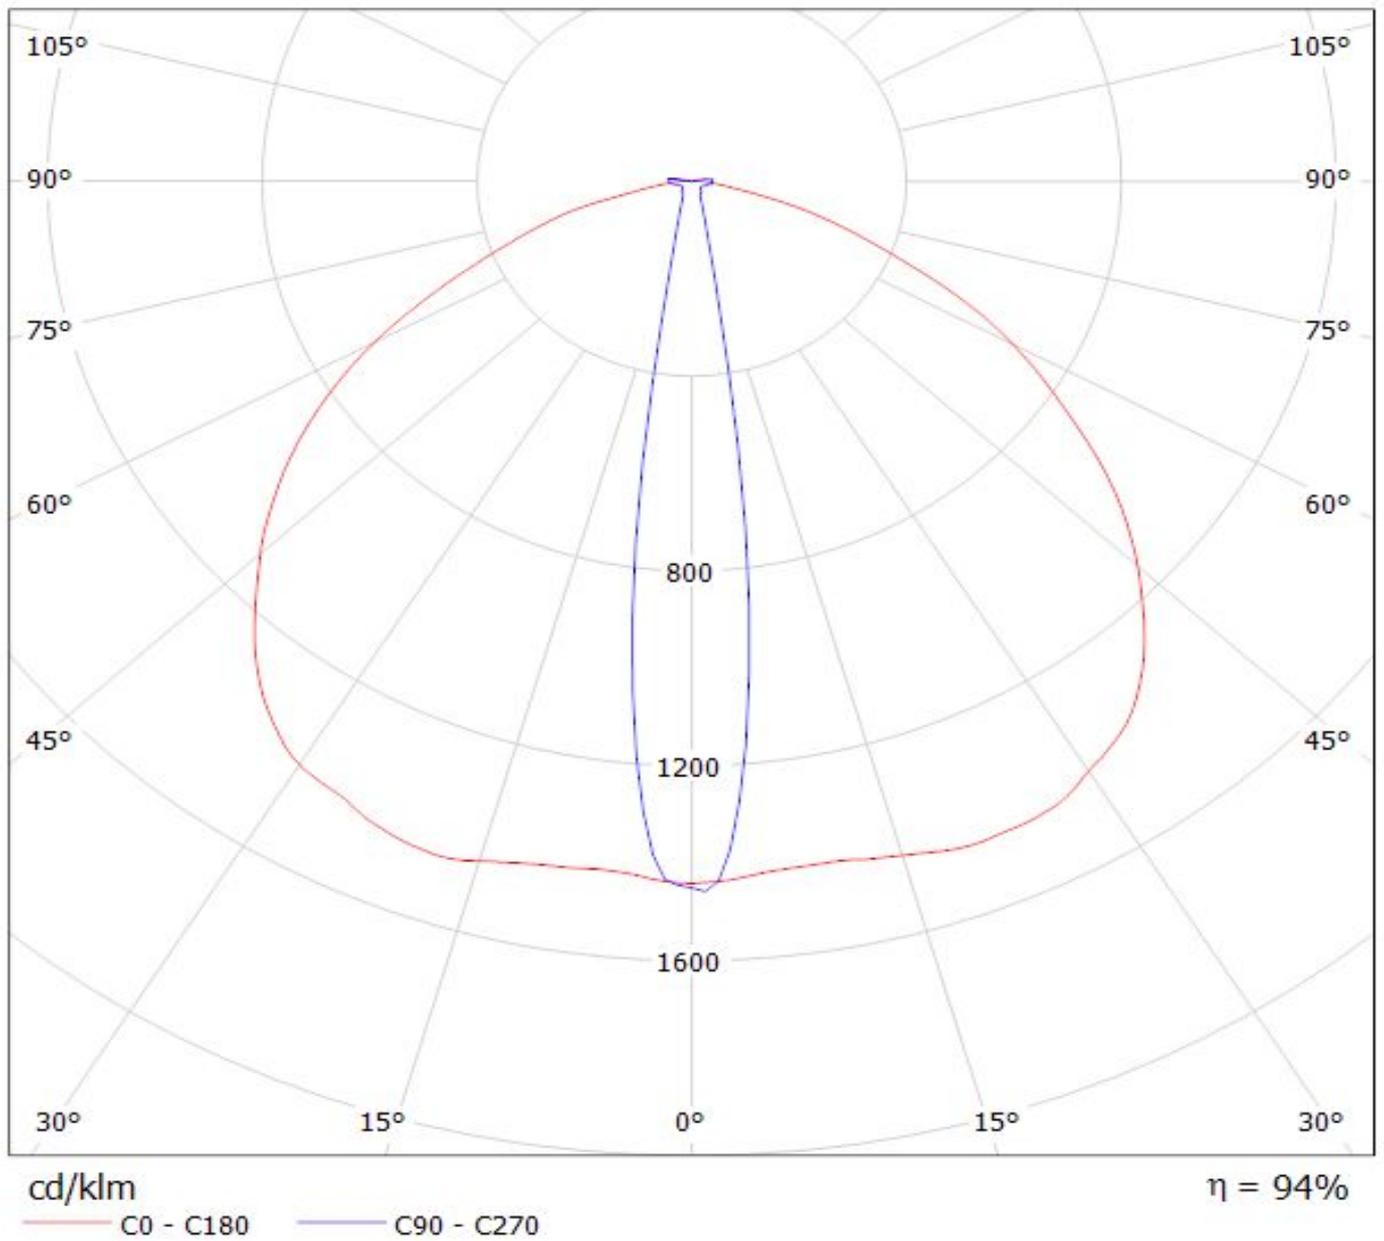

Luminaire: LEDil Oy C13012_FLARE-MAXI-D_(Oslon_SSL_150)
Lamps: 1 x Osram Oslon SSL 150 (78.52lm @ 250mA) P=0.7W I=250mA

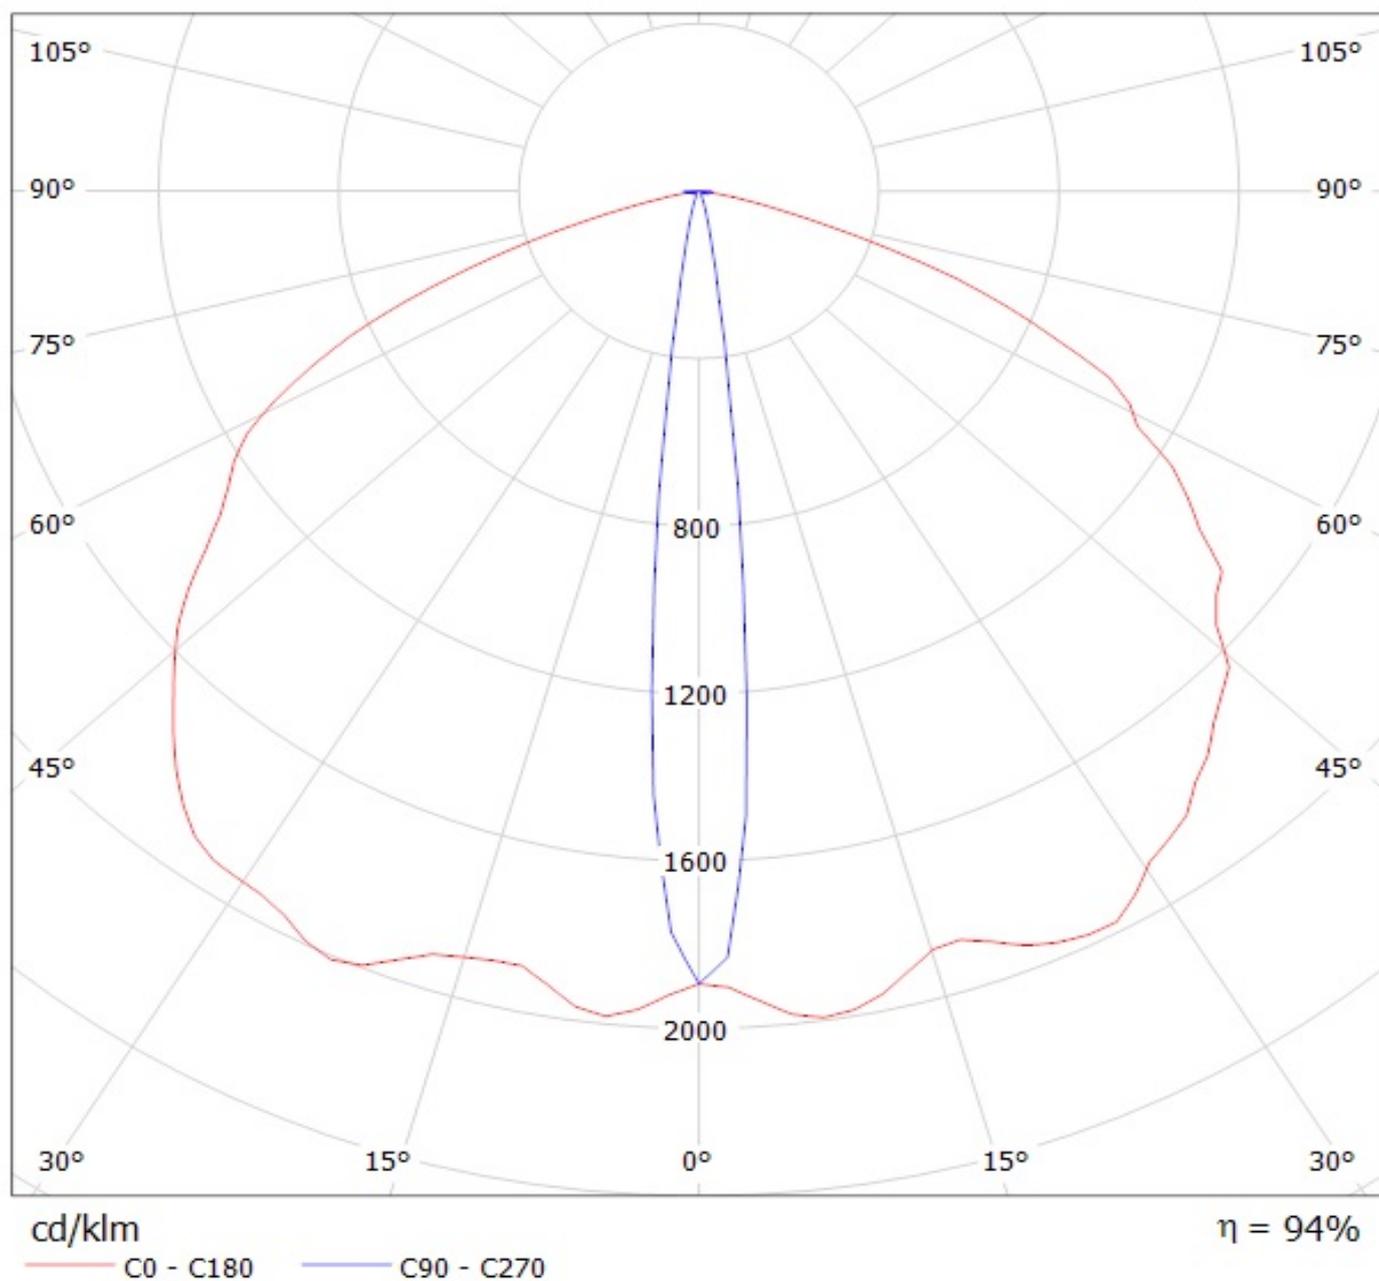

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.



Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331