

SERIES: VSK-S10-T | DESCRIPTION: AC-DC POWER SUPPLY


FEATURES

- up to 10 W continuous output
- encapsulated compact case
- universal input (85~264 Vac)
- single regulated output from 3.3~24 V
- over voltage, short circuit, and short circuit protection
- CE, UL safety approval
- efficiency up to 80%



MODEL	output voltage	output current max	output power max	ripple and noise typ	efficiency max
	(Vdc)	(A)	(W)	(mVp-p)	(%)
VSK-S10-3R3UA-T	3.3	2	6.6	50	70
VSK-S10-5UA-T	5	2	10	50	74
VSK-S10-9UA-T	9	1.1	10	50	76
VSK-S10-12UA-T	12	0.9	10.8	50	76
VSK-S10-15UA-T	15	0.7	10.5	50	78
VSK-S10-24UA-T	24	0.45	10.8	50	80

PART NUMBER KEY

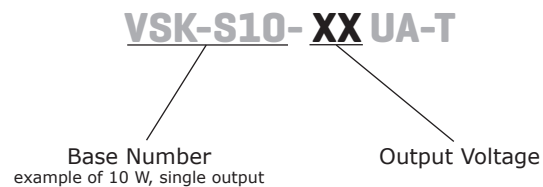

INPUT

parameter	conditions/description	min	typ	max	units
voltage		85 120		264 370	Vac Vdc
frequency		47		440	Hz
current	at 110 Vac at 230 Vac		230 150		mA mA
inrush current	at 110 Vac at 230 Vac		10 20		A A
input fuse	2 A / 250 V, slow-blow type (internally included)				

OUTPUT

parameter	conditions/description	min	typ	max	units
line regulation			±0.5		%
load regulation	at 10~100% load		±1		%
voltage set accuracy	3.3 V model all other models		±3 ±2		% %
hold-up time	at 230 Vac		50		ms
switching frequency			60		kHz
temperature coefficient			0.02		%/°C

PROTECTIONS

parameter	conditions/description	min	typ	max	units
over current protection		110			%
short circuit protection	shutdown and auto restart				


SAFETY & COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	for 1 minute	4,000			Vac
safety approvals	UL 60950				
safety class	Class II				
conducted emissions	CISPR22/EN55022 Class A, Class B (external circuit required, see figure 1)				
radiated emissions	CISPR22/EN55022 Class A, Class B (external circuit required, see figure 1)				
ESD	IEC/EN61000-4-2 Class B, contact ±6 kV / air ±8 kV				
radiated immunity	IEC/EN61000-4-3 Class A, 10V/m				
EFT/burst	IEC/EN61000-4-4 Class B, ±2 kV				
	IEC/EN61000-4-4 Class B, ±4 kV (external circuit required, see figure 1)				
surge	IEC/EN61000-4-5 Class B, ±1 kV				
	IEC/EN61000-4-5 Class B, ±2 kV / ±4 kV (external circuit required, see figure 1)				
conducted immunity	IEC/EN61000-4-6 Class A, 10 Vr.m.s				
PFM	IEC/EN61000-4-8 Class A, 10 A/m				
voltage dips & interruptions	IEC/EN61000-4-11 Class B, 0%-70%				
leakage current	at 230 Vac		0.1		mA
MTBF	at 25°C, max. load	300,000			hours
RoHS compliant	yes				

ENVIRONMENTAL

parameter	conditions/description	min	typ	max	units
operating temperature	see derating curves	-25		70	°C
storage temperature		-40		105	°C
case temperature				95	°C
humidity	non-condensing			95	%

DERATING CURVES

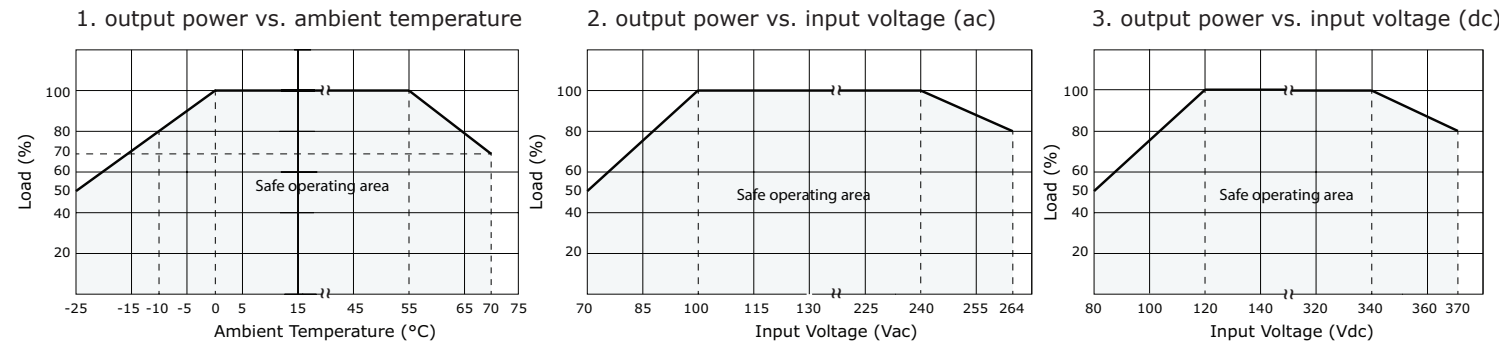


MECHANICAL

parameter	conditions/description	min	typ	max	units
dimensions	76 x 31.5 x 27.8 (2.992 x 1.240 x 1.094 inch)				mm
material	UL94V-0				
weight			70		g


MECHANICAL DRAWING

units: mm [inches]
tolerance: ±0.50 [±0.020]

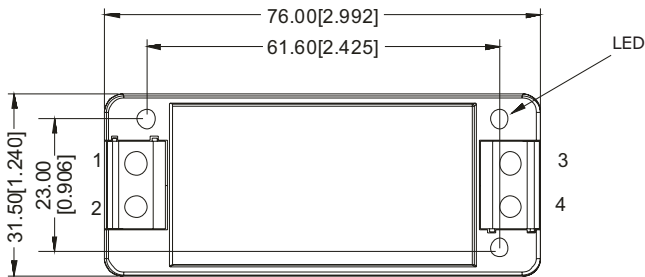


Top View

PIN CONNECTIONS	
PIN	FUNCTION
1	AC(N)
2	AC(L)
3	+Vo
4	-Vo

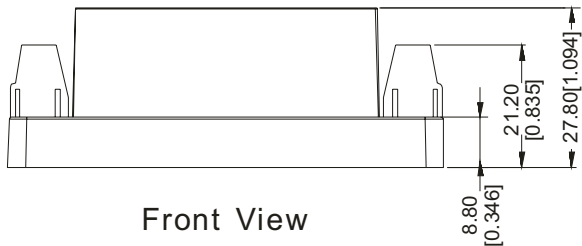

Front View

TYPICAL APPLICATION CIRCUIT

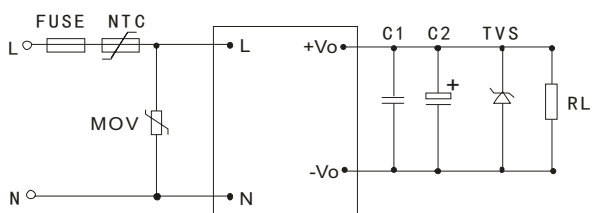

External Capacitors Typical Value (Unit: μF)			
MODEL	C1	C2	TVS
VSK-S10-3R3UA-T	1 μF / 50V	220 μF / 10V	SMBJ7.0A
VSK-S10-5UA-T	1 μF / 50V	220 μF / 10V	SMBJ7.0A
VSK-S10-9UA-T	1 μF / 50V	120 μF / 25V	SMBJ12A
VSK-S10-12UA-T	1 μF / 50V	120 μF / 25V	SMBJ20A
VSK-S10-15UA-T	1 μF / 50V	120 μF / 25V	SMBJ20A
VSK-S10-24UA-T	1 μF / 50V	68 μF / 35V	SMBJ30A

- Notes:
- Output filtering capacitor C2 is an electrolytic capacitor. It is recommended to use high frequency and low impedance electrolytic capacitors. For capacitance and current of capacitor please refer to the manufacturer's datasheet. Voltage derating of capacitor should be 80% or above. C1 is a ceramic capacitor that is used to filter high frequency noise. TVS is a recommended component to protect post-circuits (if converter fails). External input NTC model is recommended to use 5D-9
 - The fuse is internally included, it does not need to be added to the circuit.

EMC RECOMMENDED CIRCUIT


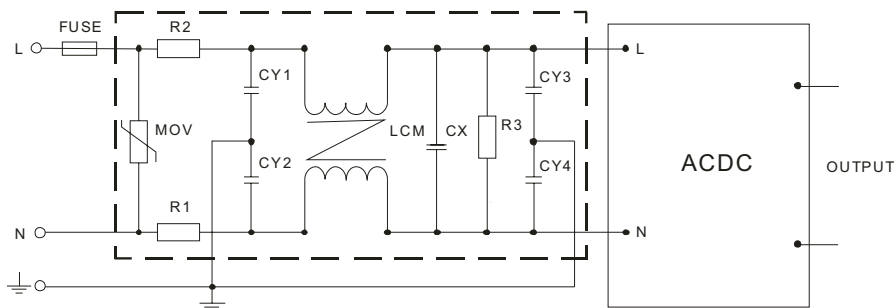


Figure 1

Recommended external circuit components	
MOV	561KD14
R1, R2	2 Ω /3W winding resistor
R3	1M Ω /2W
CY1, CY2, CY3, CY4	1000pF/400Vac
CX	0.22 μF /275Vac
LCM	10mH-30mH

TEST CONFIGURATION

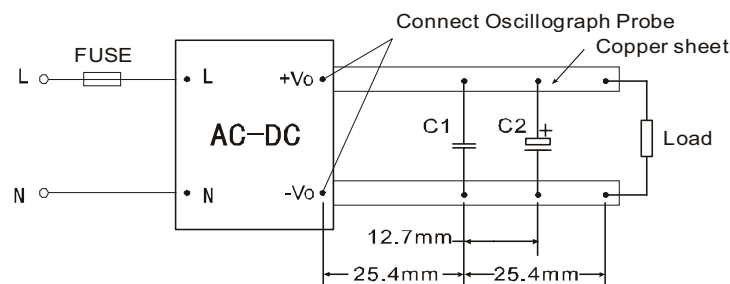

Capacitors	
C1	1 μF ceramic capacitor
C2	10 μF electrolytic capacitor

- Notes:
- All specifications measured at $T_a=25^\circ\text{C}$, humidity <75%, 220 Vac input voltage, and rated output load, unless otherwise specified.

REVISION HISTORY

rev.	description	date
1.0	initial release	09/06/2012
1.01	updated mechanical drawing and product photo	11/28/2012
1.02	updated spec	03/08/2013

The revision history provided is for informational purposes only and is believed to be accurate.

**CUI INC[®]**

Headquarters
20050 SW 112th Ave.
Tualatin, OR 97062
800.275.4899

Fax 503.612.2383
cui.com
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331