


6-pin type for switching low-level analog signal

PhotoMOS[®] GU 1 Form A (AQV210, AQV214H)

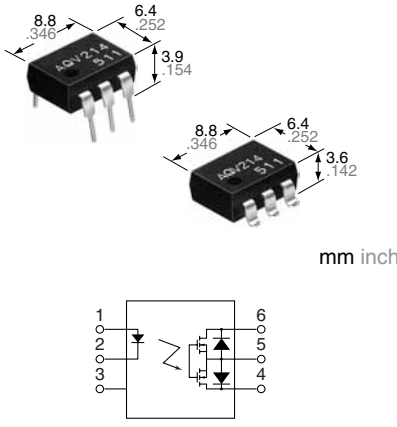

RoHS compliant

FEATURES

- 1. Controls low-level analog signals**
PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.
- 2. Controls various types of loads such as relays, motors, lamps and solenoids**
- 3. Optical coupling for extremely high isolation**
Unlike mechanical relays, the PhotoMOS combines LED and optoelectronic device to transfer signals using light for extremely high isolation.
- 4. Eliminates the need for a counter electromotive force protection diode in the drive circuits on the input side**
- 5. Stable on-resistance**

- 6. Low-level off state leakage current of max. 1 μ A**
- 7. Reinforced insulation type of I/O voltage 5,000V also available**

TYPICAL APPLICATIONS

- High-speed inspection machines
- Telephone equipment
- Data communication equipment
- Computers

TYPES

	I/O isolation	Output rating*		Package	Part No.				Packing quantity		
					Through hole terminal	Surface-mount terminal			Tube	Tape and reel	
						Tube packing style		Tape and reel packing style			
		Load voltage	Load current			Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side				
AC/DC dual use	Standard 1,500 V AC	60 V	550 mA	DIP6-pin	AQV212	AQV212A	AQV212AX	AQV212AZ	1 tube contains 50 pcs. 1 batch contains 500 pcs.	1,000 pcs.	
		100 V	320 mA		AQV215	AQV215A	AQV215AX	AQV215AZ			
		200 V	180 mA		AQV217	AQV217A	AQV217AX	AQV217AZ			
		350 V	130 mA		AQV210	AQV210A	AQV210AX	AQV210AZ			
		400 V	120 mA		AQV214	AQV214A	AQV214AX	AQV214AZ			
		600 V	50 mA		AQV216	AQV216A	AQV216AX	AQV216AZ			
		400 V	120 mA		AQV214H	AQV214HA	AQV214HAX	AQV214HAZ			
	Reinforced 5,000 V	400 V	120 mA								

*Indicate the peak AC and DC values.
Note: The surface mount terminal shape indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item		Sym- bol	Type of connec- tion	AQV212(A)	AQV215(A)	AQV217(A)	AQV210(A)	AQV214(A)	AQV216(A)	AQV214H(A)	Remarks
Input	LED forward current	I _F		50 mA							
	LED reverse voltage	V _R		5 V							
	Peak forward current	I _{FP}		1 A							f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P _{in}		75 mW							
	Load voltage (peak AC)	V _L		60 V	100 V	200 V	350 V	400 V	600 V	400 V	
Output	Continuous load current	I _L	A	0.55 A	0.32 A	0.18 A	0.13 A	0.12 A	0.05 A	0.12 A	A connection: Peak AC, DC B, C connection: DC
			B	0.65 A	0.42 A	0.22 A	0.15 A	0.13 A	0.06 A	0.13 A	
			C	0.80 A	0.60 A	0.30 A	0.17 A	0.15 A	0.08 A	0.15 A	
	Peak load current	I _{peak}		1.2 A	0.96 A	0.54 A	0.4 A	0.3 A	0.15 A	0.3 A	A connection: 100 ms (1 shot), V _L =DC
Power dissipation	P _{out}		500 mW								
Total power dissipation	P _T		550 mW								
I/O isolation voltage	V _{iso}		1,500 V AC							5,000 V AC	
Temperature limits	Operating	T _{opr}	-40°C to +85°C -40°F to +185°F							Non-condensing at low temp.	
	Storage	T _{stg}	-40°C to +100°C -40°F to +212°F								

GU 1 Form A (AQV21○, AQV214H)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection**	AQV212(A)	AQV215(A)	AQV217(A)	AQV210(A)	AQV214(A)	AQV216(A)	AQV214H(A)	Condition	
Input	LED operate current	Typical	—	1 mA	1 mA	1 mA	1 mA	1 mA	1 mA	1.3 mA	I _L = Max.	
		Maximum		3 mA	3 mA	3 mA	3 mA	3 mA	3 mA	3 mA		
	LED turn off current	Minimum	—	0.4 mA	0.4 mA	0.4 mA	0.4 mA	0.4 mA	0.4 mA	0.4 mA	1.2 mA	I _L = Max.
Typical		0.79 mA		0.79 mA	0.79 mA	0.79 mA	0.79 mA	0.79 mA	0.79 mA	0.79 mA		
LED dropout voltage	Typical	V _F	—	1.25 V (1.14 V at I _F = 5 mA)							I _F = 50 mA	
	Maximum			1.5 V								
Output	On resistance	Typical	R _{on}	A	0.83 Ω	2.3 Ω	11.0 Ω	23 Ω	30 Ω	70 Ω	30 Ω	I _F = 5 mA I _L = Max. Within 1 s on time
		Maximum			2.5 Ω	4.0 Ω	15.0 Ω	35 Ω	50 Ω	120 Ω	50 Ω	
	On resistance	Typical	R _{on}	B	0.44 Ω	1.15 Ω	5.5 Ω	11.5 Ω	22.5 Ω	55 Ω	22.5 Ω	I _F = 5 mA I _L = Max. Within 1 s on time
		Maximum			1.25 Ω	2.0 Ω	7.5 Ω	17.5 Ω	25 Ω	100 Ω	25 Ω	
	On resistance	Typical	R _{on}	C	0.25 Ω	0.6 Ω	2.8 Ω	6.0 Ω	11.3 Ω	28 Ω	11.3 Ω	I _F = 5 mA I _L = Max. Within 1 s on time
		Maximum			0.63 Ω	1.0 Ω	3.8 Ω	8.8 Ω	12.5 Ω	50 Ω	12.5 Ω	
Output capacitance	Typical	C _{out}	A	150 pF	110 pF	70 pF	45 pF	45 pF	45 pF	45 pF	I _F = 0 mA V _B = 0 V f = 1 MHz	
Off state leakage current	Maximum	I _{Leak}	—	1 μA							I _F = 0 mA V _L = Max.	
Turn on time*	Typical	T _{on}	—	0.65 ms	0.6 ms	0.25 ms	0.25 ms	0.21 ms	0.28 ms	0.6 ms	I _F = 5 mA** I _L = Max.	
	Maximum			2 ms	2 ms	1.0 ms	0.5 ms	0.5 ms	0.5 ms	0.8 ms		
Turn off time*	Typical	T _{off}	—	0.08 ms	0.06 ms	0.05 ms	0.05 ms	0.05 ms	0.04 ms	0.05 ms	I _F = 5 mA I _L = Max.	
	Maximum			0.2 ms	0.2 ms	0.2 ms	0.2 ms	0.2 ms	0.2 ms	0.2 ms		
I/O capacitance	Typical	C _{iso}	—	0.8 pF							f = 1 MHz V _B = 0 V	
	Maximum			1.5 pF								
Initial I/O isolation resistance	Minimum	R _{iso}	—	1,000 MΩ							500 V DC	

*Turn on/Turn off time

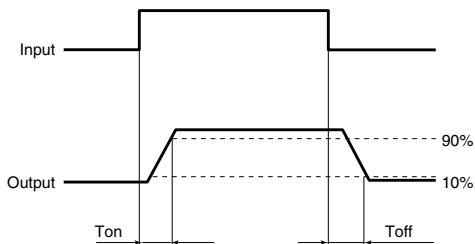

RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	I _F	Standard type: 5 Reinforced type: 5 to 10	mA

■ For Dimensions.

■ For Schematic and Wiring Diagrams.

■ For Cautions for Use.

■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.


For more information.

REFERENCE DATA

1-(1). Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to $+85^{\circ}\text{C}$
 -40°F to $+185^{\circ}\text{F}$


Type of connection: A

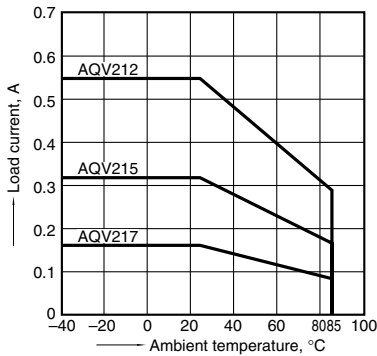

1-(2). Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40°C to $+85^{\circ}\text{C}$
 -40°F to $+185^{\circ}\text{F}$

Type of connection: A

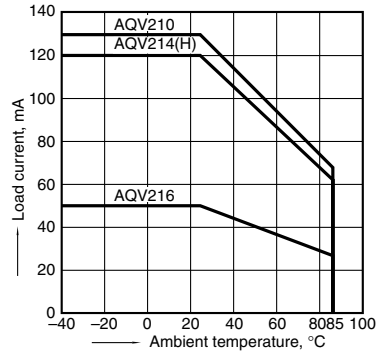


2-(1). On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;
 LED current: 5 mA; Load voltage: Max. (DC)
 Continuous load current: Max. (DC)

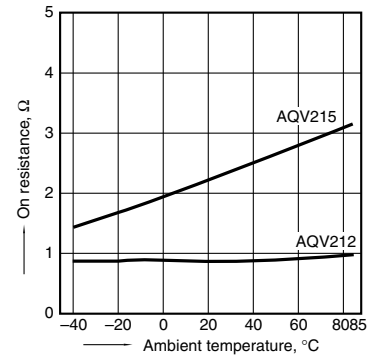


2-(2). On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;
 LED current: 5 mA; Load voltage: Max. (DC)
 Continuous load current: Max. (DC)

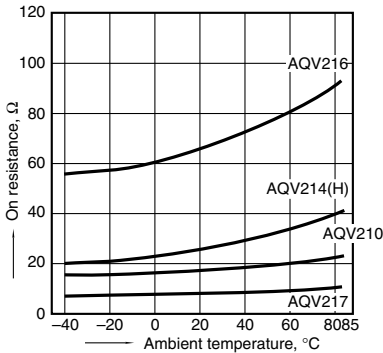


3. Turn on time vs. ambient temperature characteristics

LED current: 5 mA;
 Load voltage: Max. (DC);
 Continuous load current: Max. (DC)

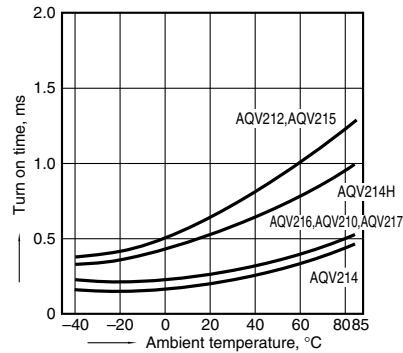


4. Turn off time vs. ambient temperature characteristics

LED current: 5 mA;
 Load voltage: Max. (DC);
 Continuous load current: Max. (DC)

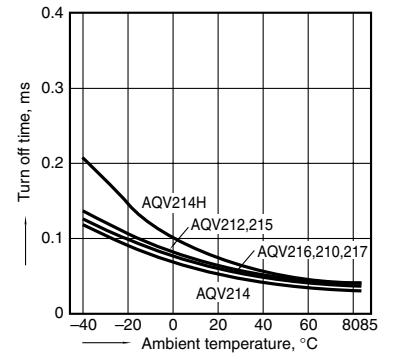


5-(1). LED operate current vs. ambient temperature characteristics

Load voltage: Max. (DC);
 Continuous load current: Max. (DC)

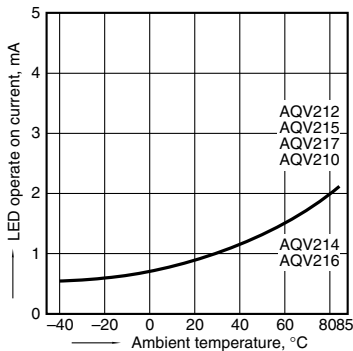


5-(2). LED operate current vs. ambient temperature characteristics

Load voltage: Max. (DC);
 Continuous load current: Max. (DC)

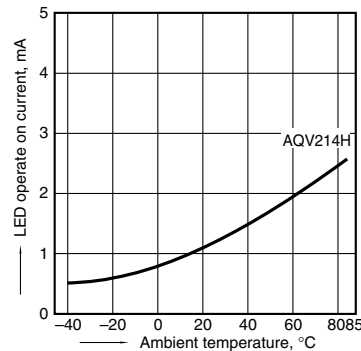

6-(1). LED turn off current vs. ambient temperature characteristics


Load voltage: Max. (DC);
 Continuous load current: Max. (DC)

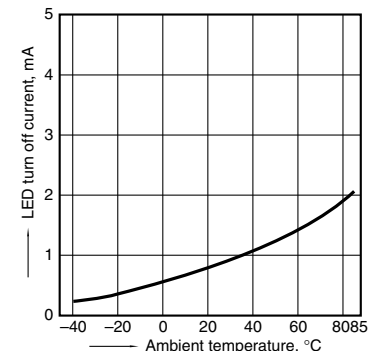

GU 1 Form A (AQV210, AQV214H)


6-(2). LED turn off current vs. ambient temperature characteristics

Load voltage: Max. (DC);
Continuous load current: Max. (DC)

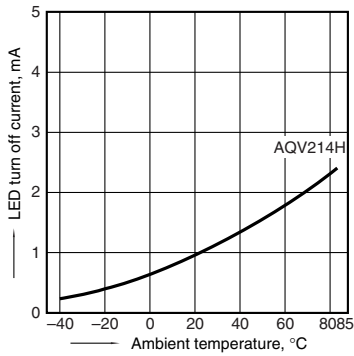


7. LED dropout voltage vs. ambient temperature characteristics

Sample: All types
LED current: 5 to 50 mA

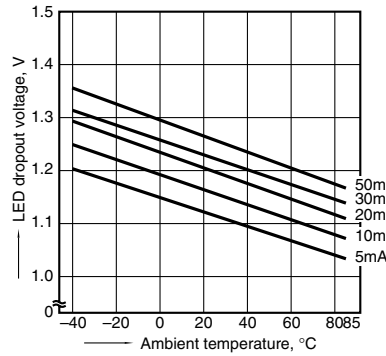


8-(1). Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F




8-(2). Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F




9-(1). Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

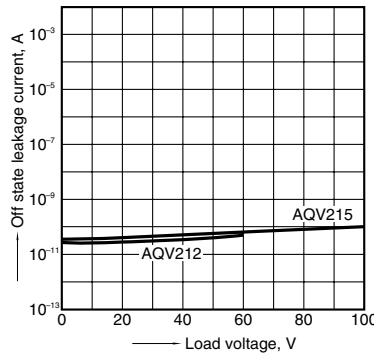


9-(2). Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

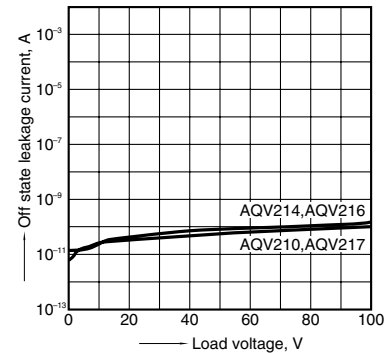


10-(1). Turn on time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

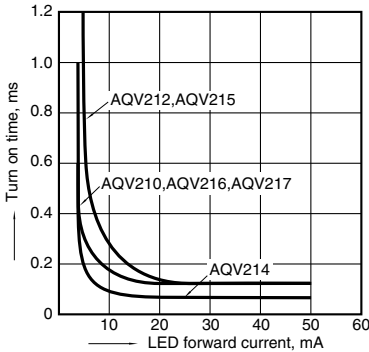


10-(2). Turn on time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
Load voltage: 400 V (DC); Continuous load current: 120 mA (DC); Ambient temperature: 25°C 77°F

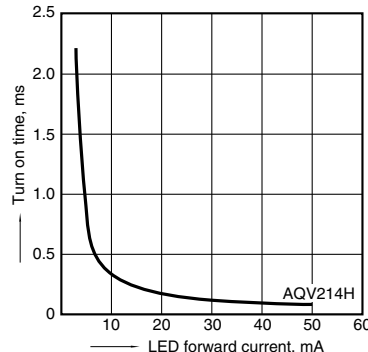


11. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

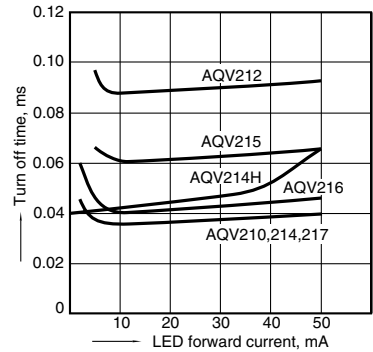

12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 4 and 6;
Frequency: 1 MHz; Ambient temperature: 25°C 77°F

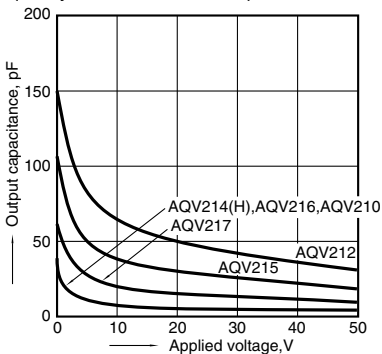



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331