

Mechanical Connectors


Joint Type	Mechanical Connectors included
CM0 Range	4 × MC1/0 and Allen Key
CM1 Range	4 × MC1/1 and Allen Key
CM2 Range	4 × MC1/2 and Allen Key
CM3 Range	4 × MC1/3 and Allen Key
CM4 Range	4 × MC1/3 and Allen Key

www.element14.com
www.farnell.com
www.newark.com
www.cpc.co.uk

Shell Dimensions

Straight-through Joints				
Type	A	B	C	
			Minimum	Maximum
CM0 Range	200	35	5	20
CM1 Range	250	45	8	30
CM2 Range	320	60	10	34
CM3 Range	450	75	30	48
CM4 Range	550	100	40	66

All shells are injection-moulded from high-impact polycarbonate to form clear, rigid and strong pairs which clip together easily and provide a robust seal to prevent resin leakage

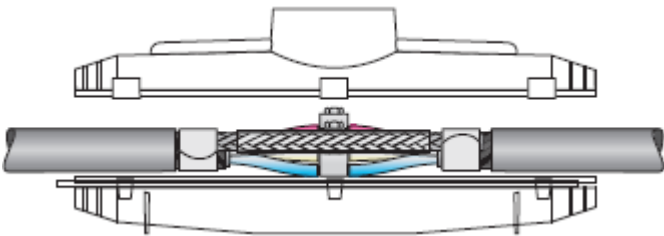

Supplied complete with 4 mechanical connectors and Allen Key
Everything needed to complete a cable joint - all in one box!

Mechanical Connectors - MC1 Range

Brass Connectors (set of 4) with Allen Key				
Core Sizes mm ²	To Maximum 10 mm ²	To Maximum 25 mm ²	To Maximum 50 mm ²	To Maximum 120 mm ²
1.5 - 10	MC1/0	MC1/1	MC1/2	MC1/3
16 - 25	MC1/1	MC1/2	MC1/2	MC1/3
35 - 50	MC1/2	MC1/2	MC1/2	MC1/3
70 - 120	MC1/3	MC1/3	MC1/3	MC1/3

The range of ProPower LV Resin cable joints represents the very best available in terms of design, quality, ease of use and relevant certification

Injection Moulded Shells

Rigid and very strong, their snap-lock design forms an excellent seal and prevents egress of resin

Mechanical Connectors

These have been especially designed to match the same range of cable sizes as the joints they are supplied with, machined from solid brass, they are suitable for either copper or aluminium conductors. Two Allen screws for each core ensure a sound electrical performance and an Allen key is also provided with each kit to ensure that everything needed to join a cable is included in the one box

Earth Braid (Not EX variants)

Offers significant advantages over “single wire type” earth continuity systems, which can fail if poorly positioned within wire armour cores that have “spread”. The flat, soft braid ensures good electrical contact and is insulated for extra protection

Constant Force Springs (Not EX variants)

Cable joints move and expand due to earth shift and heat from electrical current. Constant force springs react to this movement and maintain a sound electrical connection between the steel wire armouring and the earth continuity braid

Core separators

Provide safe separation of cores and connectors

Two-part resin

This long-proven resin formula is of such quality that it is equally suitable for both LV and MV applications and provides excellent adhesion to PVC, XLPE, polythene and paper cables. It is supplied in two-part easy-mix packaging, ensuring both convenience and safety

Packaging

Pro Power joints are supplied in especially robust and rigid boxes to withstand stacking both in warehouses and in pallets. These boxes are also popular with jointers since they can be used as “mini workbenches”

Instructions

Detailed, clear and concise instruction sheets, mostly printed in full colour, ensure there is no ambiguity about safe jointing procedures

Certification

To CENELEC HD 623.S1/DIN VDE 0278, now renamed EN50393:2006 (BS6910 and BS7888 standards are now obsolete)

LV Joints for Armoured Cables

c / w mechanical connectors and earth continuity kits



Quick Selection															
No of Cores	Armoured Cable Size (mm ²)														
	1.5	2.5	4	6	10	16	25	35	50	70	95	120	150	185	240
2	A					B		C		D			E		
3	A				B		C	D				E		Special	
4	A				B		C	D				E	Special		

LV Joints for Unarmoured Cables

c / w mechanical connectors



Quick Selection															
No of Cores	Unarmoured Cable Size (mm ²)														
	1.5	2.5	4	6	10	16	25	35	50	70	95	120	150	185	240
2	AEX					BEX		CEX		DEX			EEX		
3	AEX				BEX		CEX	DEX				EEX		Special	
4	AEX					BEX	CEX		DEX			EEX	Special		

CTL Cold-Pour Two-Part Resins

Features:



- Two-part Polyurethane resin in protective aluminium foil
- Mixing is performed in sealed conditions - no need for skin contact but safety gloves are provided
- Controlled curing temperature designed to be compatible with PVC, XLPE, EPR, Polythene and PILC cables
- Clear mixing instructions on every pack
- Full Health and Safety labelling
- Batch number and use-by-date on every pack
- Designed to meet the requirements of BS 6910, BS7888, CENELEC HD623 S1 and EN50393:2006
- The same well-proven high quality resin formula is used as standard throughout both the LV and MV ranges

LV Resin Cable Joints

pro-POWER

Specifications	
Mixed Properties	Pack designed to contain factory dispensed quantities of resin and hardener
Specific Gravity	1.4 Resin, 1.22 Hardener
Density (g / ml)	1.36 mixed system
Colour	Cream (standard)
Gel Time	20 - 30 minutes at 21°C for 200 g mass
Peak Exothermic	54 - 75°C depending upon volume and ambient temperature
Complete Cure Time	at 23°C - 24 hours at 80°C - 1 hour
Shelf Life	24 months when stored at 5°C - 15°C
Operating Temperature	-40°C to +100° C continuous, for cured product
Thermal Conductivity	>0.4 w / mK
Tensile Strength	45 MPa
Electrical Strength	20 kV / mm
Health and Safety	Each pack contains mixing instructions and carries health and safety warnings. H and S (COSHH) Information Sheet available upon request
Transportation	No special labelling required for shipments by air, sea or road (UN No 2489, packaging group III)



Joint Type	Useable Volume of Pack
CM0 Range	180 ml
CM1 Range	350 ml
CM2 Range	825 ml
CM3 Range	1,850 ml
CM4 Range	3,825 ml

Part Number Table

Description	Part Number
Cable Joint, Armoured, 5 - 20 mm	CM0+C
Cable Joint, Armoured, 8 - 30 mm	CM1+C
Cable Joint, Armoured, 10 - 34 mm	CM2+C
Cable Joint, Armoured, 30 - 48 mm	CM3+C
Cable Joint, Armoured, 40 - 66 mm	CM4+C

Description	Part Number
Cable Joint, Unarmoured, 5 - 20 mm	CM0+CEX
Cable Joint, Unarmoured, 8 - 30 mm	CM1+CEX
Cable Joint, Unarmoured, 10 - 34 mm	CM2+CEX
Cable Joint, Unarmoured, 30 - 48 mm	CM3+CEX
Cable Joint, Unarmoured, 44 - 66 mm	CM4+CEX

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Pro-POWER is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com
www.farnell.com
www.newark.com
www.cpc.co.uk

pro-POWER



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331