


Features

- Designed for VHF/UHF Amplifier Applications and High Output VHF Oscillators
- High Current Gain Bandwidth Product
- Ideal for Mixer and RF Amplifier Applications with collector currents in the 100 μ A - 30 mA Range
- **Lead, Halogen and Antimony Free, RoHS Compliant "Green" Device (Notes 3 and 4)**
- **Qualified to AEC-Q101 Standards for High Reliability**

Mechanical Data

- Case: SOT-23
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020D
- Terminals: Solderable per MIL-STD-202, Method 208
- Terminal Connections: See Diagram
- Lead Free Plating (Matte Tin Finish annealed over Alloy 42 leadframe).
- Marking Information: K3H, K3Y; See Page 3
- Ordering Information: See Page 3
- Weight: 0.008 grams (approximate)

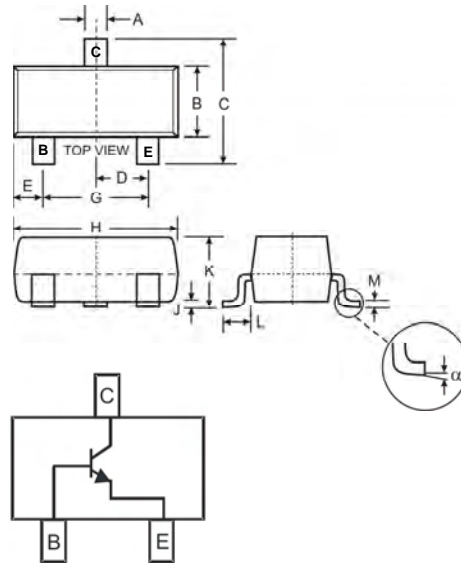

| SOT-23 | | |
|----------------------|-------|-------|
| Dim | Min | Max |
| A | 0.37 | 0.51 |
| B | 1.20 | 1.40 |
| C | 2.30 | 2.50 |
| D | 0.89 | 1.03 |
| E | 0.45 | 0.60 |
| G | 1.78 | 2.05 |
| H | 2.80 | 3.00 |
| J | 0.013 | 0.10 |
| K | 0.903 | 1.10 |
| L | 0.45 | 0.61 |
| M | 0.085 | 0.180 |
| α | 0° | 8° |
| All Dimensions in mm | | |

Maximum Ratings @ $T_A = 25^\circ\text{C}$ unless otherwise specified

| Characteristic | Symbol | Value | Unit |
|--|-----------------|-------------|--------------------|
| Collector-Base Voltage | V_{CB0} | 30 | V |
| Collector-Emitter Voltage | V_{CEO} | 25 | V |
| Emitter-Base Voltage | V_{EBO} | 3.0 | V |
| Collector Current - Continuous (Note 1) | I_C | 50 | mA |
| Power Dissipation (Note 1) | P_D | 300 | mW |
| Thermal Resistance, Junction to Ambient (Note 1) | $R_{\theta JA}$ | 417 | $^\circ\text{C/W}$ |
| Operating and Storage Temperature Range | T_J, T_{STG} | -55 to +150 | $^\circ\text{C}$ |

Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

| Characteristic | Symbol | Min | Max | Unit | Test Condition |
|--------------------------------------|---------------|-----|------|------|---|
| OFF CHARACTERISTICS (Note 2) | | | | | |
| Collector-Emitter Breakdown Voltage | $V_{(BR)CEO}$ | 25 | — | V | $I_C = 1\text{mA}, I_B = 0$ |
| Collector-Base Breakdown Voltage | $V_{(BR)CBO}$ | 30 | — | V | $I_C = 100\mu\text{A}, I_E = 0$ |
| Emitter-Base Breakdown Voltage | $V_{(BR)EBO}$ | 3.0 | — | V | $I_E = 10\mu\text{A}, I_C = 0$ |
| Collector Cutoff Current | I_{CBO} | — | 100 | nA | $V_{CB} = 25\text{V}, I_E = 0$ |
| Emitter Cutoff Current | I_{EBO} | — | 100 | nA | $V_{EB} = 2\text{V}, I_C = 0$ |
| ON CHARACTERISTICS (Note 2) | | | | | |
| DC Current Gain | h_{FE} | 60 | — | — | $I_C = 4\text{mA}, V_{CE} = 10.0\text{V}$ |
| Collector-Emitter Saturation Voltage | $V_{CE(SAT)}$ | — | 0.5 | V | $I_C = 4\text{mA}, I_B = 400\mu\text{A}$ |
| Base-Emitter On Voltage | $V_{BE(SAT)}$ | — | 0.95 | V | $I_C = 4\text{mA}, V_{CE} = 10.0\text{V}$ |
| SMALL SIGNAL CHARACTERISTICS | | | | | |
| Current Gain-Bandwidth Product | f_T | 650 | — | MHz | $V_{CE} = 10\text{V}, f = 100\text{MHz}, I_C = 4\text{mA}$ |
| Collector-Base Capacitance | C_{CB} | — | 0.7 | pF | $V_{CB} = 10\text{V}, f = 1.0\text{MHz}, I_E = 0$ |
| Collector-Base Feedback Capacitance | C_{RB} | — | 0.65 | pF | $V_{CB} = 10\text{V}, f = 1.0\text{MHz}, I_E = 0$ |
| Collector-Base Time Constant | $R_b'C_c$ | — | 9 | ps | $V_{CB} = 10\text{V}, f = 31.8\text{MHz}, I_C = 4\text{mA}$ |

- Notes:
1. Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch, pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.
 2. Short duration pulse test used to minimize self-heating effect.
 3. No purposefully added lead. Halogen and Antimony Free.
 4. Product manufactured with Data Code V9 (week 33, 2008) and newer are built with Green Molding Compound. Product manufactured prior to Date V9 are built with Non-Green Molding Compound and may contain Halogens or Sb_2O_3 Fire Retardants.

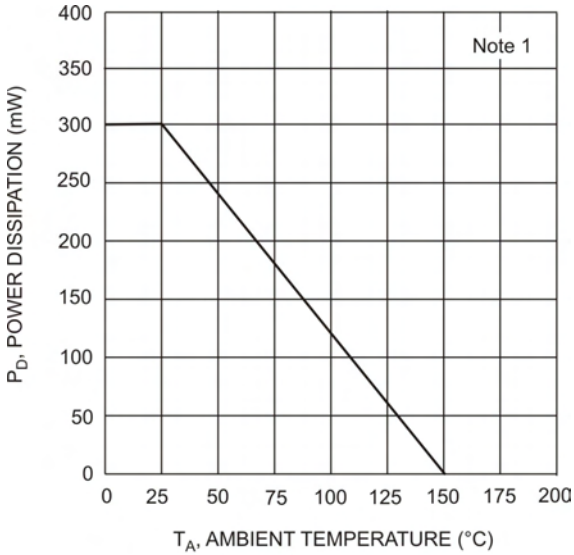


Fig. 1, Max Power Dissipation vs Ambient Temperature

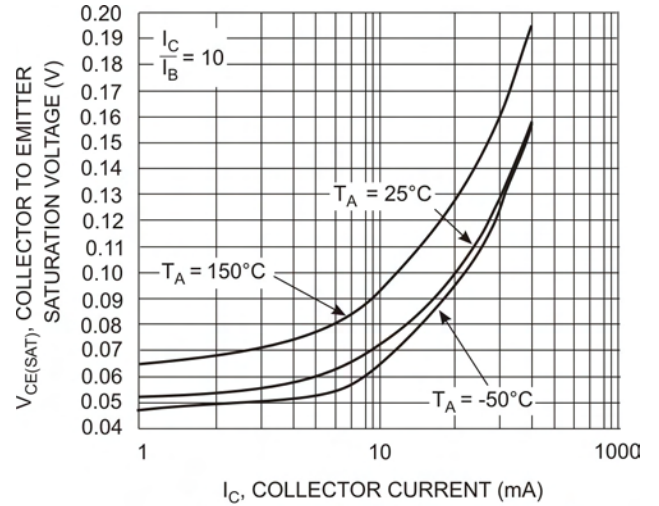


Fig. 2 Collector Emitter Saturation Voltage vs. Collector Current

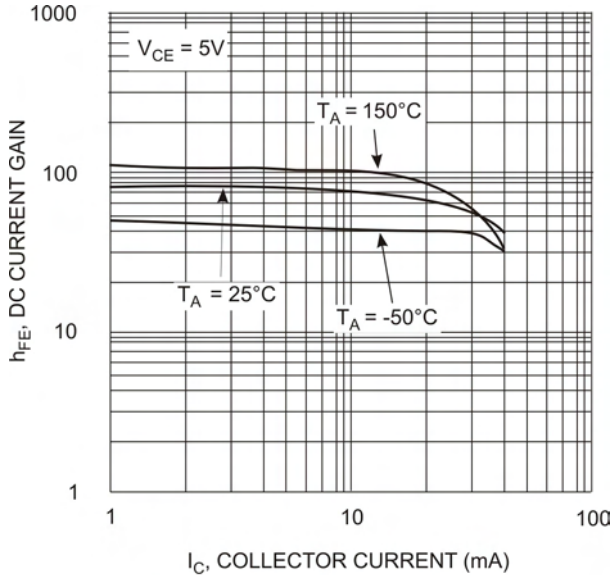


Fig. 3, DC Current Gain vs. Collector Current

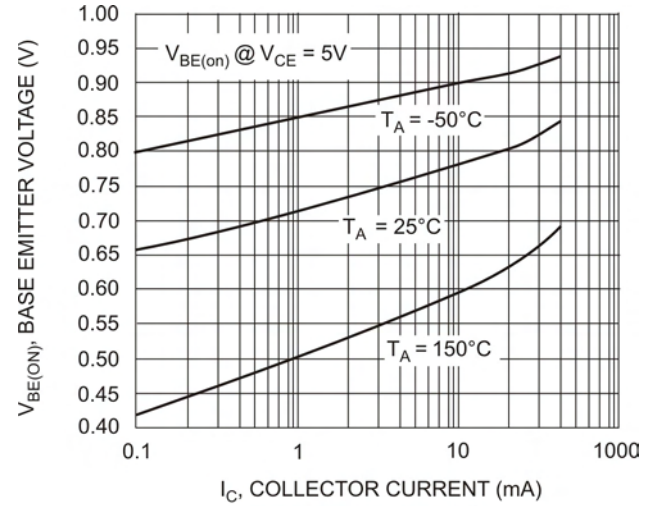


Fig. 4 Base Emitter Voltage vs. Collector Current

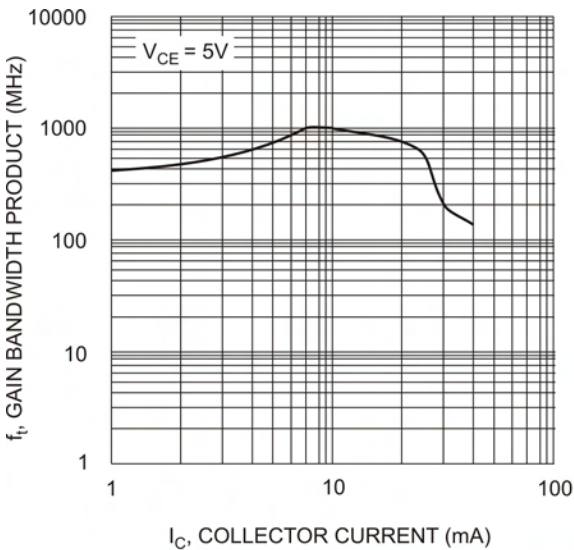



Fig. 5, Gain Bandwidth Product vs Collector Current

Ordering Information (Note 5)

| Device | Packaging | Shipping |
|-------------|-----------|------------------|
| MMBTH10-7-F | SOT-23 | 3000/Tape & Reel |

Notes: 5. For packaging details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information



K3x = Product Type Marking Code, e.g. K3H
 YM = Date Code Marking
 Y = Year ex: N = 2002
 M = Month ex: 9 = September

Date Code Key

| Year | 1998 | 1999 | 2000 | 2001 | 2002 | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 | 2010 | 2011 | 2012 |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Code | J | K | L | M | N | P | R | S | T | U | V | W | X | Y | Z |

| Month | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Code | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | O | N | D |

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331