

Interface module - UM 45-D 9SUB/S - 2962777

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



VARIOFACE module, with screw connection and D-subminiature pin strip, for assembly on NS 35/7.5, 9 positions

The illustration shows the version UM 45-D37SUB/S



Key commercial data

Packing unit	1
Minimum order quantity	1
Catalog page	Page 250 (IF-2007)
GTIN	 4 017918 087432
Custom tariff number	85369010
Country of origin	GERMANY

Technical data

General data

Nominal voltage UN	125 V AC/DC
Max. current carrying capacity per branch	2.5 A
Max. current carrying capacity per branch	1.5 A (with even load on all branches)
Number of positions	9
Width	54 mm
Height	45 mm
Depth	42 mm
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Test voltage	800 V (50 Hz, 1 min.)
Mounting position	Any
Standards/regulations	IEC 60664
Standards/regulations	DIN VDE 110
Pollution degree	2
Surge voltage category	II
Rated surge voltage	1.2 kV

Interface module - UM 45-D 9SUB/S - 2962777

Technical data

General data

Rated insulation voltage	125 V
--------------------------	-------

Connection data for connection 1

Connection name	PCB connection
Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Conductor cross section solid min.	0.14 mm ²
Conductor cross section solid max.	1.5 mm ²
Conductor cross section stranded min.	0.14 mm ²
Conductor cross section stranded max.	1.5 mm ²
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	16
Stripping length	6 mm
Screw thread	M3

Classifications

eclass

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242608

etim

ETIM 2.0	EC001434
ETIM 3.0	EC001604
ETIM 4.0	EC001604
ETIM 5.0	EC002780

unspsc

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / GOST / cULus Recognized

Interface module - UM 45-D 9SUB/S - 2962777

Approvals

Ex Approvals

Approvals submitted

Approval details

UL Recognized	
mm ² /AWG/kcmil	30-14
Nominal current I _N	2.5 A
Nominal voltage U _N	125 V

cUL Recognized	
mm ² /AWG/kcmil	30-14
Nominal current I _N	2.5 A
Nominal voltage U _N	125 V

GOST	
------	--

cULus Recognized	
------------------	--

Accessories

Accessories

Cable/conductor

Cable - CABLE-D 9SUB/B/S/ 50/KONFEK/S - 2299987



Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 0.5 m

Interface module - UM 45-D 9SUB/S - 2962777

Accessories

Cable - CABLE-D 9SUB/B/S/100/KONFEK/S - 2299990



Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 1 m

Cable - CABLE-D 9SUB/B/S/150/KONFEK/S - 2300009



Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 1.5 m

Cable - CABLE-D 9SUB/B/S/200/KONFEK/S - 2302010



Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 2 m

Cable - CABLE-D 9SUB/B/S/300/KONFEK/S - 2302023



Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 3 m

Cable - CABLE-D 9SUB/B/S/400/KONFEK/S - 2302036



Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 4 m

Cable - CABLE-D 9SUB/B/S/600/KONFEK/S - 2302049



Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 6 m

Interface module - UM 45-D 9SUB/S - 2962777

Accessories

Cable - CABLE D-SUB-S/.../.../... - 2302340



Shielded round cable, assembled with one D-SUB male and one female connector, variable cable length

Cable - CABLE D-SUB-B-B-S/.../.../... - 2302421



Shielded round cable, assembled with two D-SUB female connectors, variable cable length

Cable - CABLE-D- 9SUB/F/OE/0,25/S/0,5M - 2926014



Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 0.5 m.

Cable - CABLE-D- 9SUB/F/OE/0,25/S/1,0M - 2926027



Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 1 m.

Cable - CABLE-D- 9SUB/F/OE/0,25/S/1,5M - 2926030



Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 1.5 m.

Interface module - UM 45-D 9SUB/S - 2962777

Accessories

Cable - CABLE-D- 9SUB/F/OE/0,25/S/2,0M - 2926043



Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 2 m.

Cable - CABLE-D- 9SUB/F/OE/0,25/S/3,0M - 2926056



Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 3 m.

Cable - CABLE-D- 9SUB/F/OE/0,25/S/4,0M - 2926069



Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 4 m.

Cable - CABLE-D- 9SUB/F/OE/0,25/S/6,0M - 2926072



Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 6 m.

Cable - CABLE-D- 9SUB-F-OE-0,25-S/... - 2900903




Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: variable.

Drawings

Interface module - UM 45-D 9SUB/S - 2962777

Circuit diagram

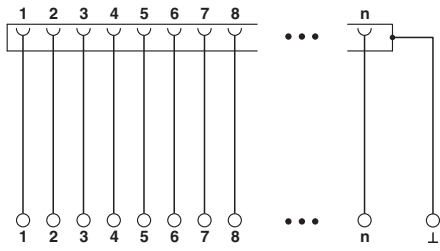

© Phoenix Contact 2012 - all rights reserved
<http://www.phoenixcontact.com>



Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331