


## General Purpose Industrial VRS Magnetic Speed Sensors

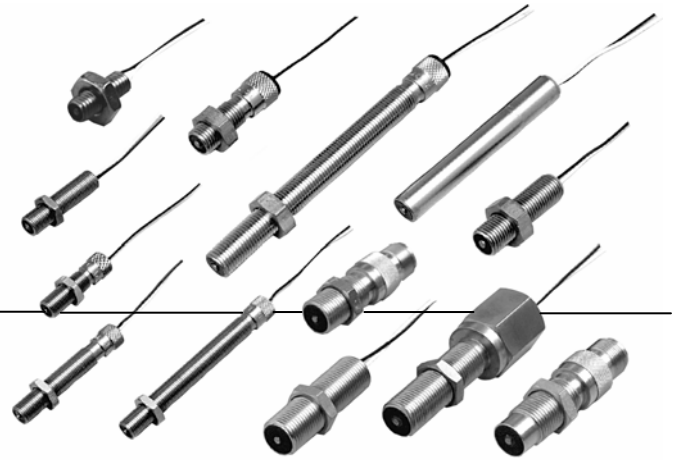

### DESCRIPTION

General Purpose VRS sensors are designed for use in applications with medium to high speeds or in electrically noisy environments with relatively small air gaps.

Passive VRS (Variable Reluctance Speed) Magnetic Speed sensors are simple, rugged devices that do not require an external voltage source for operation.

A permanent magnet in the sensor establishes a fixed magnetic field. The approach and passing of a ferrous metal target near the sensor's pole piece (sensing area) changes the flux of the magnetic field, dynamically changing its strength. This change in magnetic field strength induces a current into a coil winding which is attached to the output terminals.

### FEATURES

- Self-powered operation
- Direct conversion of actuator speed to output frequency
- Simple installation
- No moving parts
- Designed for use over a wide range of speeds
- Adaptable to a wide variety of configurations
- Customized VRS products for unique speed sensing applications
- Housing diameters: 5/8 in (M16), 3/8 in (M12) mm, 1/4 in (M8), 10/32 in
- Housing materials/styles: stainless steel threaded or smooth
- Terminations: MS3106 connector, preleaded
- Output voltages: 8 Vp-p to 40 Vp-p

The output signal of a VRS sensor is an ac voltage that varies in amplitude and wave frequency as the speed of the monitored device changes, and is usually expressed in peak to peak voltage (Vp-p).

One complete waveform (cycle) occurs as each target passes the sensor's pole piece. If a standard gear were used as a target, this output signal would resemble a sine wave if viewed on an oscilloscope.

Honeywell also offers VRS sensors for high output, power output, high resolution, high temperature and hazardous location applications, as well as low-cost molded versions.

### POTENTIAL APPLICATIONS

- Engine RPM (revolutions per minute) measurement on aircraft, automobiles, boats, buses, trucks and rail vehicles
- Motor RPM measurement on drills, grinders, lathes and automatic screw machines
- Motor RPM measurement on precision camera, tape recording and motion picture equipment
- Process speed measurement on food, textile, paper, woodworking, printing, tobacco and pharmaceutical industry machinery
- Motor speed measurement of electrical generating equipment
- Speed measurement of pumps, blowers, mixers, exhaust and ventilating fans
- Flow measurement on turbine meters
- Wheel-slip measurement on autos and locomotives
- Gear speed measurement

# General Purpose

## 5/8 INCH (M16\*) SENSORS (All dimensions for reference only. mm/[in])

\*Contact Honeywell for availability of metric mounting thread versions.

### General Specifications

| Parameter             | Characteristic                         | Parameter                | Characteristic                         |
|-----------------------|----------------------------------------|--------------------------|----------------------------------------|
| Min. output voltage   | 40 Vp-p                                | Inductance               | 25 mH max.                             |
| Coil resistance       | 45 Ohm to 85 Ohm                       | Gear pitch range         | 24 DP (module 1.06) or coarser         |
| Pole piece diameter   | 2,69 mm [0.106 in]                     | Optimum actuator         | 20 DP (module 1.27) ferrous metal gear |
| Min. surface speed    | 0,50 m/s [20 in/s] typ.                | Max. operating frequency | 50 kHz typ.                            |
| Operating temp. range | -55 °C to 120 °C<br>[-67 °F to 250 °F] | Vibration                | Mil-Std 202F<br>Method 204D            |
| Mounting thread       | 5/8-18 UNF-2A                          | Termination              | MS3106 connector                       |

### Test Condition Specifications

| Parameter       | Characteristic         |
|-----------------|------------------------|
| Surface speed   | 25 m/s<br>[1000 in/s]  |
| Gear            | 20 DP<br>(module 1.27) |
| Air gap         | 0,127 mm<br>[0.005 in] |
| Load resistance | 100 kOhm               |

| Catalog Listing | Thread Length (A) | Weight         |  |
|-----------------|-------------------|----------------|--|
| 3010AN          | 28 mm [1.1 in]    | 70 g [2.5 oz]  |  |
| 3010AN25        | 63 mm [2.5 in]    | 84 g [3.0 oz]  |  |
| 3010AN30        | 76 mm [3.0 in]    | 84 g [3.0 oz]  |  |
| 3010AN40        | 101 mm [4.0 in]   | 98 g [3.5 oz]  |  |
| 3010AN50        | 127 mm [5.0 in]   | 128 g [4.5 oz] |  |

| Catalog Listing | Thread Length (A) | Weight        |  |
|-----------------|-------------------|---------------|--|
| 3010A           | 35 mm [1.4 in]    | 70 g [2.5 oz] |  |
| 3010A25         | 63 mm [2.5 in]    | 84 g [3.0 oz] |  |

# Industrial VRS Magnetic Speed Sensors

## 5/8 INCH (M16\*) SENSORS CONTINUED (All dimensions for reference only. mm/[in])

\*Contact Honeywell for availability of metric mounting thread versions.

### General Specifications

| Parameter             | Characteristic                         | Parameter                | Characteristic                            |
|-----------------------|----------------------------------------|--------------------------|-------------------------------------------|
| Min. output voltage   | 40 Vp-p                                | Inductance               | 25 mH max.                                |
| Coil resistance       | 45 Ohm to 85 Ohm                       | Gear pitch range         | 24 DP (module 1.06)<br>or coarser         |
| Pole piece diameter   | 2,69 mm [0.106 in]                     | Optimum actuator         | 20 DP (module 1.27)<br>ferrous metal gear |
| Min. surface speed    | 0,50 m/s [20 in/s] typ.                | Max. operating frequency | 50 kHz typ.                               |
| Operating temp. range | -55 °C to 120 °C<br>[-67 °F to 250 °F] | Vibration                | Mil-Std 202F<br>Method 204D               |
| Mounting thread       | 5/8-18 UNF-2A                          | Termination              | 20 AWG Teflon-insulated leads             |

### Test Condition Specifications

| Parameter       | Characteristic         |
|-----------------|------------------------|
| Surface speed   | 25 m/s<br>[1000 in/s]  |
| Gear            | 20 DP<br>(module 1.27) |
| Air gap         | 0,127 mm<br>[0.005 in] |
| Load resistance | 100 kOhm               |

| Catalog Listing | Weight         |  |
|-----------------|----------------|--|
| 3010H20         | 140 g [5.0 oz] |  |

| Catalog Listing | Thread Length (A) | Weight        |  |
|-----------------|-------------------|---------------|--|
| 3010S20         | 50 mm [2.0 in]    | 70 g [2.5 oz] |  |
| 3010S30         | 76 mm [3.0 in]    | 84 g [3.0 oz] |  |

# General Purpose

## 3/8 INCH (M12\*) SENSORS

\*Contact Honeywell for availability of metric mounting thread versions.

### General Specifications

| Parameter             | Characteristic                      | Parameter                | Characteristic                         |
|-----------------------|-------------------------------------|--------------------------|----------------------------------------|
| Min. output voltage   | 20 Vp-p                             | Inductance               | 15 mH max.                             |
| Coil resistance       | 45 Ohm to 65 Ohm                    | Gear pitch range         | 26 DP (module 0.98) or coarser         |
| Pole piece diameter   | 2,36 mm [0.093 in]                  | Optimum actuator         | 24 DP (module 1.06) ferrous metal gear |
| Min. surface speed    | 0,50 m/s [20 in/s] typ.             | Max. operating frequency | 50 kHz typ.                            |
| Operating temp. range | -40 °C to 107 °C [-40 °F to 225 °F] | Vibration                | Mil-Std 202F Method 204D               |
| Mounting thread       | 3/8-24 UNF-2A                       | Termination              | 24 AWG vinyl-insulated leads           |

### Test Condition Specifications

| Parameter       | Characteristic      |
|-----------------|---------------------|
| Surface speed   | 25 m/s [1000 in/s]  |
| Gear            | 20 DP (module 1.27) |
| Air gap         | 0,127 mm [0.005 in] |
| Load resistance | 100 kOhm            |

| Catalog Listing | Thread Length (A) | Weight        |  |
|-----------------|-------------------|---------------|--|
| 3015A           | 20 mm [0.8 in]    | 28 g [1.0 oz] |  |
| 3015A17         | 44 mm [1.7 in]    | 35 g [1.2 oz] |  |
| 3015A35         | 88 mm [3.5 in]    | 42 g [1.5 oz] |  |

| Catalog Listing | Weight        |  |
|-----------------|---------------|--|
| 3015S13         | 28 g [1.0 oz] |  |

| Catalog Listing | Thread Length (A) | Weight        |  |
|-----------------|-------------------|---------------|--|
| 3015SS13        | 30 mm [1.2 in]    | 28 g [1.0 oz] |  |
| 3015SS25        | 63 mm [2.5 in]    | 42 g [152 oz] |  |

# Industrial VRS Magnetic Speed Sensors

## 1/4 INCH (M8\*) SENSORS (All dimensions for reference only. mm/[in])

\*Contact Honeywell for availability of metric mounting thread versions.

### General Specifications

| Parameter             | Characteristic                         | Parameter                | Characteristic                         |
|-----------------------|----------------------------------------|--------------------------|----------------------------------------|
| Min. output voltage   | 12 Vp-p                                | Inductance               | 16 mH max.                             |
| Coil resistance       | 190 Ohm max.                           | Gear pitch range         | 36 DP (module 0.70) or coarser         |
| Pole piece diameter   | 1,00 mm [0.040 in]                     | Optimum actuator         | 28 DP (module 0.90) ferrous metal gear |
| Min. surface speed    | 0,75 m/s [30 in/s] typ.                | Max. operating frequency | 60 kHz typ.                            |
| Operating temp. range | -40 °C to 107 °C<br>[-40 °F to 225 °F] | Vibration                | Mil-Std 202F<br>Method 204D            |
| Mounting thread       | 1/4-40 UNS-2A                          | Termination              | 30 AWG vinyl-insulated leads           |

### Test Condition Specifications

| Parameter       | Characteristic         |
|-----------------|------------------------|
| Surface speed   | 25 m/s<br>[1000 in/s]  |
| Gear            | 20 DP<br>(module 1.27) |
| Air gap         | 0,127 mm<br>[0.005 in] |
| Load resistance | 100 kOhm               |

| Catalog Listing | Thread Length (A) | Weight        |  |
|-----------------|-------------------|---------------|--|
| 3050            | 15 mm [0.6 in]    | 14 g [0.5 oz] |  |
| 3050A13         | 30 mm [1.2 in]    | 14 g [0.5 oz] |  |
| 3050A20         | 50 mm [2.0 in]    | 14 g [0.5 oz] |  |

| Parameter             | Characteristic                         | Parameter                | Characteristic                         | Parameter       | Characteristic         |
|-----------------------|----------------------------------------|--------------------------|----------------------------------------|-----------------|------------------------|
| Min. output voltage   | 12 Vp-p                                | Inductance               | 16 mH max.                             | Surface speed   | 25 m/s<br>[1000 in/s]  |
| Coil resistance       | 190 Ohm max.                           | Gear pitch range         | 36 DP (module 0.70) or coarser         | Gear            | 20 DP<br>(module 1.27) |
| Pole piece diameter   | 1,00 mm [0.040 in]                     | Optimum actuator         | 28 DP (module 0.90) ferrous metal gear | Air gap         | 0,127 mm<br>[0.005 in] |
| Min. surface speed    | 0,75 m/s [30 in/s] typ.                | Max. operating frequency | 60 kHz typ.                            | Load resistance | 100 kOhm               |
| Operating temp. range | -40 °C to 107 °C<br>[-40 °F to 225 °F] | Vibration                | Mil-Std 202F<br>Method 204D            |                 |                        |
| Mounting thread       | 1/4-40 UNS-2A                          | Termination              | 30 AWG PVC-insulated leads             |                 |                        |

| Catalog Listing | Thread Length  | Weight        |  |
|-----------------|----------------|---------------|--|
| 3050S10         | 25 mm [1.0 in] | 14 g [0.5 oz] |  |

# General Purpose

## 10/32 INCH SENSORS (All dimensions for reference only. mm/[in])


(No metric available.)

### General Specifications

| Parameter             | Characteristic                      | Parameter                | Characteristic                         |
|-----------------------|-------------------------------------|--------------------------|----------------------------------------|
| Min. output voltage   | 8 Vp-p                              | Inductance               | 14 mH max.                             |
| Coil resistance       | 155 Ohm                             | Gear pitch range         | 32 DP (module 0.80) or coarser         |
| Pole piece diameter   | 1,5 mm [0.062 in]                   | Optimum actuator         | 26 DP (module 0.98) ferrous metal gear |
| Min. surface speed    | 0,75 m/s [30 in/s] typ.             | Max. operating frequency | 60 kHz (typ.)                          |
| Operating temp. range | -40 °C to 107 °C [-40 °F to 225 °F] | Vibration                | Mil-Std 202F Method 204D               |
| Mounting thread       | 10-32 UNF-2A                        | Termination              | 32 AWG Teflon-insulated leads          |

### Test Condition Specifications

| Parameter       | Characteristic      |
|-----------------|---------------------|
| Surface speed   | 25 m/s [1000 in/s]  |
| Gear            | 20 DP (module 1.27) |
| Air gap         | 0,127 mm [0.005 in] |
| Load resistance | 100 kOhm            |

| Catalog Listing | Thread Length  | Weight         |                                                                                     |
|-----------------|----------------|----------------|-------------------------------------------------------------------------------------|
| 3080            | 12 mm [0.5 in] | 8,5 g [0.3 oz] |  |

# Industrial VRS Magnetic Speed Sensors

THIS PAGE INTENTIONALLY LEFT BLANK.

## **WARNING**

### **PERSONAL INJURY**

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

**Failure to comply with these instructions could result in death or serious injury.**

### **WARRANTY/REMEDY**

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

## **WARNING**

### **MISUSE OF DOCUMENTATION**

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

**Failure to comply with these instructions could result in death or serious injury.**

### **SALES AND SERVICE**

Honeywell serves its customers through a worldwide network of sales offices, representatives and distributors. For application assistance, current specifications, pricing or name of the nearest Authorized Distributor, contact your local sales office or:

**E-mail:** [info.sc@honeywell.com](mailto:info.sc@honeywell.com)

**Internet:** [www.honeywell.com/sensing](http://www.honeywell.com/sensing)

#### **Phone and Fax:**

|               |                         |
|---------------|-------------------------|
| Asia Pacific  | +65 6355-2828           |
|               | +65 6445-3033 Fax       |
| Europe        | +44 (0) 1698 481481     |
|               | +44 (0) 1698 481676 Fax |
| Latin America | +1-305-805-8188         |
|               | +1-305-883-8257 Fax     |
| USA/Canada    | +1-800-537-6945         |
|               | +1-815-235-6847         |
|               | +1-815-235-6545 Fax     |

### **Automation and Control Solutions**

Sensing and Control

Honeywell

1985 Douglas Drive North

Minneapolis, MN 55422

[www.honeywell.com/sensing](http://www.honeywell.com/sensing)

005875-2-EN IL50 GLO Printed in USA  
November 2007

Copyright © 2007 Honeywell International Inc. All rights reserved.

# **Honeywell**



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331