

▶▶▶ Temperature/Process Controllers

The PXU series is the newest addition to the Red Lion PID controller portfolio, offering outstanding control in a small form-factor for industrial environments.

Available in 1/16, 1/8 and 1/4 DIN models, our PXU PID controllers accept a wide variety of thermocouple and RTD sensor inputs to meet varying application requirements. Featuring one of the industry's largest dual line 4-digit displays, the PXU allows for simultaneous viewing of temperature/process and setpoint values. The PXU also offers on demand auto-tuning for easy set up and provides two control outputs, which can be individually configured for reverse or direct applications using front panel push-button or Crimson® software.

With IP65 ingress protection, flush-mounting installation and easy-to-read displays, our robust PID controllers deliver the reliability and ease of use required for temperature and process control applications.



APPLICATIONS

- > Food & Beverage
- > Factory Automation
- > Manufacturing
- > Plastic Extrusion

PRODUCT HIGHLIGHTS

- > Full PID Control
- > Dual Relay Alarms
- > Universal Inputs (Temperature or Process)
- > UL Listed, 61010-1 Approved

FEATURES & BENEFITS

- > Universal Inputs
 - Thermocouple
 - RTD
 - 0-10 VDC
 - 4 – 20 mA (0 – 50 mA)
- > Full PID Control
 - On demand auto-tuning
 - Independently configured outputs
- > Easy Programming
 - Front panel push-button or Crimson software
- > AC or DC Powered Models
 - 100 to 240 VAC
 - 24 VDC
- > Reduced Case Depth
- > IP 65 Ingress Protection

▶▶▶ PXU PID Controller Specifications

DISPLAY PROPERTIES

LCD negative image transmissive with backlighting. Top (process) display with orange backlighting, bottom (parameter) display with green backlighting.
4 digits each line
1/4 DIN Model Digit Size: Line 1 - 0.87" (22 mm);
Line 2 - 0.55" (14 mm)
1/8 DIN Model Digit Size: Line 1 - 0.47" (12 mm);
Line 2 - 0.47" (12 mm)
1/16 DIN Model Digit Size: Line 1 - 0.43" (11 mm);
Line 2 - 0.27" (7.0 mm)

POWER CONNECTION

AC Power: 100 to 240 VAC -20/+8 %, 50/60 Hz, 5 VA
DC Power: 24 VDC, $\pm 10\%$, 5 W

INPUT CAPABILITIES

Temperature/RTD Indication Accuracy:
 $\pm (0.3\% \text{ of span, } +1^{\circ}\text{C}) \text{ at } 25^{\circ}\text{C}$
Thermocouple Inputs:
Types: T, E, J, K, R, S, B, N, L, U, and TXK
Resolution: 1° for types R, S, B and 1° or 0.1° for all other types
RTD Inputs:
Type: 2 or 3 wire
Excitation: 180 μA
Process Inputs:
0-5 or 0-10 VDC
0-20 or 4-20 mA
0-50 mV

COMMUNICATION

RS-485 Serial Communication (optional)

OUTPUTS

Time proportioning or DC Analog
Alarms: 2 relay alarm outputs.
Type: Form A or Form C, model and alarm dependent
Contact Rating: 3 A @ 250 VAC

CERTIFICATIONS & COMPLIANCES

CE Approved
EN 61326-1 Immunity to Industrial Locations
Emission CISPR 11 Class A
EN 61010-1
RoHS Compliant
UL Listed: File #E179259
IP65 Enclosure rating (Face only)

ENVIRONMENTAL

Operating Temperature Range: 0 to 50°C
Storage Temperature Range: -20 to 65°C
Operating and Storage Humidity: 80% max relative humidity (non-condensing) from 0°C to 50°C
Vibration Resistance: Operational 10 to 55 Hz, 1 g
Shock Resistance: Operational 30 g
Altitude: Up to 2000 meters

MECHANICAL

Construction: Black plastic alloy case and panel latch. Black plastic textured bezel with transparent display window. Controller meets IP65 requirements for indoor use when properly installed. Installation Category II, Pollution Degree 2.
Weight: 1/4 DIN: 11.0 oz (312 g)
1/8 DIN: 7.8 oz (221 g)
1/16 DIN: 5.3 oz (150 g)


ORDERING GUIDE

PART NUMBER	DIN SIZE	MAIN CONTROL	SECONDARY CONTROL	RS485 COMMS	USER INPUTS	POWER
PXU30020	1/16	4 to 20 mA	-	-	-	AC
PXU300B0	1/16	4 to 20 mA	-	-	-	DC
PXU309B0	1/16	4 to 20 mA	-	-	-	DC
PXU31A20	1/16	4 to 20 mA	Relay	Yes	Yes	AC
PXU31AB0	1/16	4 to 20 mA	Relay	Yes	Yes	DC
PXU11A20	1/16	Dual Relay Output	Relay	Yes	Yes	AC
PXU11AB0	1/16	Dual Relay Output	Relay	Yes	Yes	DC
PXU21A20	1/16	Logic/Relay	Relay	Yes	Yes	AC
PXU21AB0	1/16	Logic/Relay	Relay	Yes	Yes	DC
PXU10020	1/16	Relay Output	-	-	-	AC
PXU100B0	1/16	Relay Output	-	-	-	DC
PXU20020	1/16	Solid State Output	-	-	-	AC
PXU209B0	1/16	Solid State Output	-	-	-	DC
PXU31A30	1/8	4 to 20 mA	Relay	Yes	Yes	AC
PXU31AC0	1/8	4 to 20 mA	Relay	Yes	Yes	DC
PXU11A30	1/8	Dual Relay Output	Relay	Yes	Yes	AC
PXU11AC0	1/8	Dual Relay Output	Relay	Yes	Yes	DC
PXU21A30	1/8	Logic/Relay	Relay	Yes	Yes	AC
PXU21AC0	1/8	Logic/Relay	Relay	Yes	Yes	DC
PXU10030	1/8	Relay Output	-	-	-	AC
PXU100C0	1/8	Relay Output	-	-	-	DC
PXU20030	1/8	Solid State Output	-	-	-	AC
PXU31A50	1/4	4 to 20 mA	Relay	Yes	Yes	AC
PXU31AE0	1/4	4 to 20 mA	Relay	Yes	Yes	DC
PXU11A50	1/4	Dual Relay Output	Relay	Yes	Yes	AC
PXU11AE0	1/4	Dual Relay Output	Relay	Yes	Yes	DC


▶▶▶ PXU PID Controller Specifications

DIMENSIONS In inches (mm)


1/16 DIN

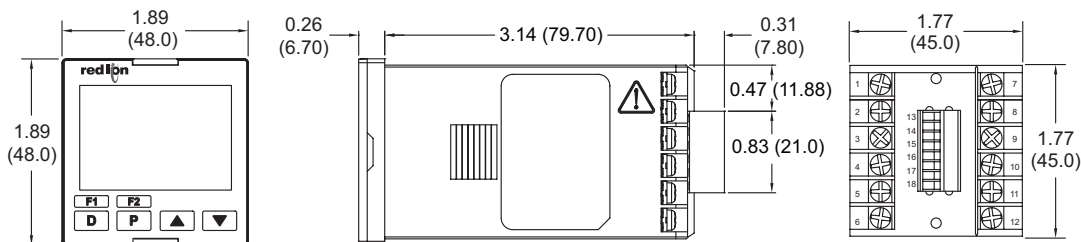

1/8 DIN

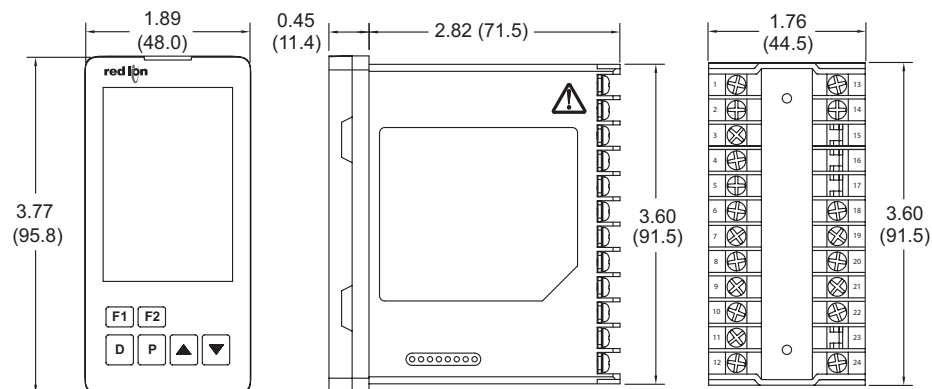

1/4 DIN

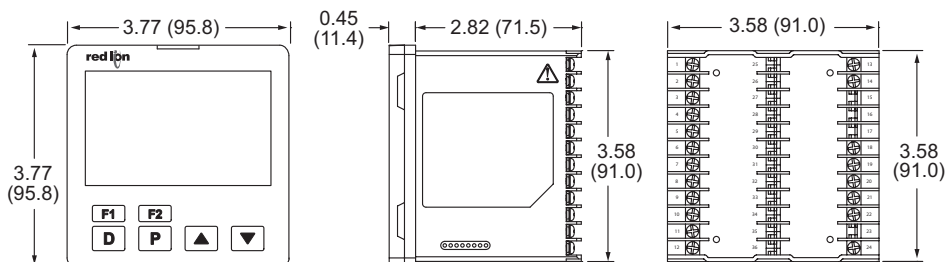

www.redlion.net

Connect. Monitor. Control.

Americas
sales@redlion.net

Asia-Pacific
asia@redlion.net

Europe
Middle East
Africa
europe@redlion.net

+1 (717) 767-6511

As the global experts in communication, monitoring and control for industrial automation and networking, Red Lion has been delivering innovative solutions for over forty years. Our automation, Ethernet and cellular M2M technology enables companies worldwide to gain real-time data visibility that drives productivity. Product brands include Red Lion, N-Tron and Sixnet. With headquarters in York, Pennsylvania, the company has offices across the Americas, Asia-Pacific and Europe. Red Lion is part of Spectris plc, the productivity-enhancing instrumentation and controls company. For more information, please visit www.redlion.net.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331