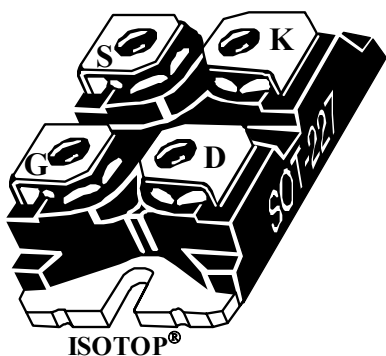
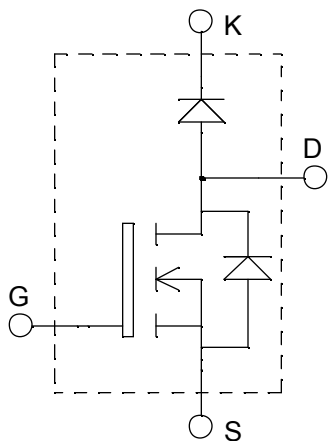


**ISOTOP<sup>®</sup> Boost chopper  
MOSFET Power Module**

$$V_{DSS} = 100V$$

$$R_{DSon} = 11m\Omega \text{ max @ } T_j = 25^{\circ}C$$

$$I_D = 142A \text{ @ } T_c = 25^{\circ}C$$


**Application**

- AC and DC motor control
- Switched Mode Power Supplies
- Power Factor Correction
- Brake switch

**Features**

- Power MOS V<sup>®</sup> MOSFETs
  - Low  $R_{DSon}$
  - Low input and Miller capacitance
  - Low gate charge
  - Fast intrinsic diode
  - Avalanche energy rated
  - Very rugged
- ISOTOP<sup>®</sup> Package (SOT-227)
- Very low stray inductance
- High level of integration

**Benefits**

- Outstanding performance at high frequency operation
- Direct mounting to heatsink (isolated package)
- Low junction to case thermal resistance
- Very rugged
- Low profile
- RoHS Compliant

**Absolute maximum ratings**

| Symbol        | Parameter                                         | Max ratings                        | Unit      |
|---------------|---------------------------------------------------|------------------------------------|-----------|
| $V_{DSS}$     | Drain - Source Breakdown Voltage                  | 100                                | V         |
| $I_D$         | Continuous Drain Current                          | $T_c = 25^{\circ}C$                | A         |
|               |                                                   | $T_c = 80^{\circ}C$                |           |
| $I_{DM}$      | Pulsed Drain current                              | 576                                |           |
| $V_{GS}$      | Gate - Source Voltage                             | $\pm 30$                           | V         |
| $R_{DSon}$    | Drain - Source ON Resistance                      | 11                                 | $m\Omega$ |
| $P_D$         | Maximum Power Dissipation                         | $T_c = 25^{\circ}C$                | W         |
| $I_{AR}$      | Avalanche current (repetitive and non repetitive) | 144                                | A         |
| $E_{AR}$      | Repetitive Avalanche Energy                       | 50                                 | mJ        |
| $E_{AS}$      | Single Pulse Avalanche Energy                     | 2500                               |           |
| $I_{F_{AV}}$  | Maximum Average Forward Current                   | Duty cycle=0.5 $T_c = 90^{\circ}C$ | A         |
| $I_{F_{RMS}}$ | RMS Forward Current (Square wave, 50% duty)       | 47                                 |           |

**CAUTION:** These Devices are sensitive to Electrostatic Discharge. Proper Handling Procedures Should Be Followed.

All ratings @  $T_j = 25^\circ\text{C}$  unless otherwise specified

**Electrical Characteristics**

| Symbol       | Characteristic                  | Test Conditions                                       | Min | Typ | Max       | Unit             |
|--------------|---------------------------------|-------------------------------------------------------|-----|-----|-----------|------------------|
| $I_{DSS}$    | Zero Gate Voltage Drain Current | $V_{GS} = 0V, V_{DS} = 100V$ $T_j = 25^\circ\text{C}$ |     |     | 250       | $\mu\text{A}$    |
|              |                                 | $V_{GS} = 0V, V_{DS} = 80V$ $T_j = 125^\circ\text{C}$ |     |     | 1000      |                  |
| $R_{DS(on)}$ | Drain – Source on Resistance    | $V_{GS} = 10V, I_D = 71A$                             |     |     | 11        | $\text{m}\Omega$ |
| $V_{GS(th)}$ | Gate Threshold Voltage          | $V_{GS} = V_{DS}, I_D = 2.5\text{mA}$                 | 2   |     | 4         | V                |
| $I_{GSS}$    | Gate – Source Leakage Current   | $V_{GS} = \pm 20V, V_{DS} = 0V$                       |     |     | $\pm 100$ | nA               |

**Dynamic Characteristics**


| Symbol       | Characteristic               | Test Conditions                                                                                 | Min | Typ  | Max | Unit |
|--------------|------------------------------|-------------------------------------------------------------------------------------------------|-----|------|-----|------|
| $C_{iss}$    | Input Capacitance            | $V_{GS} = 0V$<br>$V_{DS} = 25V$<br>$f = 1\text{MHz}$                                            |     | 8600 |     | pF   |
| $C_{oss}$    | Output Capacitance           |                                                                                                 |     | 3200 |     |      |
| $C_{rss}$    | Reverse Transfer Capacitance |                                                                                                 |     | 1180 |     |      |
| $Q_g$        | Total gate Charge            | $V_{GS} = 10V$<br>$V_{Bus} = 50V$<br>$I_D = 50A @ T_j = 25^\circ\text{C}$                       |     | 300  |     | nC   |
| $Q_{gs}$     | Gate – Source Charge         |                                                                                                 |     | 95   |     |      |
| $Q_{gd}$     | Gate – Drain Charge          |                                                                                                 |     | 110  |     |      |
| $T_{d(on)}$  | Turn-on Delay Time           | $V_{GS} = 15V$<br>$V_{Bus} = 50V$<br>$I_D = 142A @ T_j = 25^\circ\text{C}$<br>$R_G = 0.6\Omega$ |     | 16   |     | ns   |
| $T_r$        | Rise Time                    |                                                                                                 |     | 48   |     |      |
| $T_{d(off)}$ | Turn-off Delay Time          |                                                                                                 |     | 51   |     |      |
| $T_f$        | Fall Time                    |                                                                                                 |     | 9    |     |      |

**Chopper diode ratings and characteristics**

| Symbol           | Characteristic                   | Test Conditions                                                   |                        | Min | Typ | Max  | Unit |
|------------------|----------------------------------|-------------------------------------------------------------------|------------------------|-----|-----|------|------|
| V <sub>F</sub>   | Diode Forward Voltage            | I <sub>F</sub> = 30A                                              |                        |     | 1.1 | 1.15 | V    |
|                  |                                  | I <sub>F</sub> = 60A                                              |                        |     | 1.4 |      |      |
|                  |                                  | I <sub>F</sub> = 30A                                              | T <sub>j</sub> = 125°C |     | 0.9 |      |      |
| I <sub>RM</sub>  | Maximum Reverse Leakage Current  | V <sub>R</sub> = 200V                                             | T <sub>j</sub> = 25°C  |     |     | 250  | μA   |
|                  |                                  | V <sub>R</sub> = 200V                                             | T <sub>j</sub> = 125°C |     |     | 500  |      |
| C <sub>T</sub>   | Junction Capacitance             | V <sub>R</sub> = 200V                                             |                        |     | 94  |      | pF   |
| t <sub>rr</sub>  | Reverse Recovery Time            | I <sub>F</sub> =1A, V <sub>R</sub> =30V<br>di/dt =200A/μs         | T <sub>j</sub> = 25°C  |     | 21  |      | ns   |
|                  | Reverse Recovery Time            |                                                                   | T <sub>j</sub> = 25°C  |     | 24  |      |      |
|                  |                                  |                                                                   | T <sub>j</sub> = 125°C |     | 48  |      |      |
| I <sub>RRM</sub> | Maximum Reverse Recovery Current | I <sub>F</sub> = 30A<br>V <sub>R</sub> = 133 V<br>di/dt =200A/μs  | T <sub>j</sub> = 25°C  |     | 3   |      | A    |
|                  | T <sub>j</sub> = 125°C           |                                                                   |                        | 6   |     |      |      |
| Q <sub>rr</sub>  | Reverse Recovery Charge          |                                                                   | T <sub>j</sub> = 25°C  |     | 33  |      | nC   |
|                  |                                  |                                                                   | T <sub>j</sub> = 125°C |     | 150 |      |      |
| t <sub>rr</sub>  | Reverse Recovery Time            | I <sub>F</sub> = 30A<br>V <sub>R</sub> = 133 V<br>di/dt =1000A/μs | T <sub>j</sub> = 125°C |     | 31  |      | ns   |
| Q <sub>rr</sub>  | Reverse Recovery Charge          |                                                                   |                        |     | 335 |      | nC   |
| I <sub>RRM</sub> | Maximum Reverse Recovery Current |                                                                   |                        |     |     | 19   |      |

**Thermal and package characteristics**

| <i>Symbol</i>  | <i>Characteristic</i>                                                               |        | <i>Min</i> | <i>Typ</i> | <i>Max</i> | <i>Unit</i> |
|----------------|-------------------------------------------------------------------------------------|--------|------------|------------|------------|-------------|
| $R_{thJC}$     | Junction to Case Thermal Resistance                                                 | MOSFET |            |            | 0.28       | °C/W        |
|                |                                                                                     | Diode  |            |            | 1.21       |             |
| $R_{thJA}$     | Junction to Ambient (IGBT & Diode)                                                  |        |            |            | 20         |             |
| $V_{ISOL}$     | RMS Isolation Voltage, any terminal to case $t = 1$ min, $I_{isol} < 1$ mA, 50/60Hz |        | 2500       |            |            | V           |
| $T_J, T_{STG}$ | Storage Temperature Range                                                           |        | -55        |            | 150        | °C          |
| $T_L$          | Max Lead Temp for Soldering: 0.063" from case for 10 sec                            |        |            |            | 300        |             |
| Torque         | Mounting torque (Mounting = 8-32 or 4mm Machine and terminals = 4mm Machine)        |        |            |            | 1.5        | N.m         |
| Wt             | Package Weight                                                                      |        |            | 29.2       |            | g           |

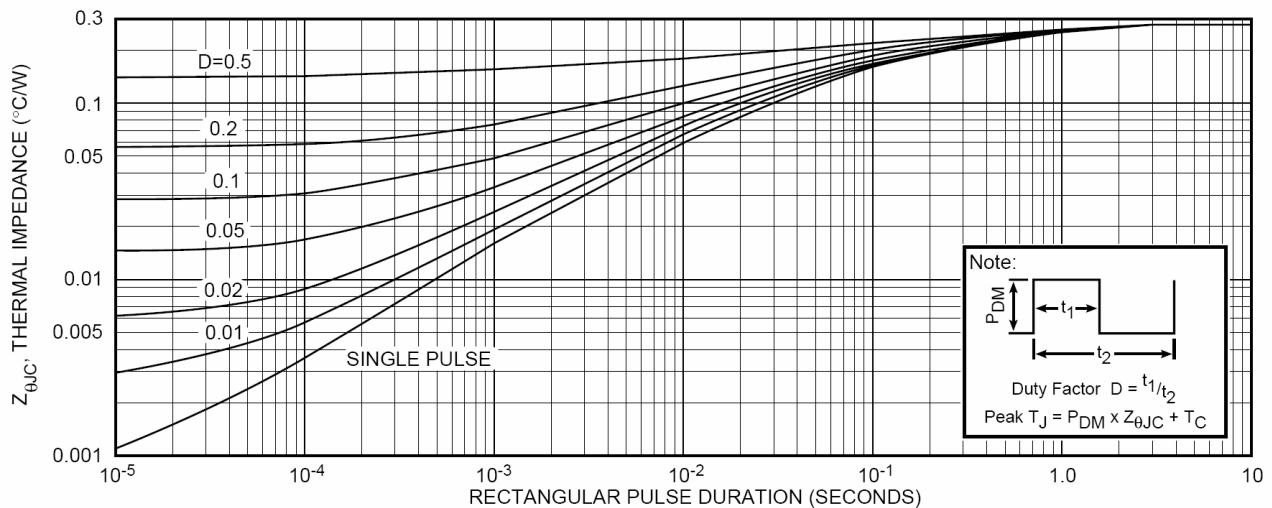**Typical MOSFET Performance Curve**


**FIGURE 1, MAXIMUM EFFECTIVE TRANSIENT THERMAL IMPEDANCE, JUNCTION-TO-CASE vs PULSE DURATION**

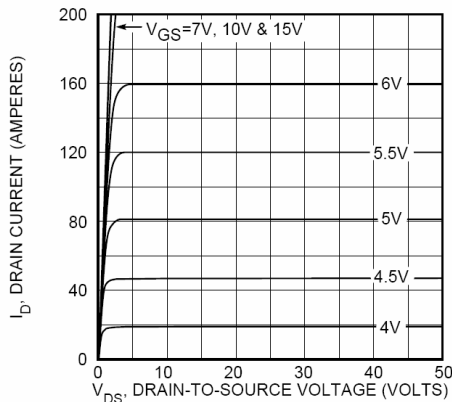


FIGURE 2, TYPICAL OUTPUT CHARACTERISTICS

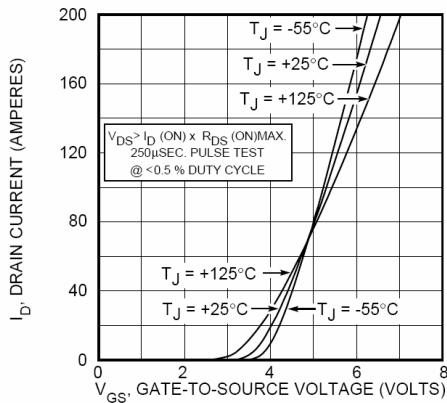


FIGURE 4, TYPICAL TRANSFER CHARACTERISTICS

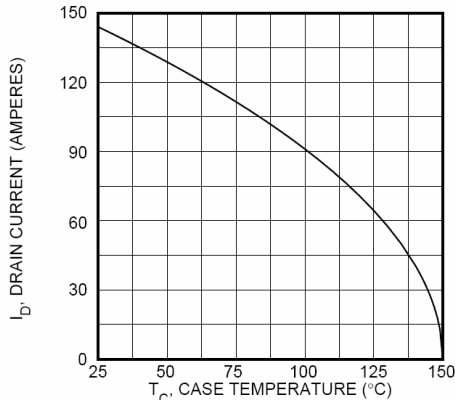


FIGURE 6, MAXIMUM DRAIN CURRENT vs CASE TEMPERATURE

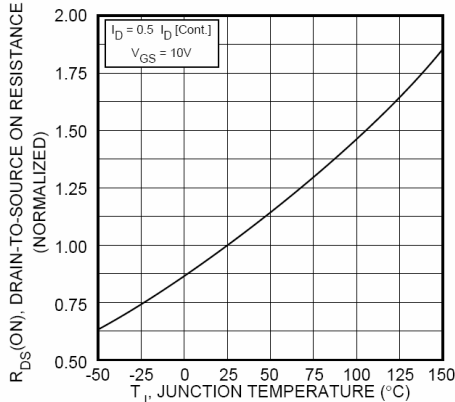


FIGURE 8, ON-RESISTANCE vs. TEMPERATURE

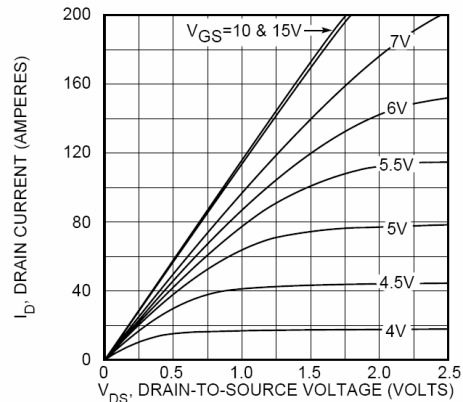


FIGURE 3, TYPICAL OUTPUT CHARACTERISTICS

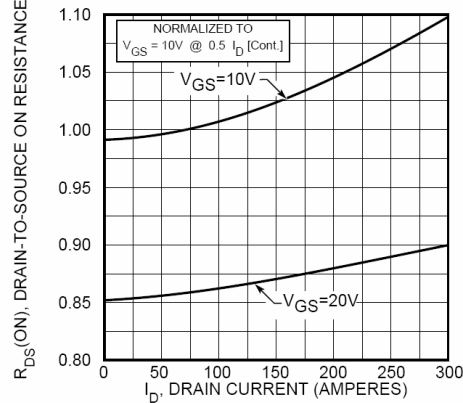


FIGURE 5,  $R_{DS(ON)}$  vs DRAIN CURRENT

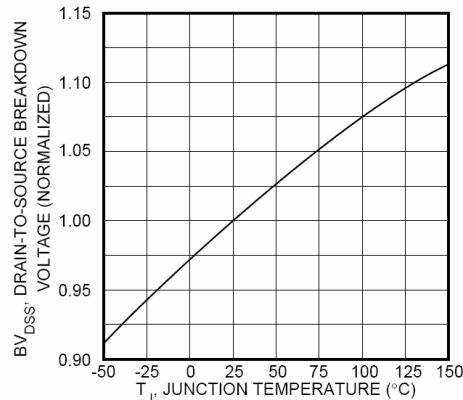


FIGURE 7, BREAKDOWN VOLTAGE vs TEMPERATURE

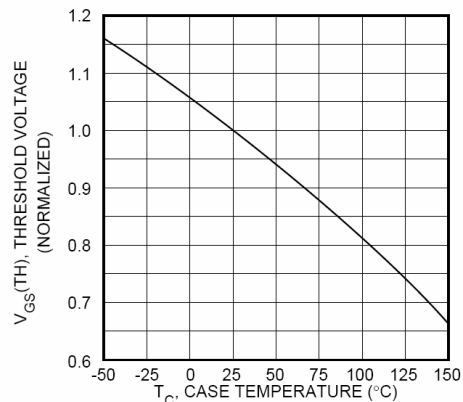


FIGURE 9, THRESHOLD VOLTAGE vs TEMPERATURE

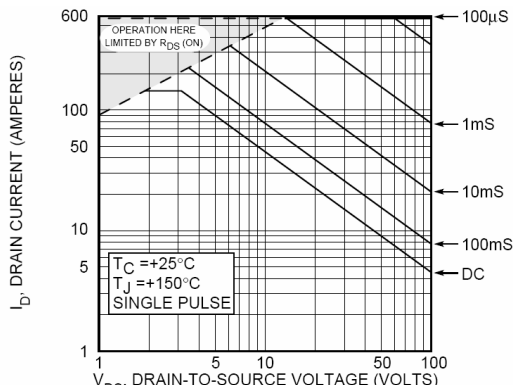


FIGURE 10, MAXIMUM SAFE OPERATING AREA

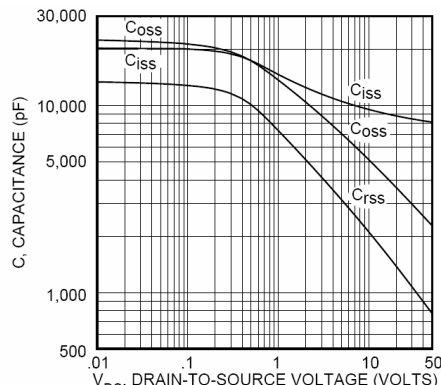


FIGURE 11, TYPICAL CAPACITANCE vs DRAIN-TO-SOURCE VOLTAGE

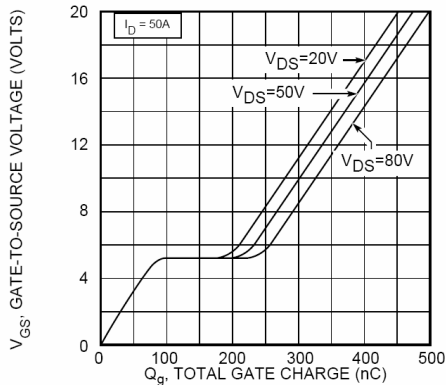


FIGURE 12, GATE CHARGES vs GATE-TO-SOURCE VOLTAGE

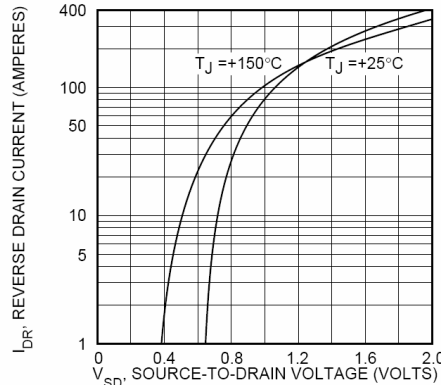


FIGURE 13, TYPICAL SOURCE-DRAIN DIODE FORWARD VOLTAGE

## Typical Diode Performance Curve

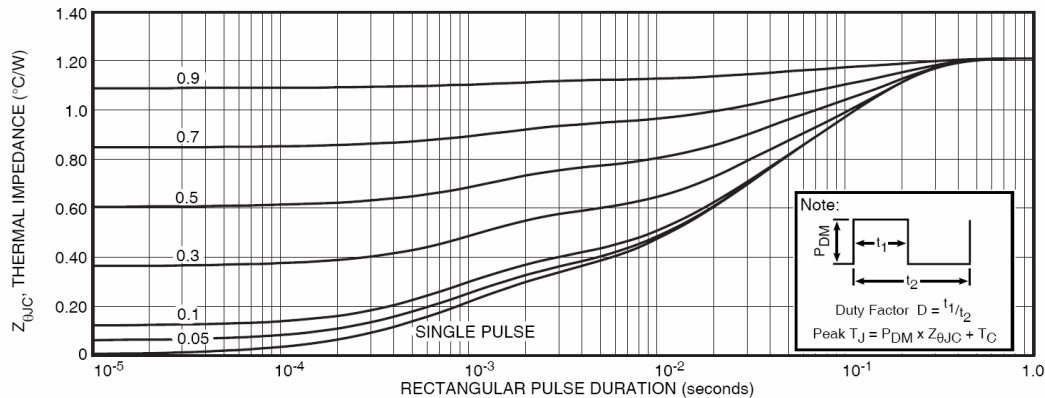


FIGURE 1a. MAXIMUM EFFECTIVE TRANSIENT THERMAL IMPEDANCE, JUNCTION-TO-CASE vs. PULSE DURATION

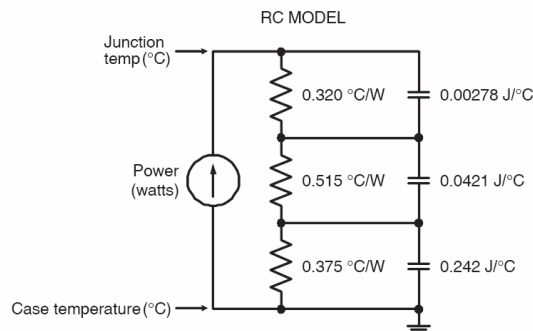


FIGURE 1b, TRANSIENT THERMAL IMPEDANCE MODEL

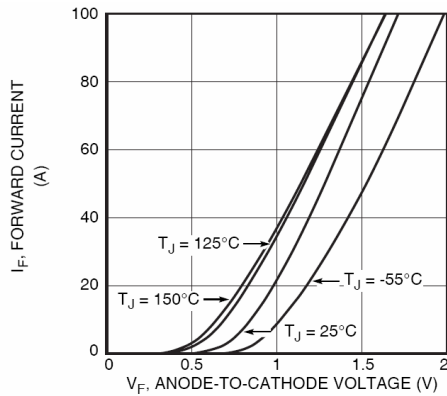


Figure 2. Forward Current vs. Forward Voltage

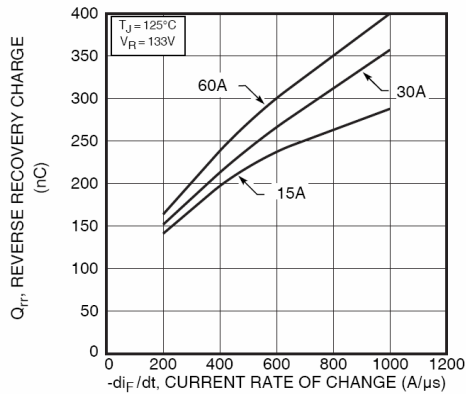


Figure 4. Reverse Recovery Charge vs. Current Rate of Change

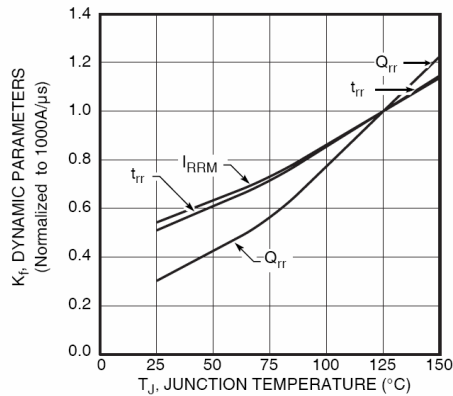


Figure 6. Dynamic Parameters vs. Junction Temperature

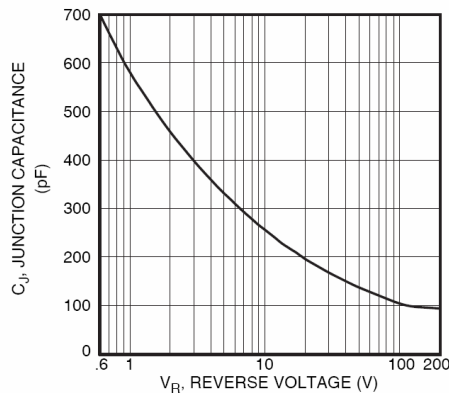


Figure 8. Junction Capacitance vs. Reverse Voltage

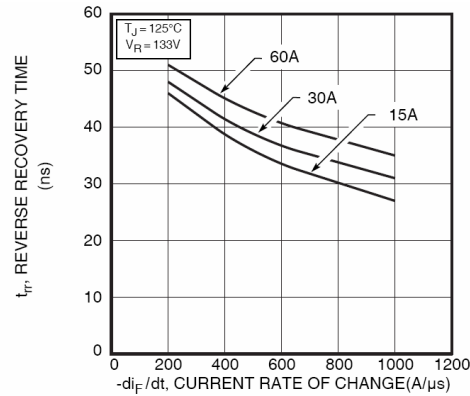


Figure 3. Reverse Recovery Time vs. Current Rate of Change

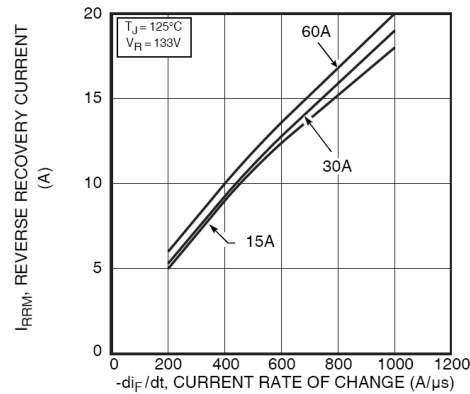


Figure 5. Reverse Recovery Current vs. Current Rate of Change

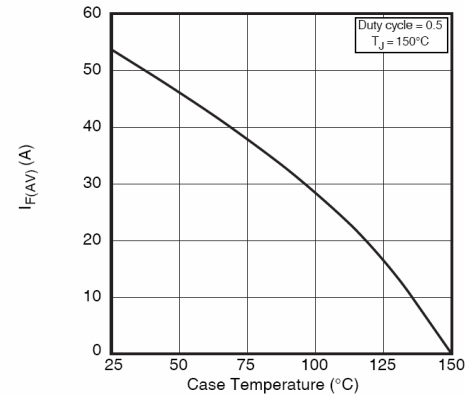


Figure 7. Maximum Average Forward Current vs. Case Temperature

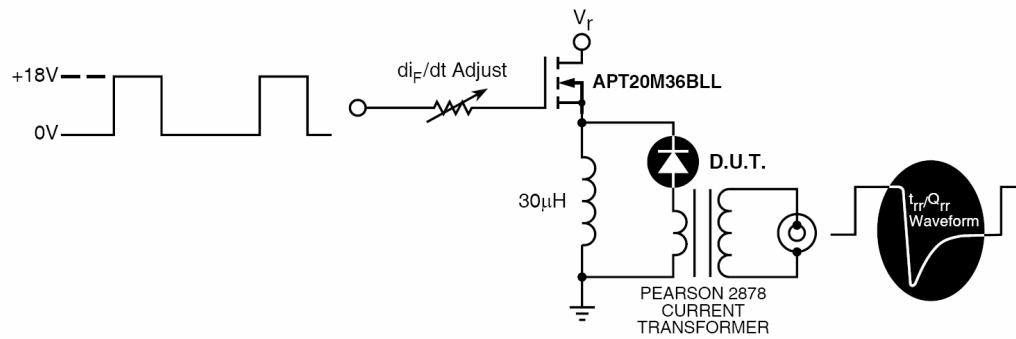


Figure 9. Diode Test Circuit

- 1  $I_F$  - Forward Conduction Current
- 2  $di_F/dt$  - Rate of Diode Current Change Through Zero Crossing.
- 3  $I_{RRM}$  - Maximum Reverse Recovery Current.
- 4  $t_{rr}$  - Reverse Recovery Time, measured from zero crossing where diode current goes from positive to negative, to the point at which the straight line through  $I_{RRM}$  and  $0.25 \cdot I_{RRM}$  passes through zero.
- 5  $Q_{rr}$  - Area Under the Curve Defined by  $I_{RRM}$  and  $t_{rr}$ .


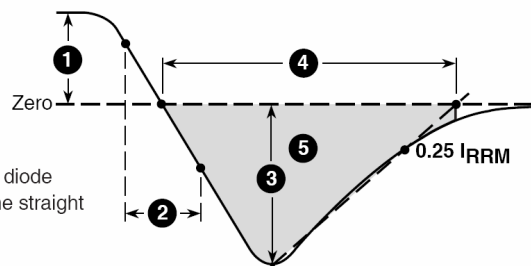


Figure 10, Diode Reverse Recovery Waveform and Definitions

## SOT-227 (ISOTOP®) Package Outline

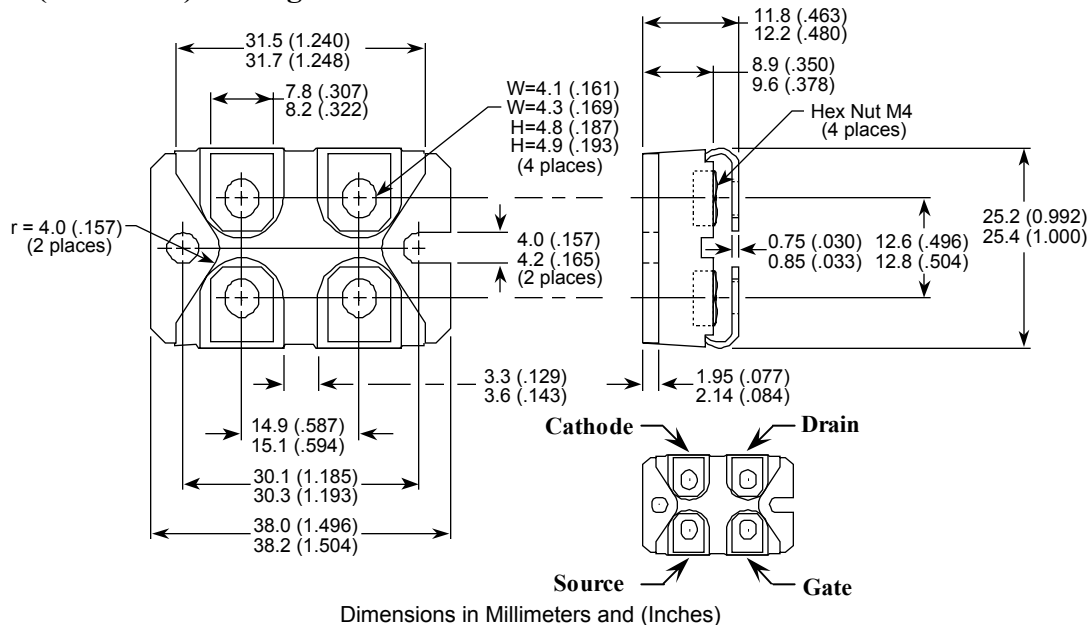

ISOTOP® is a registered trademark of ST Microelectronics NV

Microsemi reserves the right to change, without notice, the specifications and information contained herein

Microsemi's products are covered by one or more of U.S. patents 4,895,810 5,045,903 5,089,434 5,182,234 5,019,522 5,262,336 6,503,786 5,256,583 4,748,103 5,283,202 5,231,474 5,434,095 5,528,058 and foreign patents. U.S. and Foreign patents pending. All Rights Reserved.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331