



RDO Series

Precision compensated pressure sensors

FEATURES

- 0...10 mbar to 0...5 bar, 0...5 inch H₂O to 0...100 psi, differential, gage or absolute
- Temperature compensated
- Calibrated zero and span
- High impedance for low power applications
- Small DIP packages
- Sensortech PRO services

MEDIA COMPATIBILITY

To be used with non-corrosive, non-ionic working fluids such as clean dry air, dry gases and the like.




SPECIFICATIONS

Maximum ratings

Supply voltage V_s	+20 V _{DC}
Lead temperature (soldering 4 sec.)	250 °C
Temperature ranges	
Compensated	0 to 50 °C
Operating	-40 to 85 °C
Storage	-55 to 125 °C
Humidity limits (non-condensing)	0 to 100% RH
Common mode pressure	
all devices up to 25 mbar/10 "H ₂ O	50 psig
all others	150 psig

EQUIVALENT CIRCUIT

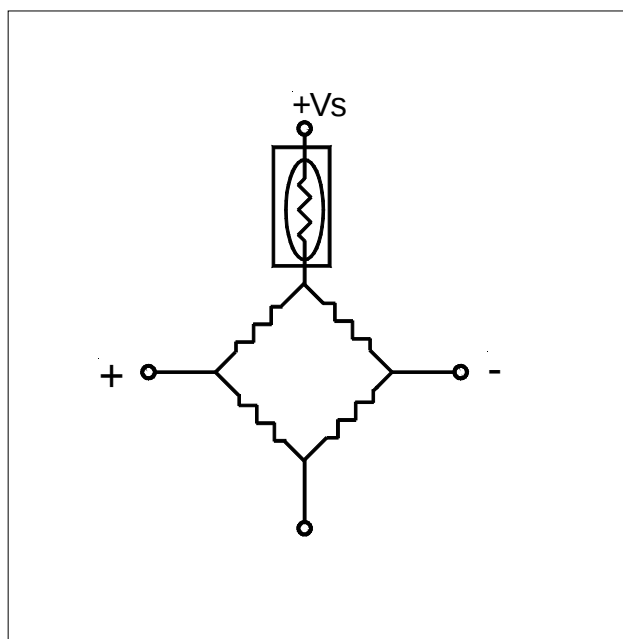



RDO Series

Precision compensated pressure sensors

PRESSURE RANGES SPECIFICATIONS¹

RDO...P (Prime Grade) devices

Part number	Operating pressure	Proof pressure ¹¹	Full-scale span ²		
			Min.	Typ.	Max.
RDOM050...P	0...50 mbar	1.4 bar	12.92 mV	13.05 mV	13.18 mV
RDOM100...P	0...100 mbar	1.4 bar	25.91 mV	26.17 mV	26.43 mV
RDOM250...P	0...250 mbar	1.4 bar	43.1 mV	43.5 mV	43.9 mV
RDOB001...P	0...1 bar	2.1 bar	86.2 mV	87.0 mV	87.9 mV
RDOB002...P	0...2 bar	4.2 bar	86.2 mV	87.0 mV	87.9 mV
RDOB005...P	0...5 bar	10.4 bar	71.8 mV	72.5 mV	73.2 mV
RDOP001...P	0...1 psi	20 psi	17.82 mV	18.0 mV	18.18 mV
RDOP005...P	0...5 psi	20 psi	59.40 mV	60.0 mV	60.60 mV
RDOP015...P	0...15 psi	30 psi	89.10 mV	90.0 mV	90.90 mV
RDOP030...P	0...30 psi	60 psi	89.10 mV	90.0 mV	90.90 mV
RDOP100...P	0...100 psi	150 psi	99.00 mV	100.0 mV	101.0 mV

RDO...H (High Grade) devices

Part number	Operating pressure	Proof pressure ¹¹	Full-scale span ²		
			Min.	Typ.	Max.
RDOM010...H	0...10 mbar	250 mbar	15.7 mV	16.1 mV	16.5 mV
RDOM025...H	0...25 mbar	250 mbar	24.6 mV	25.1 mV	25.6 mV
RDOM050...H	0...50 mbar	1.4 bar	12.5 mV	13.0 mV	13.5 mV
RDOM100...H	0...100 mbar	1.4 bar	25.2 mV	26.1 mV	27.0 mV
RDOM250...H	0...250 mbar	1.4 bar	42.0 mV	43.5 mV	45.0 mV
RDOB001...H	0...1 bar	2.1 bar	84.0 mV	87.0 mV	90.0 mV
RDOB002...H	0...2 bar	4.2 bar	84.0 mV	87.0 mV	90.0 mV
RDOB005...H	0...5 bar	10.4 bar	70.0 mV	72.5 mV	75.0 mV
RDOH005...H	0...5 inch H ₂ O	200 inch H ₂ O	19.5 mV	20.0 mV	20.5 mV
RDOH010...H	0...10 inch H ₂ O	200 inch H ₂ O	24.5 mV	25.0 mV	25.5 mV
RDOP001...H	0...1 psi	20 psi	17.37 mV	18 mV	18.63 mV
RDOP005...H	0...5 psi	20 psi	57.90 mV	60 mV	62.10 mV
RDOP015...H	0...15 psi	30 psi	86.85 mV	90 mV	93.15 mV
RDOP030...H	0...30 psi	60 psi	86.85 mV	90 mV	93.15 mV
RDOP100...H	0...100 psi	150 psi	96.50 mV	100 mV	103.5 mV



RDO Series

Precision compensated pressure sensors

PERFORMANCE CHARACTERISTICS¹

Characteristics		Min.	Typ.	Max.	Unit
Zero pressure offset	all RDO...D4P and RDO...G2P devices	-0.25	0	+0.25	mV
	all RDO...A2P devices ¹²	-0.30	0	+0.30	
	all devices up to 25 mbar/10 "H ₂ O	-0.75	0	+0.75	
	all RDO...A2H devices ¹²	-1.00	0	+1.00	
	all other devices	-0.50	0	+0.50	
Combined linearity and hysteresis ³					%FSO
			±0.1	±0.25	
			±0.2	±1.00	
Temperature effects (0 to 50°C) ⁴					mV
Offset	all RDO...P devices		±0.2	±0.5	
	all devices up to 25 mbar/10 "H ₂ O		±0.2	±0.6	
	all other devices		±0.2	±1.0	
Span	all RDO...P		±0.4	±1.0	%FSO
	all other devices		±0.4	±2.0	
Repeatability ⁵	all devices up to 25 mbar/10 "H ₂ O		±0.5		%FSO
	all other devices		±0.2	±0.5	
Input impedance ⁶			4.0		kΩ
Output impedance ⁷			4.0		
Common mode voltage ⁸		1.5	3.0	5.0	V _{DC}
Response time ⁹			100		μsec
Long term stability of offset and span ¹⁰			±0.1		mV

Specification notes:

- Reference conditions: supply voltage, $V_s = 12V_{DC}$; $T_A = 25^\circ C$; common mode line pressure = 0 bar; pressure applied to port 2. For absolute devices only, pressure is applied to port 1 and the output polarity is reversed.
- Span is the algebraic difference between the output voltage at full scale pressure and the output at zero pressure. Span is ratiometric to the supply voltage.
- Hysteresis is the maximum output difference at any point within the operating pressure range for increasing and decreasing pressure. Maximum linearity and hysteresis for the RDOM250...P is 0.35 %FSO and for the RDOP005...P is 0.5 %FSO.
- Maximum error band of the offset voltage and the error band of the span, relative to the 25°C reading.
- Maximum difference in output at any pressure within the operating pressure range and temperature within 0 to +50°C after:
 - 100 temperature cycles, 0 to +50°C.
 - 1.0 million pressure cycles, 0 psi to full scale span.
- Input impedance is the impedance between V_s and ground.
- Output impedance is the impedance between + and - outputs.
- This is the common mode voltage of the output arms for $V_s = 12 V_{DC}$.
- Response time for a zero to full scale span pressure step change, 10 to 90 % rise time.
- Long term stability over a one year period.
- If the maximum pressure is exceeded, even momentarily, the package may leak or burst, or the pressure sensing die may fracture. The proof pressure for the forward gage of all devices in the D4-package is the specified value or 7 bar/100 psi, whatever is less.
- Absolute devices with improved zero pressure offset values are available on request. Please contact your nearest Sensortekhnics sales office for further information.







RDO Series

Precision compensated pressure sensors

PHYSICAL DIMENSIONS

RDO...G2...,
RDO...A2...


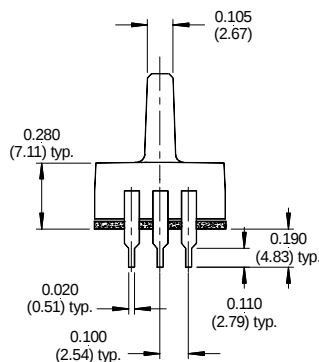




third angle projection

dimensions in inches (mm)

mass: 2 g

RDO...D4...

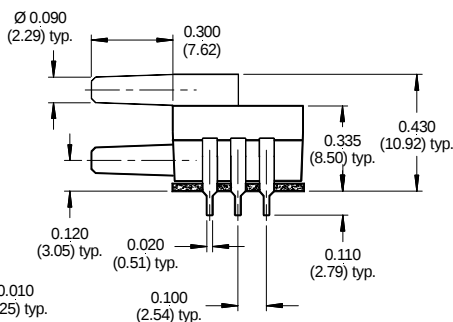

third angle projection


dimensions in inches (mm)

mass: 2 g


ELECTRICAL CONNECTION

Top View


RDO...G2...



RDO...A2...



RDO...D4...



Note: The polarity indicated is for pressure applied to
RDO...G2..., RDO...D4... : P2 (backward gage), RDO...A2... : P1 (forward gage)



RDO Series

Precision compensated pressure sensors

ORDERING INFORMATION - AVAILABLE LISTINGS

Note: RDO...P = Prime Grade,
RDO...H = High Grade

Pressure range	Pressure mode		
	Absolute	Gage	Differential/Gage
10 mbar		RDOM010G2H	RDOM010D4H
25 mbar		RDOM025G2H	RDOM025D4(P,H)
50 mbar		RDOM050G2P	RDOM050D4(P,H)
100 mbar		RDOM100G2(P,H)	RDOM100D4(P,H)
250 mbar		RDOM250G2(P,H)	RDOM250D4(P,H)
1 bar	RDOB001A2(P,H)	RDOB001G2(P,H)	RDOB001D4(P,H)
2 bar	RDOB002A2(P,H)	RDOB002G2(P,H)	RDOB002D4H
5 bar	RDOB005A2(P,H)	RDOB005G2(P,H)	RDOB005D4(P,H)
5 "H ₂ O			RDOH005D4H
10 "H ₂ O			RDOH010D4H
1 psi			RDOP001D4(P,H)
5 psi	RDOP015A2(P,H)	RDOP001G2(P,H)	RDOP001D4(P,H)
15 psi		RDOP005G2(P,H)	RDOP005D4(P,H)
30 psi		RDOP015G2(P,H)	RDOP015D4(P,H)
100 psi		RDOP030G2(P,H)	RDOP030D4H
	RDOP100A2(P,H)	RDOP100G2(P,H)	RDOP100D4(P,H)

Sensorteknics PRO services:

- Extended guarantee period of 2 years
- Improved performance characteristics
- Custom product modifications and adaptations even for small quantities
- Advanced logistics models for supply inventory and short delivery times
- Technical support through application engineers on the phone or at your site
- Fastest possible technical response for design and QA engineers
- ... plus other services on request

Sensorteknics reserves the right to make changes to any products herein. Sensorteknics does not assume any liability arising out of the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331