



NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED



THIS PAGE INTENTIONALLY LEFT BLANK

GaAs HEMT MMIC 0.5 WATT POWER AMPLIFIER, 27 - 31.5 GHz

Typical Applications


This HMC-APH460 is ideal for:

- Point-to-Point Radios
- Point-to-Multi-Point Radios
- VSAT
- Military & Space

Features

Output IP3: +37 dBm
P1dB: +28 dBm
Gain: 14 dB
Supply Voltage: +5V
50 Ohm Matched Input/Output
Die Size: 3.10 x 1.26 x 0.1 mm

Functional Diagram

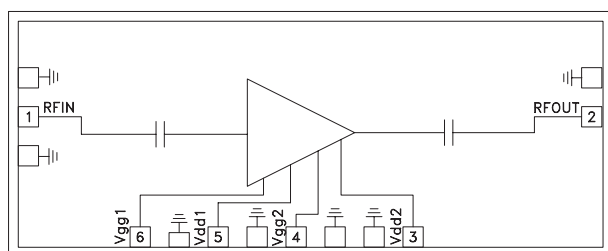

General Description

The HMC-APH460 is a two stage GaAs HEMT MMIC 0.5 Watt Power Amplifier which operates between 27 and 31.5 GHz. The HMC-APH460 provides 14 dB of gain, and an output power of +28 dBm at 1 dB compression from a +5V supply voltage. All bond pads and the die backside are Ti/Au metallized and the amplifier device is fully passivated for reliable operation. The HMC-APH460 GaAs HEMT MMIC 0.5 Watt Power Amplifier is compatible with conventional die attach methods, as well as thermo-compression and thermosonic wirebonding, making it ideal for MCM and hybrid microcircuit applications. All data Shown herein is measured with the chip in a 50 Ohm environment and contacted with RF probes.

Electrical Specifications^[1], $T_A = +25^\circ \text{C}$, $V_{dd1} = V_{dd2} = 5\text{V}$, $I_{dd1} + I_{dd2} = 900 \text{ mA}$ ^[2]


Parameter	Min.	Typ.	Max.	Units
Frequency Range	27 - 31.5			GHz
Gain	12	14		dB
Input Return Loss		7		dB
Output Return Loss		10		dB
Output power for 1dB Compression (P1dB)		28		dBm
Output Third Order Intercept (IP3)		37		dBm
Saturated Output Power (Psat)		30		dBm
Supply Current (Idd1+Idd2)		900		mA

[1] Unless otherwise indicated, all measurements are from probed die


[2] Adjust Vgg1=Vgg2 between -1V to +0.3V (typ -0.5V) to achieve Idd1 = 300 mA, Idd2 = 600 mA

GaAs HEMT MMIC 0.5 WATT POWER AMPLIFIER, 27 - 31.5 GHz


Linear Gain vs. Frequency

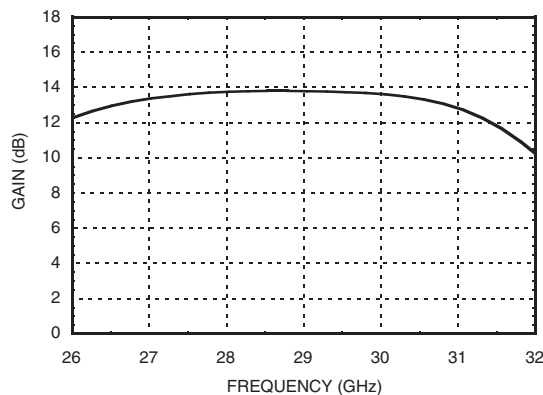


Fixtured Pout vs. Frequency

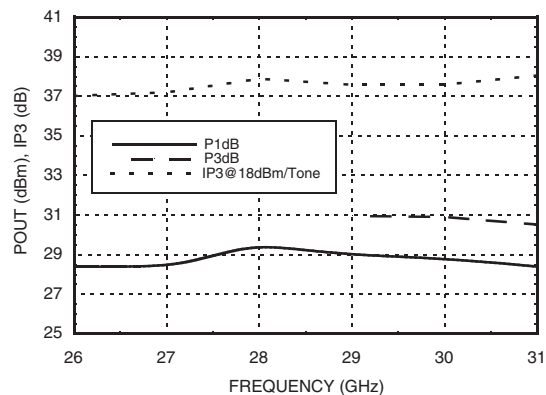


Input Return Loss vs. Frequency

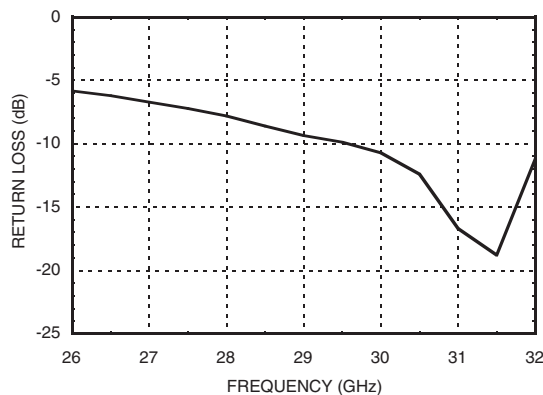

Output Return Loss vs. Frequency

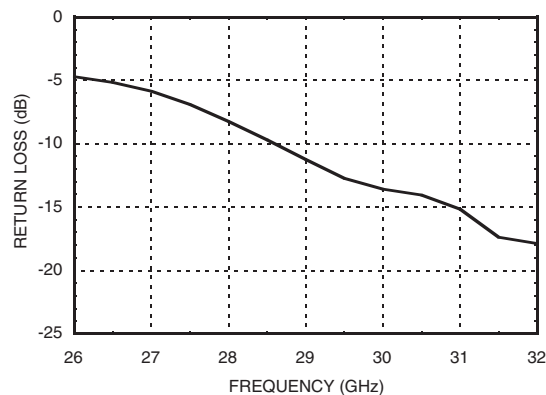

Wideband Linear Gain vs. Frequency

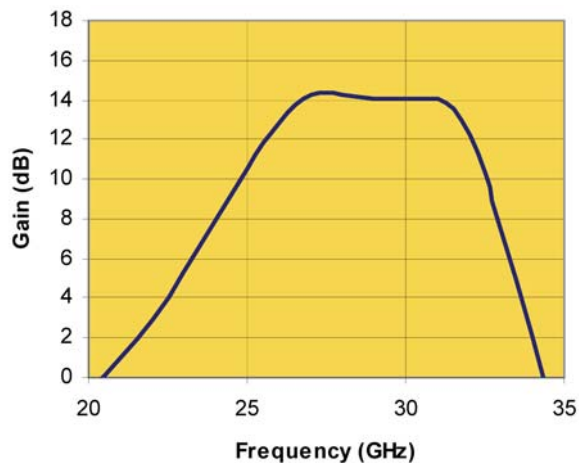

Drain Bias Voltage	+5.5 Vdc
Gate Bias Voltage	-1 to +0.3 Vdc
RF Input Power	20 dBm
Thermal Resistance Channel to Die Bottom	69.7 °C/W
Storage Temperature	-65 °C to + 150 °C
Die Bottom Temperature for MTTF of 10 ⁶ Hours	33 °C *
Die Bottom Temperature for MTTF of 10 ⁵ Hours	63 °C *

Figure 1 is a schematic diagram of the test specimen, showing dimensions and feature locations. The diagram includes a top view and a side view.

Top View Dimensions:






- Overall width: .0079" [0.200]
- Overall height: .0496" [1.260]
- Feature 1: .0079" [0.200]
- Feature 2: .0079" [0.200]
- Feature 3: .0164" [0.417]
- Feature 4: .0079" [0.200]
- Feature 5: .0079" [0.200]
- Feature 6: .0079" [0.200]
- Feature 7: .0079" [0.200]
- Feature 8: .0079" [0.200]
- Feature 9: .0079" [0.200]
- Feature 10: .0079" [0.200]
- Feature 11: .0079" [0.200]
- Feature 12: .0079" [0.200]
- Feature 13: .0079" [0.200]
- Feature 14: .0079" [0.200]
- Feature 15: .0079" [0.200]
- Feature 16: .0079" [0.200]
- Feature 17: .0079" [0.200]
- Feature 18: .0079" [0.200]
- Feature 19: .0079" [0.200]
- Feature 20: .0079" [0.200]
- Feature 21: .0079" [0.200]
- Feature 22: .0079" [0.200]
- Feature 23: .0079" [0.200]
- Feature 24: .0079" [0.200]
- Feature 25: .0079" [0.200]
- Feature 26: .0079" [0.200]
- Feature 27: .0079" [0.200]
- Feature 28: .0079" [0.200]
- Feature 29: .0079" [0.200]
- Feature 30: .0079" [0.200]
- Feature 31: .0079" [0.200]
- Feature 32: .0079" [0.200]
- Feature 33: .0079" [0.200]
- Feature 34: .0079" [0.200]
- Feature 35: .0079" [0.200]
- Feature 36: .0079" [0.200]
- Feature 37: .0079" [0.200]
- Feature 38: .0079" [0.200]
- Feature 39: .0079" [0.200]
- Feature 40: .0079" [0.200]
- Feature 41: .0079" [0.200]
- Feature 42: .0079" [0.200]
- Feature 43: .0079" [0.200]
- Feature 44: .0079" [0.200]
- Feature 45: .0079" [0.200]
- Feature 46: .0079" [0.200]
- Feature 47: .0079" [0.200]
- Feature 48: .0079" [0.200]
- Feature 49: .0079" [0.200]
- Feature 50: .0079" [0.200]
- Feature 51: .0079" [0.200]
- Feature 52: .0079" [0.200]
- Feature 53: .0079" [0.200]
- Feature 54: .0079" [0.200]
- Feature 55: .0079" [0.200]
- Feature 56: .0079" [0.200]
- Feature 57: .0079" [0.200]
- Feature 58: .0079" [0.200]
- Feature 59: .0079" [0.200]
- Feature 60: .0079" [0.200]
- Feature 61: .0079" [0.200]
- Feature 62: .0079" [0.200]
- Feature 63: .0079" [0.200]
- Feature 64: .0079" [0.200]
- Feature 65: .0079" [0.200]
- Feature 66: .0079" [0.200]
- Feature 67: .0079" [0.200]
- Feature 68: .0079" [0.200]
- Feature 69: .0079" [0.200]
- Feature 70: .0079" [0.200]
- Feature 71: .0079" [0.200]
- Feature 72: .0079" [0.200]
- Feature 73: .0079" [0.200]
- Feature 74: .0079" [0.200]
- Feature 75: .0079" [0.200]
- Feature 76: .0079" [0.200]
- Feature 77: .0079" [0.200]
- Feature 78: .0079" [0.200]
- Feature 79: .0079" [0.200]
- Feature 80: .0079" [0.200]
- Feature 81: .0079" [0.200]
- Feature 82: .0079" [0.200]
- Feature 83: .0079" [0.200]
- Feature 84: .0079" [0.200]
- Feature 85: .0079" [0.200]
- Feature 86: .0079" [0.200]
- Feature 87: .0079" [0.200]
- Feature 88: .0079" [0.200]
- Feature 89: .0079" [0.200]
- Feature 90: .0079" [0.200]
- Feature 91: .0079" [0.200]
- Feature 92: .0079" [0.200]
- Feature 93: .0079" [0.200]
- Feature 94: .0079" [0.200]
- Feature 95: .0079" [0.200]
- Feature 96: .0079" [0.200]
- Feature 97: .0079" [0.200]
- Feature 98: .0079" [0.200]
- Feature 99: .0079" [0.200]
- Feature 100: .0079" [0.200]
- Feature 101: .0079" [0.200]
- Feature 102: .0079" [0.200]
- Feature 103: .0079" [0.200]
- Feature 104: .0079" [0.200]
- Feature 105: .0079" [0.200]
- Feature 106: .0079" [0.200]
- Feature 107: .0079" [0.200]
- Feature 108: .0079" [0.200]
- Feature 109: .0079" [0.200]
- Feature 110: .0079" [0.200]
- Feature 111: .0079" [0.200]
- Feature 112: .0079" [0.200]
- Feature 113: .0079" [0.200]
- Feature 114: .0079" [0.200]
- Feature 115: .0079" [0.200]
- Feature 116: .0079" [0.200]
- Feature 117: .0079" [0.200]
- Feature 118: .0079" [0.200]
- Feature 119: .0079" [0.200]
- Feature 120: .0079" [0.200]
- Feature 121: .0079" [0.200]
- Feature 122: .0079" [0.200]
- Feature 123: .0079" [0.200]
- Feature 124: .0079" [0.200]
- Feature 125: .0079" [0.200]
- Feature 126: .0079" [0.200]
- Feature 127: .0079" [0.200]
- Feature 128: .0079" [0.200]
- Feature 129: .0079" [0.200]
- Feature 130: .0079" [0.200]
- Feature 131: .0079" [0.200]
- Feature 132: .0079" [0.200]
- Feature 133: .0079" [0.200]
- Feature 134: .0079" [0.200]
- Feature 135: .0079" [0.200]
- Feature 136: .0079" [0.200]
- Feature 137: .0079" [0.200]
- Feature 138: .0079" [0.200]
- Feature 139: .0079" [0.200]
- Feature 140: .0079" [0.200]
- Feature 141: .0079" [0.200]
- Feature 142: .0079" [0.200]
- Feature 143: .0079" [0.200]
- Feature 144: .0079" [0.200]
- Feature 145: .0079" [0.200]
- Feature 146: .0079" [0.200]
- Feature 147: .0079" [0.200]
- Feature 148: .0079" [0.200]
- Feature 149: .0079" [0.200]
- Feature 150: .0079" [0.200]
- Feature 151: .0079" [0.200]
- Feature 152: .0079" [0.200]
- Feature 153: .0079" [0.200]
- Feature 154: .0079" [0.200]
- Feature 155: .0079" [0.200]
- Feature 156: .0079" [0.200]
- Feature 157: .0079" [0.200]
- Feature 158: .0079" [0.200]
- Feature 159: .0079" [0.200]
- Feature 160: .0079" [0.200]
- Feature 161: .0079" [0.200]
- Feature 162: .0079" [0.200]
- Feature 163: .0079" [0.200]
- Feature 164: .0079" [0.200]
- Feature 165: .0079" [0.200]
- Feature 166: .0079" [0.200]
- Feature 167: .0079" [0.200]
- Feature 168: .0079" [0.200]</

Standard	Alternate
GP-2 (Gel Pack)	[2]

1. ALL DIMENSIONS ARE IN INCHES [MM].
2. TYPICAL BOND PAD IS .004" SQUARE.
3. BACKSIDE METALLIZATION: GOLD.
4. BACKSIDE METAL IS GROUND.
5. BOND PAD METALLIZATION: GOLD.
6. CONNECTION NOT REQUIRED FOR UNLABELED BOND PADS.
7. OVERALL DIE SIZE $\pm .002"$


GaAs HEMT MMIC 0.5 WATT POWER AMPLIFIER, 27 - 31.5 GHz

Pad Descriptions

Pad Number	Function	Description	Interface Schematic
1	RFIN	This pad is AC coupled and matched to 50 Ohms.	
2	RFOUT	This pad is AC coupled and matched to 50 Ohms.	
3	Vdd1	Power Supply Voltage for the amplifier. See assembly for required external components.	
5	Vdd2	Power Supply Voltage for the amplifier. See assembly for required external components.	
4, 6	Vgg1, Vgg2	Gate control for amplifier. Please follow "MMIC Amplifier Biasing Procedure" application note. See assembly for required external components.	
Die Bottom	GND	Die bottom must be connected to RF/DC ground.	

GaAs HEMT MMIC 0.5 WATT POWER AMPLIFIER, 27 - 31.5 GHz

Assembly Diagram

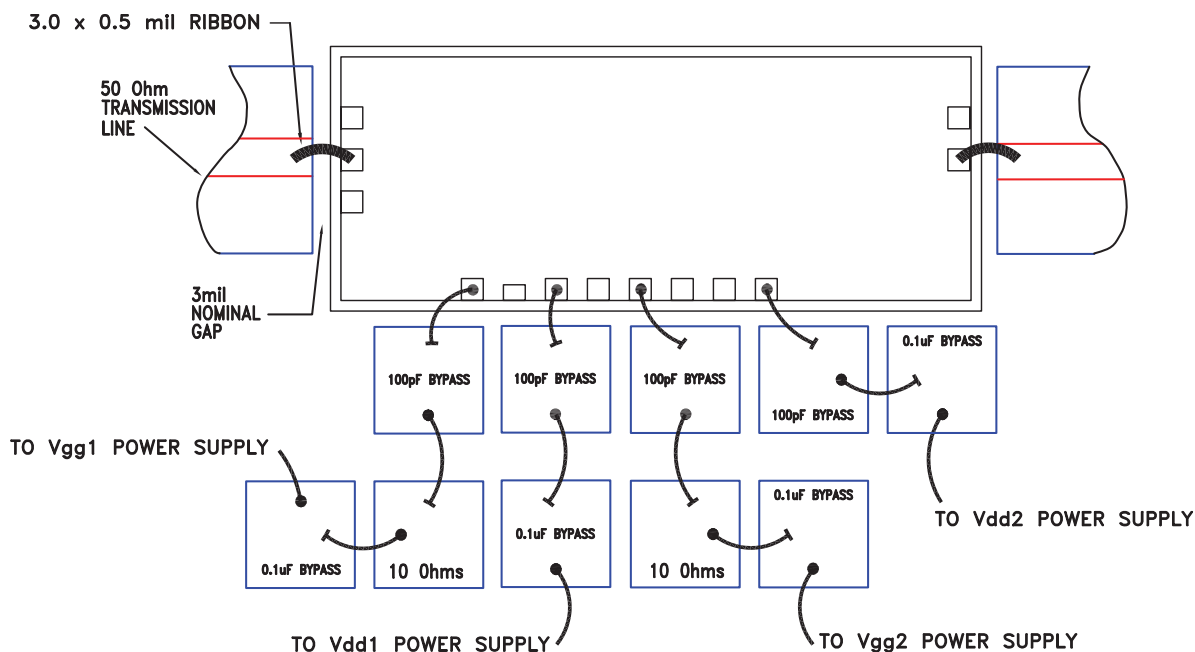

Note 1: Bypass caps should be 100 pF (approximately) ceramic (single-layer) placed no farther than 30 mils from the amplifier.
Note 2: Best performance obtained from use of <10 mil (long) by 3 by 0.5mil ribbons on input and output.

**GaAs HEMT MMIC 0.5 WATT POWER
AMPLIFIER, 27 - 31.5 GHz**

Mounting & Bonding Techniques for Millimeterwave GaAs MMICs

The die should be attached directly to the ground plane eutectically or with conductive epoxy (see HMC general Handling, Mounting, Bonding Note).

50 Ohm Microstrip transmission lines on 0.127mm (5 mil) thick alumina thin film substrates are recommended for bringing RF to and from the chip (Figure 1). If 0.254mm (10 mil) thick alumina thin film substrates must be used, the die should be raised 0.150mm (6 mils) so that the surface of the die is coplanar with the surface of the substrate. One way to accomplish this is to attach the 0.102mm (4 mil) thick die to a 0.150mm (6 mil) thick molybdenum heat spreader (moly-tab) which is then attached to the ground plane (Figure 2).

Microstrip substrates should be placed as close to the die as possible in order to minimize bond wire length. Typical die-to-substrate spacing is 0.076mm to 0.152 mm (3 to 6 mils).

Handling Precautions

Follow these precautions to avoid permanent damage.

Storage: All bare die are placed in either Waffle or Gel based ESD protective containers, and then sealed in an ESD protective bag for shipment. Once the sealed ESD protective bag has been opened, all die should be stored in a dry nitrogen environment.

Cleanliness: Handle the chips in a clean environment. DO NOT attempt to clean the chip using liquid cleaning systems.

Static Sensitivity: Follow ESD precautions to protect against ESD strikes.

Transients: Suppress instrument and bias supply transients while bias is applied. Use shielded signal and bias cables to minimize inductive pick-up.

General Handling: Handle the chip along the edges with a vacuum collet or with a sharp pair of bent tweezers. The surface of the chip may have fragile air bridges and should not be touched with vacuum collet, tweezers, or fingers.

Mounting



The chip is back-metallized and can be die mounted with AuSn eutectic preforms or with electrically conductive epoxy. The mounting surface should be clean and flat.

Eutectic Die Attach: A 80/20 gold tin preform is recommended with a work surface temperature of 255 °C and a tool temperature of 265 °C. When hot 90/10 nitrogen/hydrogen gas is applied, tool tip temperature should be 290 °C. DO NOT expose the chip to a temperature greater than 320 °C for more than 20 seconds. No more than 3 seconds of scrubbing should be required for attachment.

Epoxy Die Attach: Apply a minimum amount of epoxy to the mounting surface so that a thin epoxy fillet is observed around the perimeter of the chip once it is placed into position. Cure epoxy per the manufacturer's schedule.

Wire Bonding

RF bonds made with 0.003" x 0.0005" ribbon are recommended. These bonds should be thermosonically bonded with a force of 40-60 grams. DC bonds of 0.001" (0.025 mm) diameter, thermosonically bonded, are recommended. Ball bonds should be made with a force of 40-50 grams and wedge bonds at 18-22 grams. All bonds should be made with a nominal stage temperature of 150 °C. A minimum amount of ultrasonic energy should be applied to achieve reliable bonds. All bonds should be as short as possible, less than 12 mils (0.31 mm).

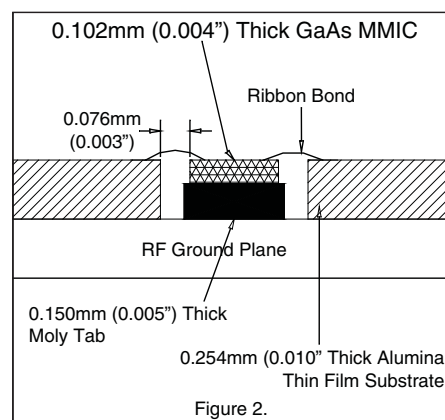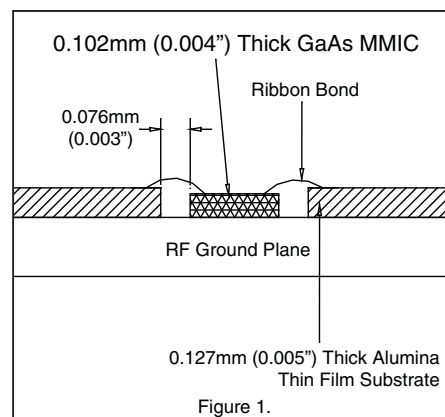



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331