

Metal Hybrid PPTC (MHP) Devices

Resettable Circuit Protection for High-Rate-Discharge Li-ion Battery Applications

The rapidly expanding market for high-rate-discharge lithium ion (Li-ion) batteries used in applications such as cordless power tools, e-bikes and back-up power supplies has created the need for cost-effective circuit protection devices capable of providing 30A+ hold currents at voltage ratings over 30V_{DC}. To meet this need, a new hybrid device has been developed that connects a bimetal protector in parallel with a PPTC (polymeric positive temperature coefficient) device. The resulting Metal Hybrid PPTC (MHP) device helps provide resettable overcurrent protection while also utilizing the low resistance of the PPTC device to help prevent arcing in the bimetal protector at higher currents.



Benefits:

- Fills market need for battery protection devices rated above 30A and 30V_{DC}
- Provides resettable overcurrent and short circuit protection in Li-ion batteries
- Helps protect Li-ion cells from damage from abnormal high currents that could cause heat damage and lead to premature cell end of life and potential field returns
- Arc suppression: Current shunts to the PPTC due to its low resistance helping to suppress arcing all while helping protect the contacts from damage or welding shut
- Double make/double break contact design allows for a high current rating in a smaller device package

Features:

- 30A hold current
- Rated at 36V_{DC}, 100A max.
- Low device resistance (< 2mOhm) compared to other breaker devices
- Able to withstand heavy vibration and impact
- Device allows easy mounting between 18650 cells


Applications:

- Li-ion battery packs for high-rate-discharge applications
 - Cordless power tools
 - E-bikes
 - Back-up power supplies (UPS)
 - Medical Devices
- Motor protection

Design Concept

In normal operation, current passes through the bimetal contact due to its low contact resistance. During an abnormal event, such as a power tool rotor lock, higher current is generated in the circuit causing the bimetal contact to open and its contact resistance to increase. At this point, the current shunts to the lower resistance PPTC device which helps prevent arcing between the contacts while also heating the bimetal, keeping it open and in a latched position. This integrated design addresses the need for compact,

resettable overcurrent protection devices capable of arc suppression in high current DC power applications.

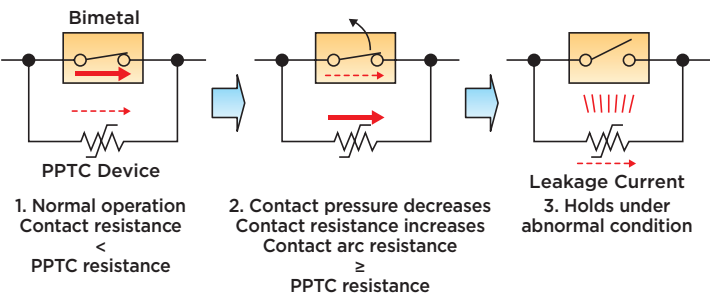


Electrical Characteristics (Typical)

Part Number	Current Trip Limits		Operating Voltage V _{MAX} (V _{DC})	Time-to-Trip		R _{Typ} (mOhms)
	I _{HOLD} @25°C	I _{TRIP} @25°C		100A @25°C	60A @25°C	
	(A)	(A)		(Seconds)	(Seconds)	
MHP30-36-T	30	50	36	4.5 ±1.5	17 ±10	1.6

Dimensions in Millimeters

	A		B		C		D		E		F	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm	25.8	26.2	9.2	9.6	5.1	5.5	32.8	33.6	6.8	7.2	0.9	1.1

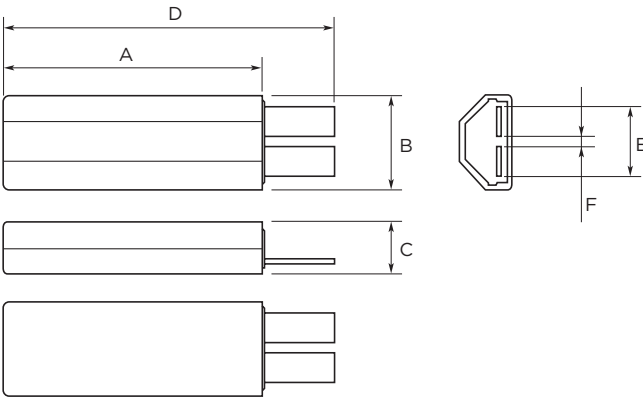

Marking Information

TE Connectivity _____ Manufacturer's Name
MHP30-36-T _____ Part Name
36V_{DC}, 30A, trip @50A _____ Rated Current and Voltage
□□□□□□ _____ Lot Identification

Rated Trip Cycles

DC16V, 100A (resistive) – 500 cycles
DC36V, 100A (resistive) – 100 cycles
(No welding of contacts)

Agency Recognitions: UL1077

TE Circuit Protection

308 Constitution Drive
Menlo Park, CA USA 94025-1164
Tel : (800) 227-7040, (650) 361-6900
Fax : (650) 361-4600
Email : MHP@TE.COM

www.circuitprotection.com
www.circuitprotection.com.hk (Chinese)
www.te.com/japan/bu/circuitprotection (Japanese)

TE Connectivity, TE connectivity (Logo) and TE (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, product and company names mentioned herein may be trademarks of their respective owners. All information, including illustrations, is believed to be accurate and reliable. However, users should independently evaluate the suitability of each product for their application. Tyco Electronics Corporation and/or its Affiliates in the TE Connectivity Ltd. family of companies ("TE") makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. TE's only obligations are those in the TE Standard Terms and Conditions of Sale and in no case will TE be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Specifications are subject to change without notice. In addition, TE reserves the right to make changes without notification to Buyer—to materials or processing that do not affect compliance with any applicable specification.





**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331