

# **Fiberglass Watertight 02 Product Drawings Last Updated 3/27/2008**

Rose+Bopla Enclosures  
7330 Executive Way  
Frederick, MD 21704  
[www.rose-bopla.com](http://www.rose-bopla.com)  
[rbinfo@pm-usa.com](mailto:rbinfo@pm-usa.com)

*Dimensional Drawings*

## This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

Rose+Bopla's fiberglass watertight enclosures are the enclosures to use when harsh environments are a problem. These enclosures are made of compression molded fiberglass, the

## Fiberglass Watertight 02

best method for producing a strong, rugged enclosure which will withstand all conditions: weather, liquids, chemicals and harsh manufacturing environments. Rose+Bopla's fiberglass enclosures stand up to adverse weather conditions and most industrial chemicals with no deterioration over many years. They will also withstand the effects of ultra-violet rays.

Our Fiberglass Watertight 02 enclosure consists of a compression molded lid and base, captive stainless steel lid lid screws, molded-in mounting inserts in base, and a foamed-in polyurethane gasket. Silicone and RFI gaskets are available as an option.

These Fiberglass Watertight 02 enclosures can be used for water pollution control devices, paper processing controls and ship and harbor beacon signal controls.




### TECHNICAL DATA:

- Color: Gray is standard similar to RAL 7000.
- Material: Fiberglass reinforced Polyester plastic.
- Impact Resistance: >7Nm, EN50014.
- Flammability: Self-extinguishing, UL 94 V0.
- Gasket Temperature Range:
  - Polyurethane Foam Gasket -40°F to +194°F
  - Silicone Foam Gasket -76°F to +266°F
  - Neoprene Gasket -40°F to +212°F
  - RFI Gasket -40°F to +392°F
- Captive Stainless Steel Lid Screws.
- Surface Resistance: >10<sup>12</sup> Ohm to DIN 53482.
- Disruptive Strength: 18KV / mm to DIN 53482.
- Toxicity: Halogen Free.
- Protection Classifications:
  - NEMA Types: up to Nema 4, 4X
  - IP 66, EN 60529
- Approvals:
  - UL Listed File #E206630, UL 50, UL 508
  - CSA Approved
  - Det Norske Veritas File #828.11/FERe
  - Maritime Register of Shipping #83033.250

| Fiberglass Watertight 02 Enclosures |                       |                      |                       |           |                   |
|-------------------------------------|-----------------------|----------------------|-----------------------|-----------|-------------------|
| Part Number                         | Length<br>(Inches/mm) | Width<br>(Inches/mm) | Height<br>(Inches/mm) | Weight    | Drawing<br>Page # |
| 02060603 00                         | 2.17 / 55             | 2.17 / 55            | 1.46 / 37             | .22 lbs   | 17-34             |
| 02060606 00                         | 2.17 / 55             | 2.17 / 55            | 2.32 / 59             | .28 lbs   | 17-34             |
| 02080806 00                         | 3.15 / 80             | 2.95 / 75            | 2.20 / 56             | .50 lbs   | 17-35             |
| 02080808 00                         | 3.15 / 80             | 2.95 / 75            | 2.95 / 75             | .66 lbs   | 17-35             |
| 02081106 00                         | 4.33 / 110            | 2.95 / 75            | 2.20 / 56             | .58 lbs   | 17-36             |
| 02081108 00                         | 4.33 / 110            | 2.95 / 75            | 2.95 / 75             | .79 lbs   | 17-36             |
| 02081606 00                         | 6.30 / 160            | 2.95 / 75            | 2.20 / 56             | .89 lbs   | 17-37             |
| 02081608 00                         | 6.30 / 160            | 2.95 / 75            | 2.95 / 75             | 1.01 lbs  | 17-37             |
| 02081906 00                         | 7.48 / 190            | 2.95 / 75            | 2.20 / 56             | .93 lbs   | 17-38             |
| 02081908 00                         | 7.48 / 190            | 2.95 / 75            | 2.95 / 75             | 1.16 lbs  | 17-38             |
| 02082306 00                         | 9.06 / 230            | 2.95 / 75            | 2.20 / 56             | 1.30 lbs  | 17-39             |
| 02082308 00                         | 9.06 / 230            | 2.95 / 75            | 2.95 / 75             | 1.47 lbs  | 17-39             |
| 02103208 00                         | 12.60 / 320           | 3.94 / 100           | 3.19 / 81             | 2.87 lbs  | 17-40             |
| 02121209 00                         | 4.80 / 122            | 4.72 / 120           | 3.58 / 91             | 1.65 lbs  | 17-40             |
| 02122209 00                         | 8.66 / 220            | 4.72 / 120           | 3.58 / 91             | 2.33 lbs  | 17-41             |
| 02161609 00                         | 6.30 / 160            | 6.30 / 160           | 3.58 / 91             | 2.59 lbs  | 17-41             |
| 02162609 00                         | 10.24 / 260           | 6.30 / 160           | 3.58 / 91             | 3.76 lbs  | 17-42             |
| 02163609 00                         | 14.17 / 360           | 6.30 / 160           | 3.58 / 91             | 4.73 lbs  | 17-42             |
| 02165609 00                         | 22.05 / 560           | 6.30 / 160           | 3.58 / 91             | 7.02 lbs  | 17-43             |
| 02252612 00                         | 10.04 / 255           | 9.84 / 250           | 4.76 / 121            | 5.84 lbs  | 17-43             |
| 02252616 00                         | 10.04 / 255           | 9.84 / 250           | 6.34 / 161            | 7.22 lbs  | 17-44             |
| 02254012 00                         | 15.75 / 400           | 9.84 / 250           | 4.76 / 121            | 8.04 lbs  | 17-44             |
| 02254016 00                         | 15.75 / 400           | 9.84 / 250           | 6.34 / 161            | 10.58 lbs | 17-45             |
| 02256012 00                         | 23.62 / 600           | 9.84 / 250           | 4.76 / 121            | 11.53 lbs | 17-45             |
| 02363609 00                         | 14.17 / 360           | 14.17 / 360          | 3.58 / 91             | 8.09 lbs  | 17-46             |
| 02414012 00                         | 15.75 / 400           | 15.94 / 405          | 4.76 / 121            | 12.30 lbs | 17-46             |

Note: Dimensions are external. Metric is the primary dimension. Inch conversions and weights are for the user's convenience and are for reference only. Accessories shown on drawing pages.

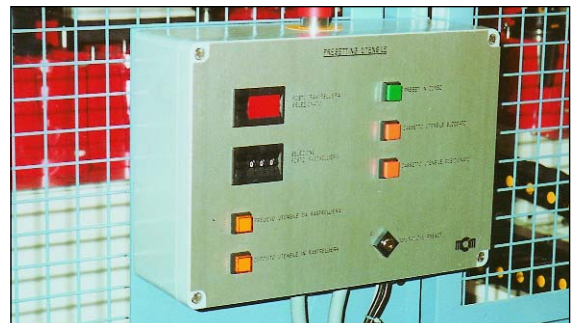

# Fiberglass Watertight

**02060603 00**

**External Dimensions: L 55 x W 55 x H 37 mm**


Page 1-9

## Standard Features



- **10093131 00** M4x18 Stainless steel captive combo head lid screws.
- Non-Removable foamed-in polyurethane gasket.

## Accessories

- 10093041 00 Mounting Plate screws.
- 10091001 00 Allen head lid screws.



\* = Conical form tapering downwards  
Free dimensions-tolerance to DIN 16901 - 130

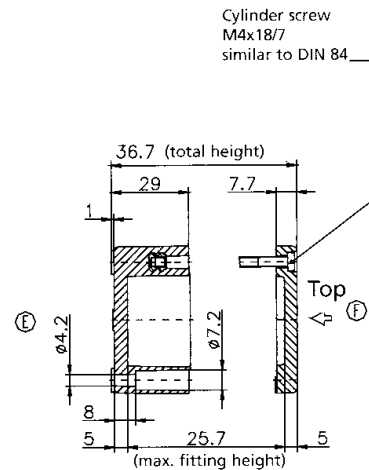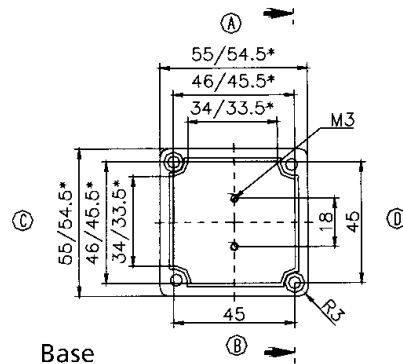

Cylinder screw  
M4x18/7  
similar to DIN 84

02060606 00

**External Dimensions: L 55 x W 55 x H 59 mm**


Page 1-9

## Standard Features



- **10093131 00** M4x18 Stainless steel captive combo head lid screws.
- Non-Removable foamed-in polyurethane gasket.

## Accessories

- 10093041 00 Mounting Plate screws.
- 10091001 00 Allen head lid screws.



\* = Conical form tapering downwards  
Free dimensions-tolerance to DIN 16901 - 130

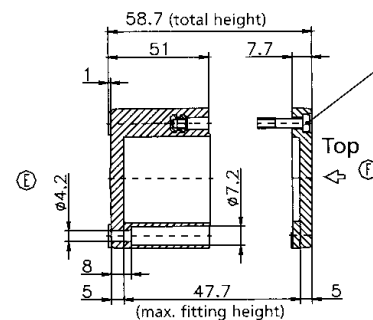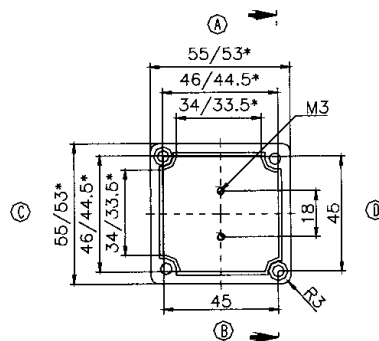

Cylinder screw  
M4x18/7  
similar to DIN 84



### 02080806 00

External Dimensions: L 80 x W 75 x H 56 mm


Page 1-9

#### Standard Features

- 10093132 00 M4x24 Stainless steel captive combo head lid screws.
- Non-Removable foamed-in Polyurethane gasket.


#### Accessories

- 10093041 00 Mounting Plate screws.
- 10093092 00 Allen head lid screws.
- 10052033 00 External Brackets.
- 10061101 00 Terminal rail (TS 15).
- 10089031 00 Mounting Plate.
- 10082014 00 4mm Silicon Gasket.
- 10082023 00 RFI 3.5mm Gasket (10.6" length).

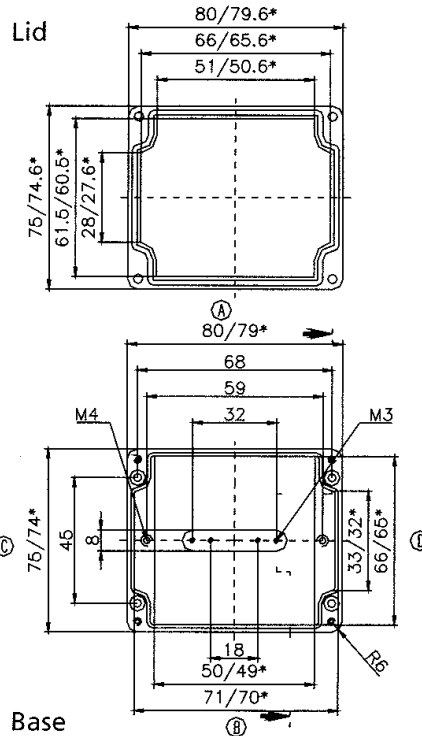

\* = Conical form tapering downwards  
Free dimensions-tolerance to DIN 16901 - 130

Cylinder screw  
M4x24/7  
similar to DIN 84

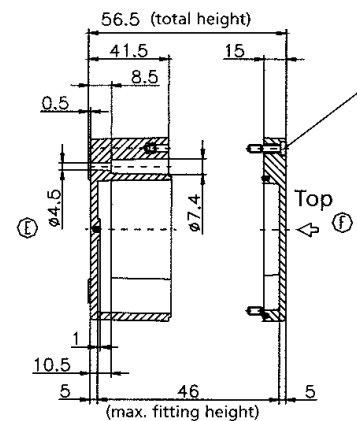

### 02080808 00

External Dimensions: L 80 x W 75 x H 75 mm


Page 1-9

#### Standard Features

- 10093131 00 M4x18 Stainless steel captive combo head lid screws.
- Non-Removable foamed-in Polyurethane gasket.


#### Accessories

- 10093041 00 Mounting Plate screws.
- 10093092 00 Allen head lid screws.
- 10052033 00 External Brackets.
- 10061101 00 Terminal rail (TS 15).
- 10089031 00 Mounting Plate.
- 10082014 00 4mm Silicone gasket.
- 10082023 00 3.5mm RFI Gasket (13.3" length).

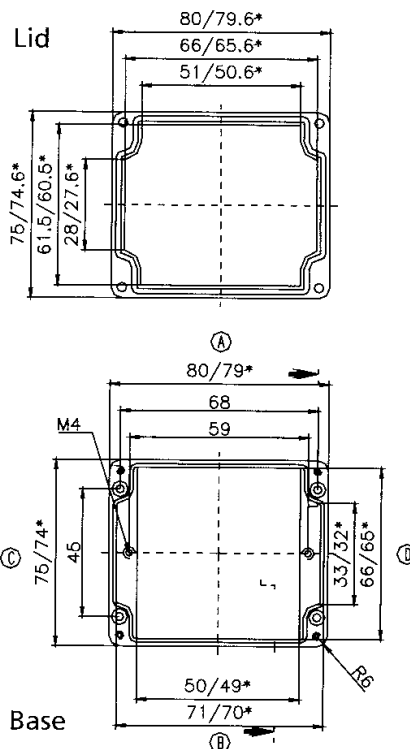

\* = Conical form tapering downwards  
Free dimensions-tolerance to DIN 16901 - 130

Cylinder screw  
M4x18/7  
similar to DIN 84

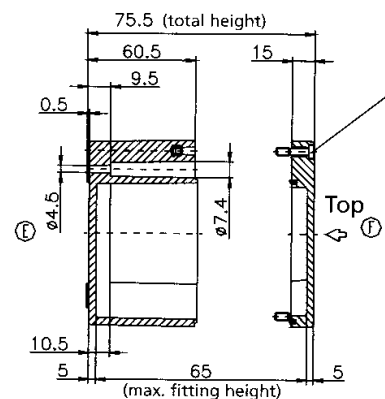


# Fiberglass Watertight

02081106 00

External Dimensions: L 110 x W 75 x H 56 mm

Page 1-9

| Standard Features                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• 10093133 00 M4x24 Stainless steel captive combo head lid screws.</li> <li>• Non-Removable foamed-in Polyurethane gasket.</li> </ul>                                                                                                                                                                                            |
| Accessories                                                                                                                                                                                                                                                                                                                                                             |
| <ul style="list-style-type: none"> <li>• 10093041 00 Mounting Plate screws.</li> <li>• 10093092 00 Allen head lid screws.</li> <li>• 10052033 00 External Brackets.</li> <li>• 10061102 00 Terminal rail (TS 15).</li> <li>• 10089033 00 Mounting Plate.</li> <li>• 10082014 00 4mm Silicone gasket.</li> <li>• 10082023 00 3.5mm RFI Gasket (13.3" length).</li> </ul> |

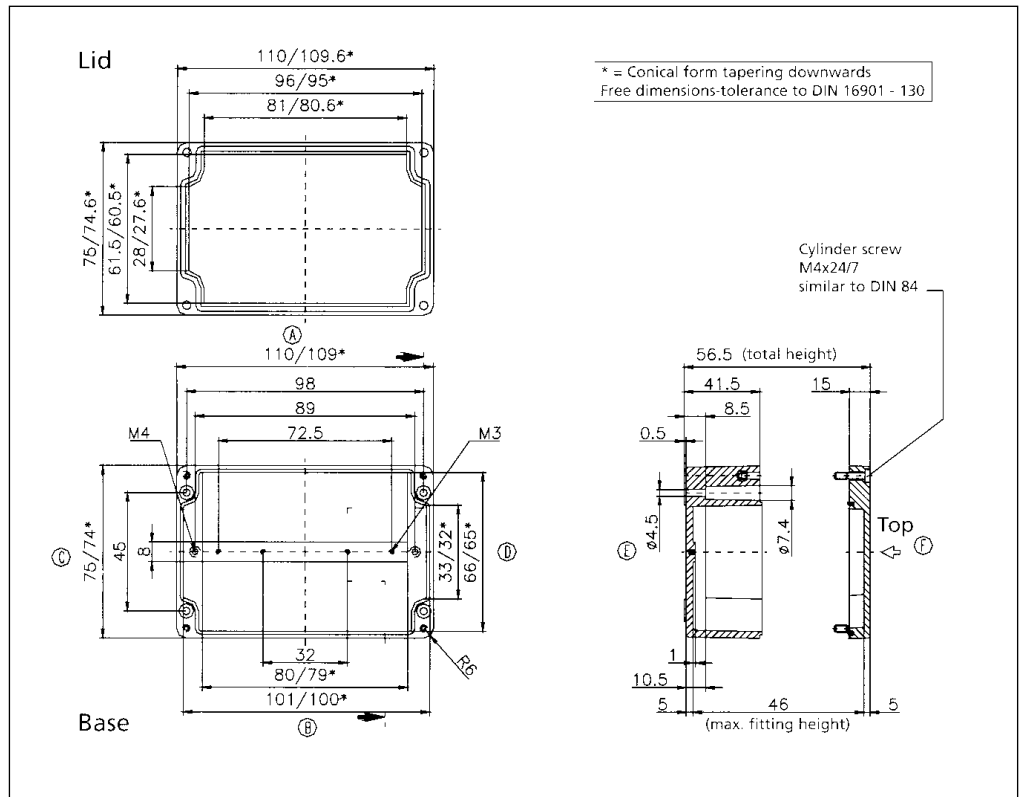


02081108 00

External Dimensions: L 110 x W 75 x H 75 mm

Page 1-9

| Standard Features                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• 10093133 00 M4x24 Stainless steel captive combo head lid screws.</li> <li>• Non-Removable foamed-in Polyurethane gasket.</li> </ul>                                                                                                                                                                                            |
| Accessories                                                                                                                                                                                                                                                                                                                                                             |
| <ul style="list-style-type: none"> <li>• 10093041 00 Mounting Plate screws.</li> <li>• 10093092 00 Allen head lid screws.</li> <li>• 10052033 00 External Brackets.</li> <li>• 10061102 00 Terminal rail (TS 15).</li> <li>• 10089033 00 Mounting Plate.</li> <li>• 10082014 00 4mm Silicone gasket.</li> <li>• 10082023 00 3.5mm RFI Gasket (13.3" length).</li> </ul> |

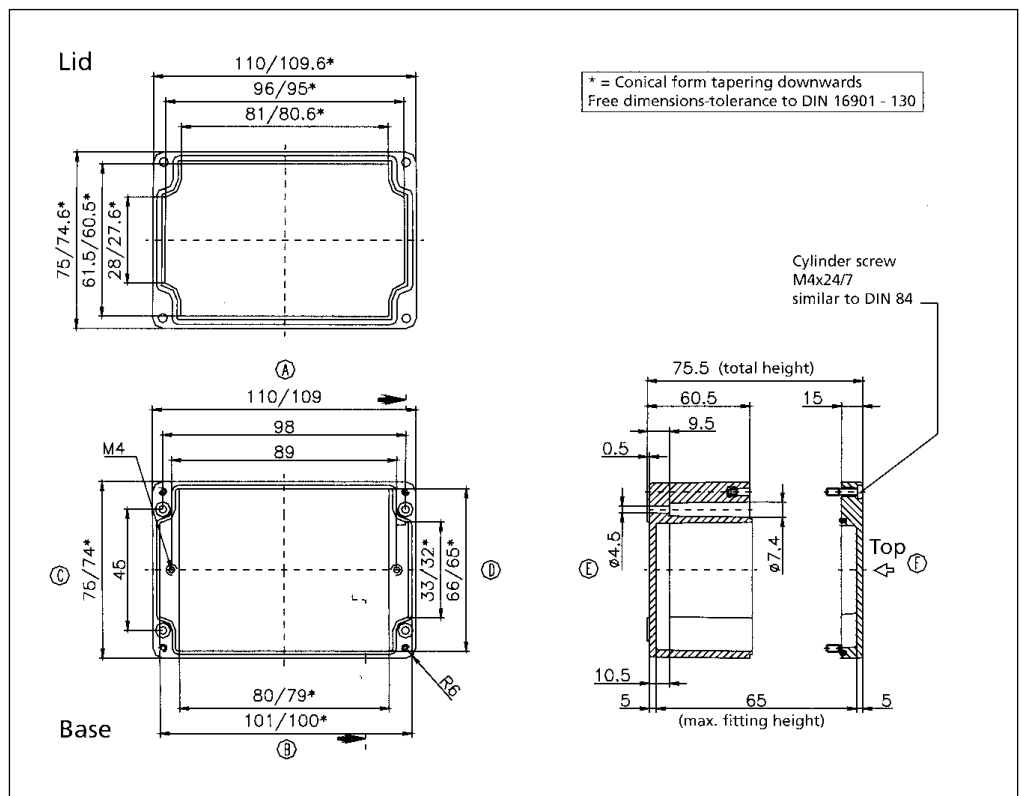

## Page 1-9

**Lid**

160/159.6\*  
146/145.6\*  
131/130.6\*

75/74.6\*  
61.5/60.5\*  
28/27.6\*

**Base**

160/159\*  
148  
139  
85.5  
72.5  
130/129\*  
151/150\*

M4  
M3  
P3

75/74\*  
45  
8  
33/32\*  
66/65\*  
5

\* = Conical form tapering downwards  
Free dimensions-tolerance to DIN 16901 - 130

56.5 (total height)  
41.5  
15  
0.5  
8.5  
10.5  
5  
46 (max. fitting height)  
5

Cylinder screw  
M4x24/7  
similar to DIN 84

Top

## Page 1-9

**Lid**

160/159.6\*  
146/145.6\*  
131/130.6\*

75/74.6\*  
61.5/60.5\*  
28/27.6\*

\* = Conical form tapering downwards  
Free dimensions-tolerance to DIN 16901 - 130

**Base**

160/159\*  
148  
139  
130/129\*  
151/150\*

75/74\*  
45  
33/32\*  
66/65\*  
R6


75.5 (total height)  
60.5  
15  
9.5  
0.5  
10.5  
5  
65 (max. fitting height)  
5

Cylinder screw  
M4x24/7  
similar to DIN 84


Top

# Fiberglass Watertight

| Standard Features                                                                                                                                                                                                                                                                                                                                                 |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>•10093133 00 M4x24 Stainless steel captive combo head lid screws.</li> <li>•Non-Removable foamed-in Polyurethane gasket.</li> </ul>                                                                                                                                                                                        |
| Accessories                                                                                                                                                                                                                                                                                                                                                       |
| <ul style="list-style-type: none"> <li>•10093041 00 Mounting Plate screws.</li> <li>•10091002 00 Allen head lid screws.</li> <li>•10052033 00 External Brackets.</li> <li>•10061104 00 Terminal rail (TS 15).</li> <li>•10089037 00 Mounting Plate.</li> <li>•10082014 00 4mm Silicone gasket.</li> <li>•10082023 00 3.5mm RFI Gasket (19.25" length).</li> </ul> |

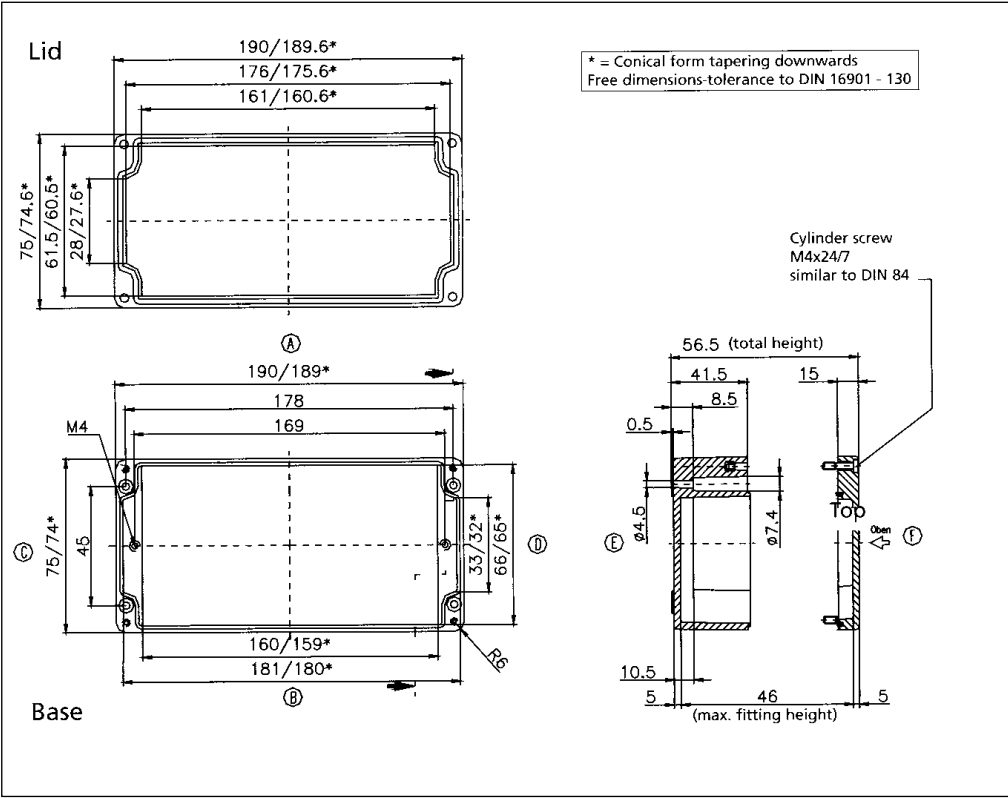

| Standard Features                                                                                                                                                                                                                                                                                                                                                |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>•10093133 00 M4x24 Stainless steel captive combo head lid screws.</li> <li>•Non-Removable foamed-in Polyurethane gasket.</li> </ul>                                                                                                                                                                                       |
| Accessories                                                                                                                                                                                                                                                                                                                                                      |
| <ul style="list-style-type: none"> <li>•10093041 00 Mounting Plate screws.</li> <li>•10091002 00 Allen head lid screws.</li> <li>•10052033 00 External Brackets.</li> <li>•10061104 00 Terminal rail (TS 15).</li> <li>•10089037 00 Mounting Plate.</li> <li>•10082014 00 4mm Silicone gasket.</li> <li>•10082023 00 3.5mm RFI Gasket (17.7" length).</li> </ul> |

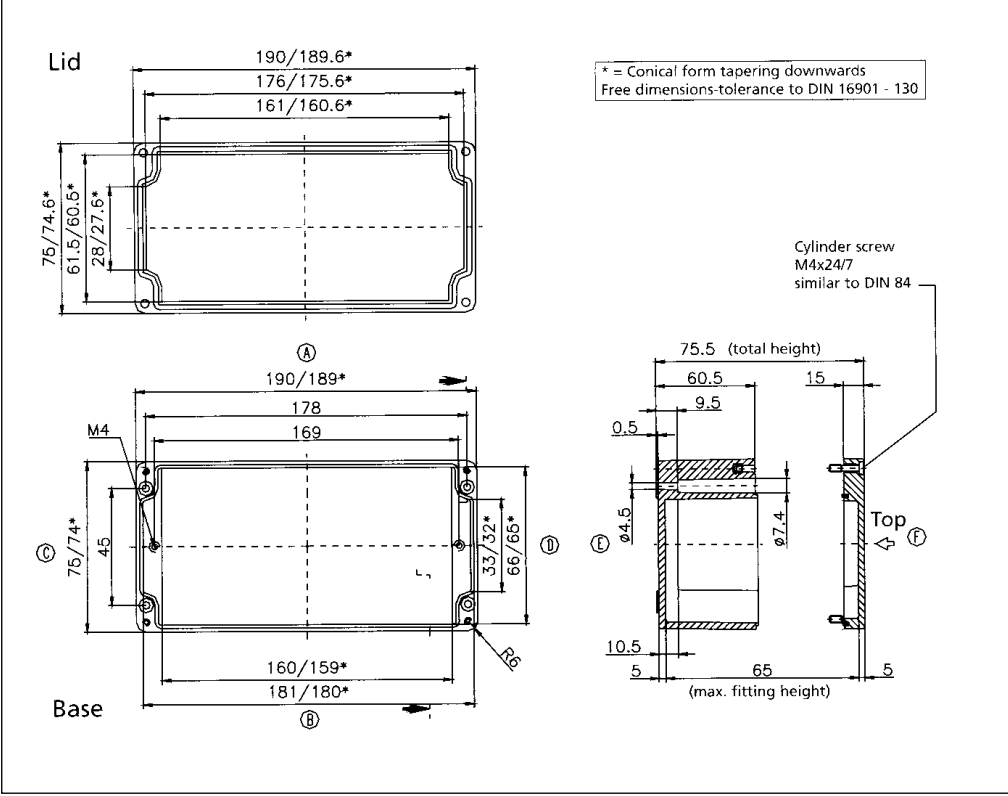





**ROSE+BOPLA**  
ENCLOSURES

A PHOENIX MECANO COMPANY

**02082306 00**

**External Dimensions: L 230 x W 75 x H 56 mm**


**Page 1-9**

**Standard Features**

- 10093133 00 M4x24 Stainless steel captive combo head lid screws.
- Non-Removable foamed-in Polyurethane gasket.

**Accessories**

- 10093041 00 Mounting Plate screws.
- 10093092 00 Allen head lid screws.
- 10052033 00 External Brackets.
- 10061105 00 Terminal rail (TS 15).
- 10082014 00 4mm Silicone gasket.
- 10082023 00 3.5mm RFI Gasket (23.2" length).

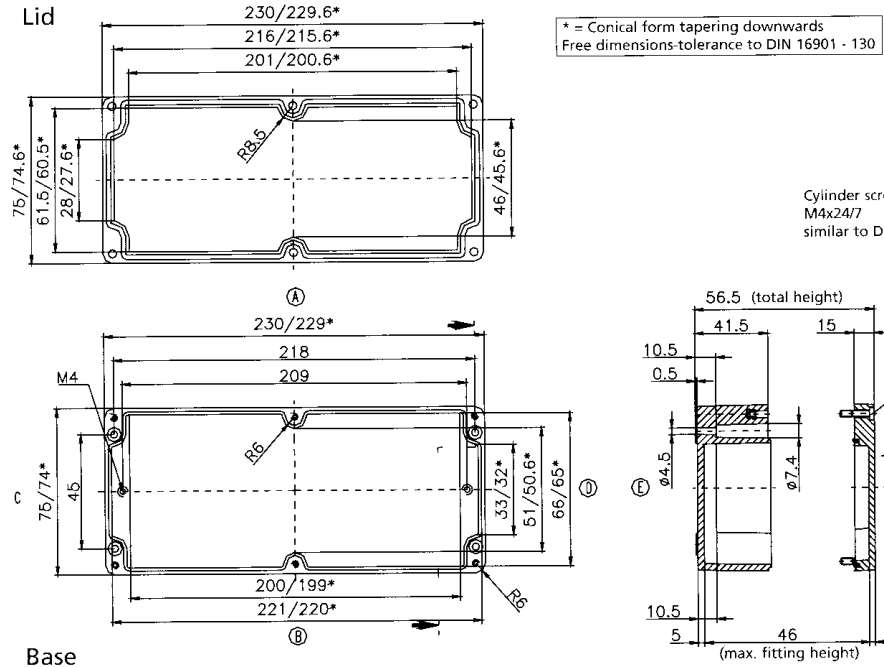

**02082308 00**

**External Dimensions: L 230 x W 75 x H 75 mm**


**Page 1-9**

**Standard Features**

- 10093133 00 M4x24 Stainless steel captive combo head lid screws.
- Non-Removable foamed-in Polyurethane gasket.

**Accessories**

- 10093041 00 Mounting Plate screws.
- 10093092 00 Allen head lid screws.
- 10052033 00 External Brackets.
- 10061105 00 Terminal rail (TS 15).
- 10082014 00 4mm Silicone gasket.
- 10082023 00 3.5mm RFI Gasket (23.2" length).

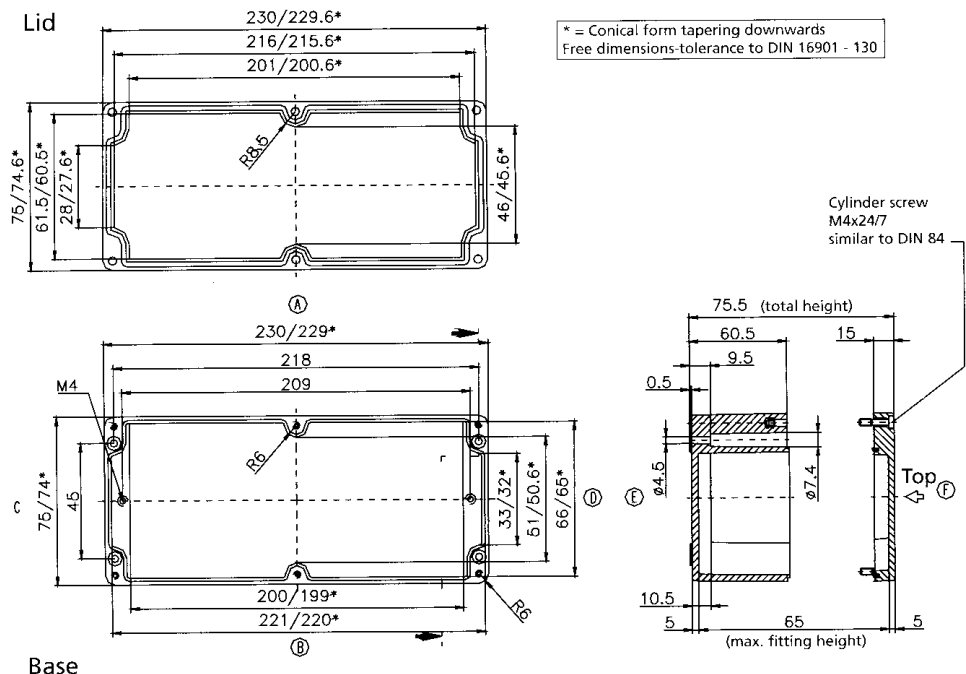

Dimensional Drawings

# Fiberglass Watertight

02103208 00

External Dimensions: L 320 x W 100 x H 81 mm


Page 1-9

## Standard Features

- 10093133 00 M4x24 Stainless steel captive combo head lid screws.
- Non-Removable foamed-in Polyurethane gasket.

## Accessories

- 10093041 00 Mounting Plate screws.
- 10093261 00 Allen head lid screws.
- 10052034 00 External Brackets.
- 10061106 00 Terminal rail (TS 15).
- 10052101 00 External Hinges.
- 10011006 00 Mounting Plate.
- 10082014 00 4mm Silicone gasket.
- 10082023 00 3.5mm RFI Gasket (33.0" length).

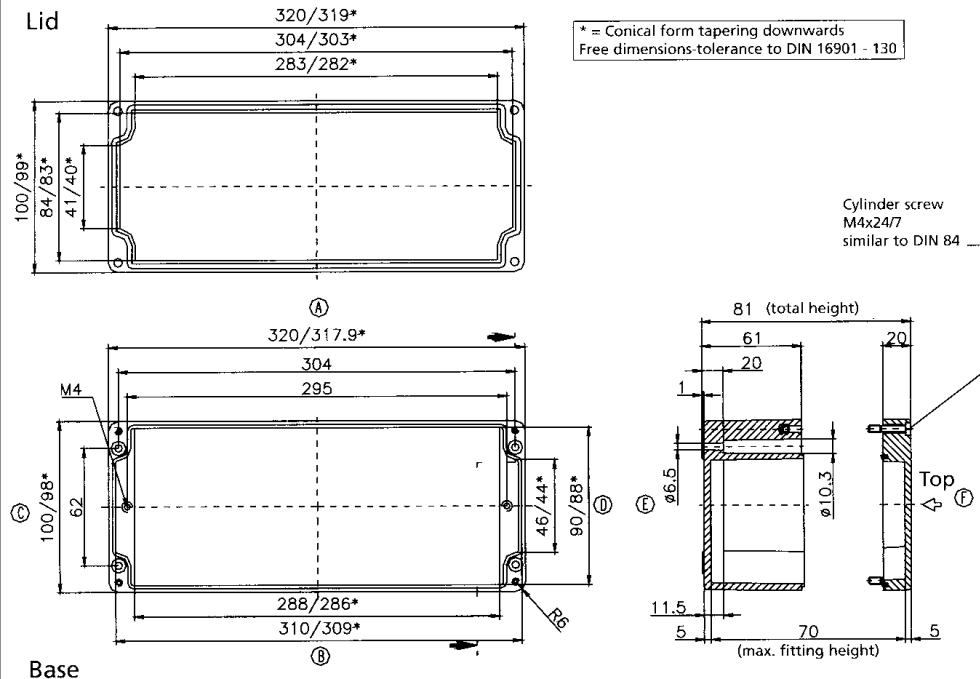

02121209 00

External Dimensions: L 122 x W 120 x H 91 mm


Page 1-9

## Standard Features

- 10093136 00 M6x35 Stainless steel captive combo head lid screws.
- Non-Removable foamed-in Polyurethane gasket.

## Accessories

- 10093058 00 Mounting Plate screws.
- 10093262 00 Allen head lid screws.
- 10052034 00 External Brackets.
- 10061401 00 Terminal rail (TS 32).
- 10061421 00 Terminal rail (TS 35).
- 10052101 00 External Hinges.
- 10050401 00 Ground Strip.
- 10089151 00 Mounting Plate.
- 10082014 00 4mm Silicone gasket.
- 10082023 00 3.5mm RFI Gasket (16.4" length).

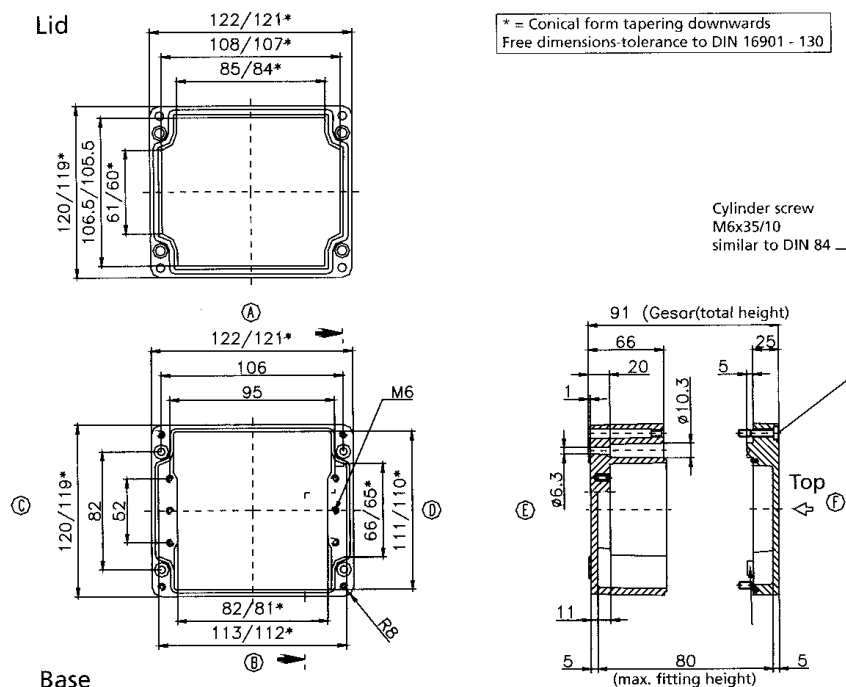



**ROSE+BOPLA**  
ENCLOSURES

A PHOENIX MECANO COMPANY

**02122209 00**

**External Dimensions: L 220 x W 120 x H 91 mm**

**Page 1-9**


**Standard Features**

- 10093136 00 M6x35 Stainless steel captive combo head lid screws.
- Non-Removable foamed-in Polyurethane gasket.


**Accessories**

- 10093058 00 Mounting Plate screws.
- 10093262 00 Allen head lid screws.
- 10052034 00 External Brackets.
- 10061402 00 Terminal rail (TS 32).
- 10061422 00 Terminal rail (TS 35).
- 10052101 00 External Hinges.
- 10050402 00 Ground Strip.
- 10089152 00 Mounting Plate.
- 10082014 00 4mm Silicone gasket.
- 10082023 00 3.5mm RFI Gasket (23.6" length).

Lid

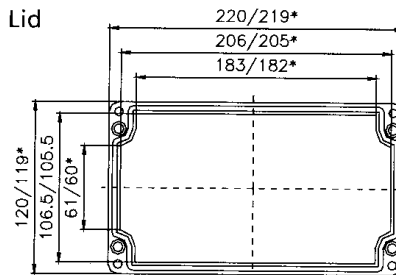


\* = Conical form tapering downwards  
Free dimensions-tolerance to DIN 16901 - 130

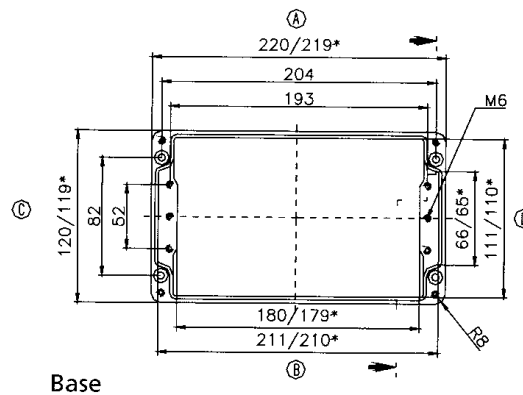

Base

Cylinder screw  
M6x35/10  
similar to DIN 84

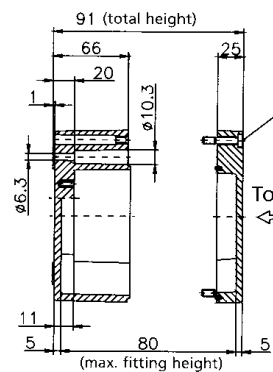

**02161609 00**

**External Dimensions: L 160 x W 160 x H 91 mm**

**Page 1-9**


**Standard Features**

- 10093135 00 M6x30 Stainless steel captive combo head lid screws.
- Non-Removable foamed-in Polyurethane gasket.


**Accessories**

- 10093058 00 Mounting Plate screws.
- 10093263 00 Allen head lid screws.
- 10052034 00 External Brackets.
- 10061403 00 Terminal rail (TS 32).
- 10061423 00 Terminal rail (TS 35).
- 10052101 00 External Hinges.
- 10050404 00 Ground Strip.
- 10089106 00 Mounting Plate.
- 10082015 00 5mm Silicone gasket.
- 10082024 00 4mm RFI Gasket (22.0" length).

Lid




\* = Conical form tapering downwards  
Free dimensions-tolerance to DIN 16901 - 130

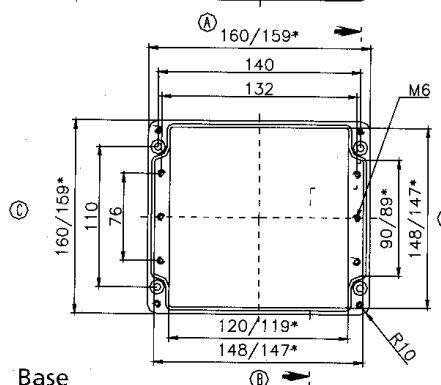

Base

Cylinder screw  
M6x30/10  
similar to DIN 84

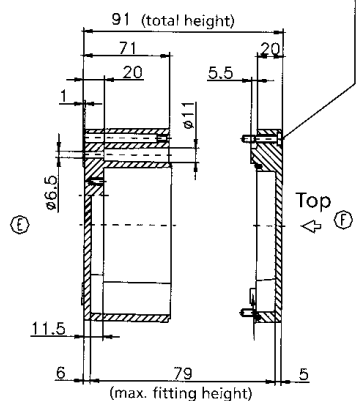

Dimensional Drawings

# Fiberglass Watertight

02162609 00

External Dimensions: L 260 x W 160 x H 91 mm

Page 1-9


## Standard Features

- 10093135 00 M6x30 Stainless steel captive combo head lid screws.
- Non-Removable foamed-in Polyurethane gasket.


## Accessories

- 10093058 00 Mounting Plate screws.
- 10093263 00 Allen head lid screws.
- 10052034 00 External Brackets.
- 10061404 00 Terminal rail (TS 32).
- 10061424 00 Terminal rail (TS 35).
- 10052101 00 External Hinges.
- 10050405 00 Ground Strip.
- 10089107 00 Mounting Plate.
- 10082015 00 5mm Silicone gasket.
- 10082024 00 4mm RFI Gasket (29.1" length).


Lid

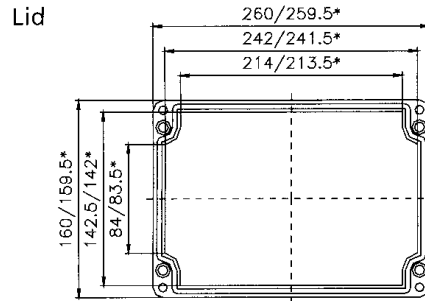

\* = Conical form tapering downwards  
Free dimensions-tolerance to DIN 16901 - 130

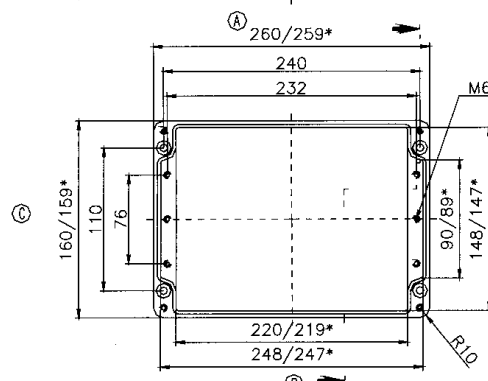

Base

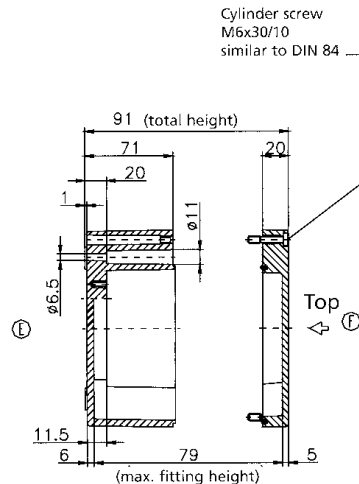

Cylinder screw  
M6x30/10  
similar to DIN 84

Top

02163609 00

External Dimensions: L360 x W160 x H91 mm

Page 1-9


## Standard Features

- 10093135 00 M6x30 Stainless steel captive combo head lid screws.
- Non-Removable foamed-in Polyurethane gasket.


## Accessories

- 10093058 00 Mounting Plate screws.
- 10093263 00 Allen head lid screws.
- 10052034 00 External Brackets.
- 10061405 00 Terminal rail (TS 32).
- 10061425 00 Terminal rail (TS 35).
- 10052101 00 External Hinges.
- 10050406 00 Ground Strip.
- 10089108 00 Mounting Plate.
- 10082015 00 5mm Silicone gasket.
- 10082024 00 4mm RFI Gasket (37.0" length).


Lid

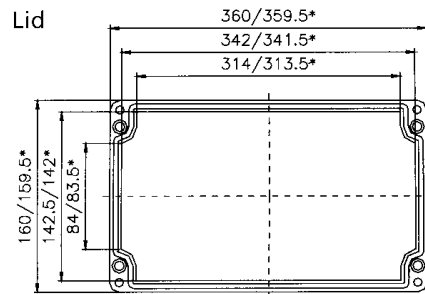

\* = Conical form tapering downwards  
Free dimensions-tolerance to DIN 16901 - 130

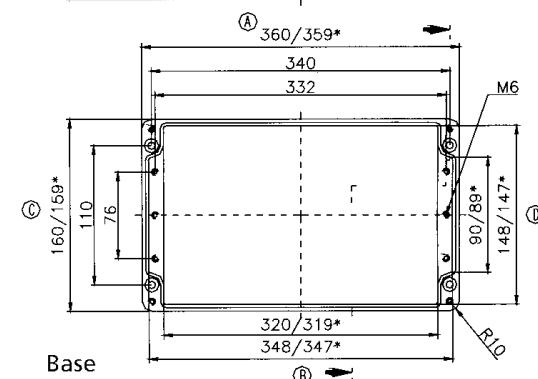

Base

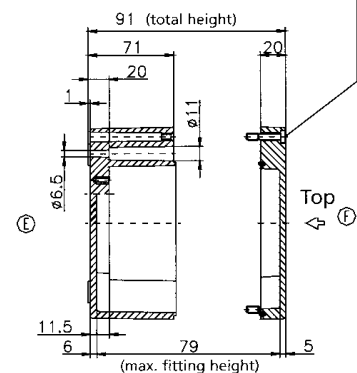

Cylinder screw  
M6x30/10  
similar to DIN 84

Top



02165609 00

External Dimensions: L560 x W160 x H91 mm

Page 1-9


### Standard Features

- 10093135 00 M6x30 Stainless steel captive combo head lid screws.
- Non-Removable foamed-in Polyurethane gasket.


### Accessories

- 10093058 00 Mounting Plate screws.
- 10093263 00 Allen head lid screws.
- 10052034 00 External Brackets.
- 10061406 00 Terminal rail (TS 32).
- 10061426 00 Terminal rail (TS 35).
- 10052101 00 External Hinges.
- 10050407 00 Ground Strip.
- 10089109 00 Mounting Plate.
- 10082015 00 5mm Silicone gasket.
- 10082024 00 4mm RFI Gasket (54.7" length).


Lid

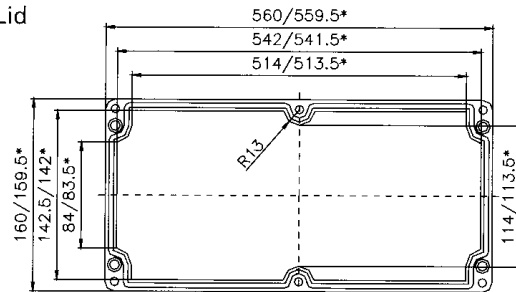

\* = Conical form tapering downwards  
Free dimensions-tolerance to DIN 16901 - 130

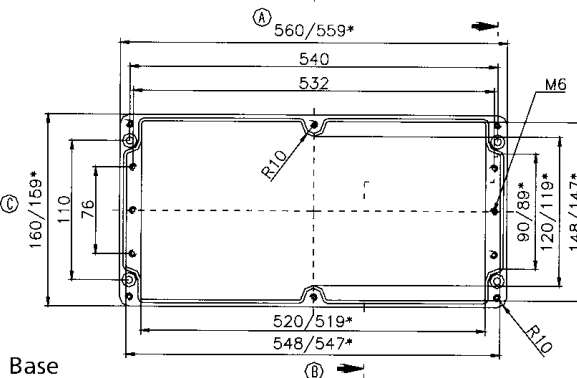

Base

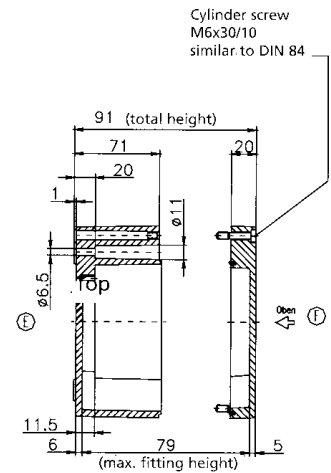

Cylinder screw  
M6x30/10  
similar to DIN 84

02252612 00

External Dimensions: L 255 x W 250 x H 121 mm

Page 1-9


### Standard Features

- 10093136 00 M6x35 Stainless steel captive comb head lid screws.
- Non-Removable foamed-in Polyurethane gasket.


### Accessories

- 10093058 00 Mounting Plate screws.
- 10093262 00 Allen head lid screws.
- 10052034 00 External Brackets.
- 10061414 00 Terminal rail (TS 32).
- 10061434 00 Terminal rail (TS 35).
- 10052101 00 External Hinges.
- 10050405 00 Ground Strip.
- 10089141 00 Mounting Plate.
- 10082015 00 5mm Silicone gasket.
- 10082024 00 4mm RFI Gasket (35.0" length).


Lid



\* = Conical form tapering downwards  
Free dimensions-tolerance to DIN 16901 - 130

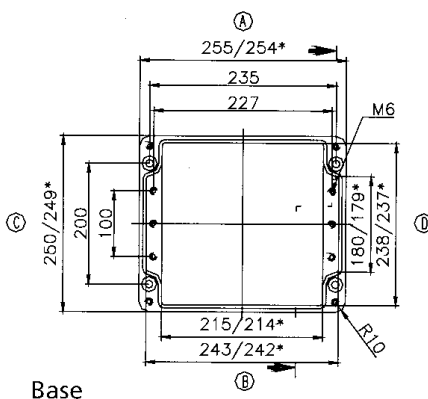

Base

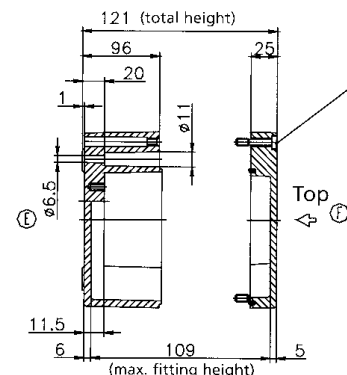

Cylinder screw  
M6x35/10  
similar to DIN 84


# Fiberglass Watertight

02252616 00

External Dimensions: L 255 x W 250 x H 161 mm

Page 1-9

| Standard Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• 10093070 00 M6x75 Stainless steel captive combo head lid screws.</li> <li>• Non-Removable foamed-in Polyurethane gasket.</li> </ul>                                                                                                                                                                                                                                                                                                                     |
| Accessories                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <ul style="list-style-type: none"> <li>• 10093058 00 Mounting Plate screws.</li> <li>• 10091006 00 Allen head lid screws.</li> <li>• 10052034 00 External Brackets.</li> <li>• 10061414 00 Terminal rail (TS 32).</li> <li>• 10061434 00 Terminal rail (TS 35).</li> <li>• 10052101 00 External Hinges.</li> <li>• 10050405 00 Ground Strip.</li> <li>• 10089141 00 Mounting Plate.</li> <li>• 10082015 00 5mm Silicone gasket.</li> <li>• 10082024 00 4mm RFI Gasket (35.0" length).</li> </ul> |

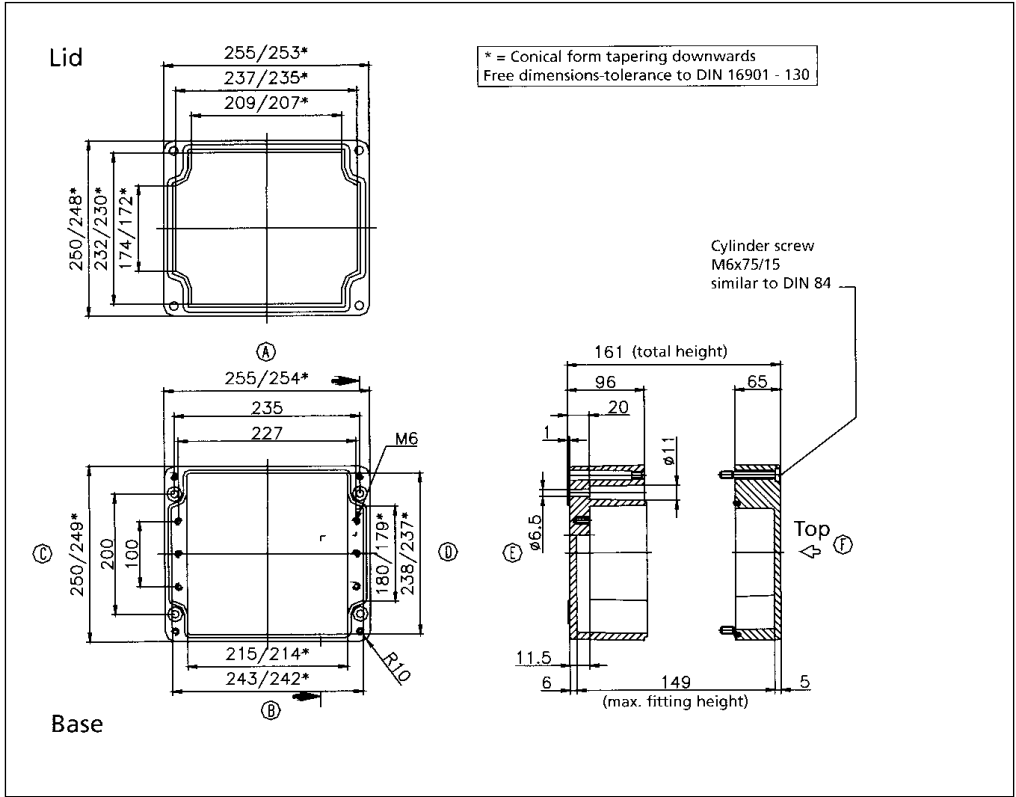


02254012 00

External Dimensions: L 400 x W 250 x H 121 mm

Page 1-9

| Standard Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• 10093136 00 M6x35 Stainless steel captive combo head lid screws.</li> <li>• Non-Removable foamed-in Polyurethane gasket.</li> </ul>                                                                                                                                                                                                                                                                                                                     |
| Accessories                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <ul style="list-style-type: none"> <li>• 10093058 00 Mounting Plate screws.</li> <li>• 10093262 00 Allen head lid screws.</li> <li>• 10052034 00 External Brackets.</li> <li>• 10061407 00 Terminal rail (TS 32).</li> <li>• 10061427 00 Terminal rail (TS 35).</li> <li>• 10052101 00 External Hinges.</li> <li>• 10050411 00 Ground Strip.</li> <li>• 10089143 00 Mounting Plate.</li> <li>• 10082015 00 5mm Silicone gasket.</li> <li>• 10082024 00 4mm RFI Gasket (46.9" length).</li> </ul> |

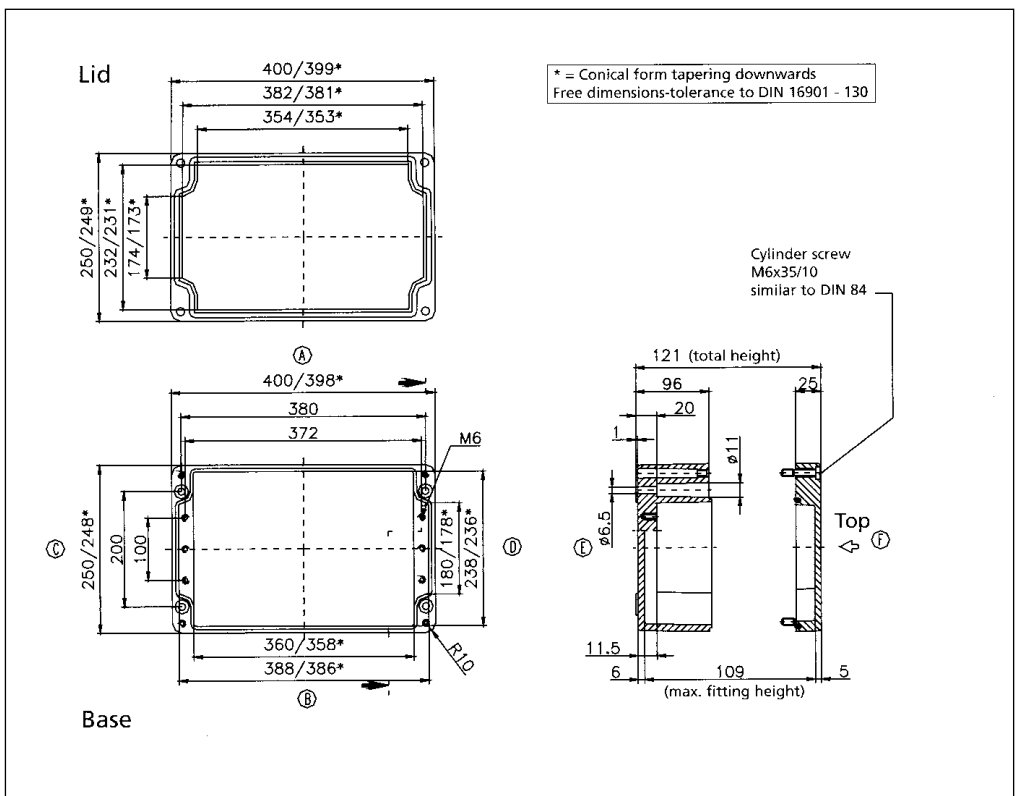



**ROSE+BOPLA**  
ENCLOSURES

A PHOENIX MECANO COMPANY

**02254016 00**

**External Dimensions: L 400 x W 250 x H 161 mm**

**Page 1-9**


**Standard Features**

- 10093070 00 M6x75 Stainless steel captive combo head lid screws.
- Non-Removable foamed-in Polyurethane gasket.


**Accessories**

- 10093058 00 Mounting Plate screws.
- 10091006 00 Allen head lid screws.
- 10052034 00 External Brackets.
- 10061407 00 Terminal rail (TS 32).
- 10061427 00 Terminal rail (TS 35).
- 10052101 00 External Hinges.
- 10050411 00 Ground Strip.
- 10089143 00 Mounting Plate.
- 10082015 00 5mm Silicone gasket.
- 10082024 00 4mm RFI Gasket (46.9" length).


Lid

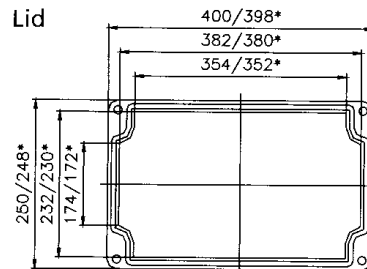

\* = Conical form tapering downwards  
Free dimensions-tolerance to DIN 16901 - 130

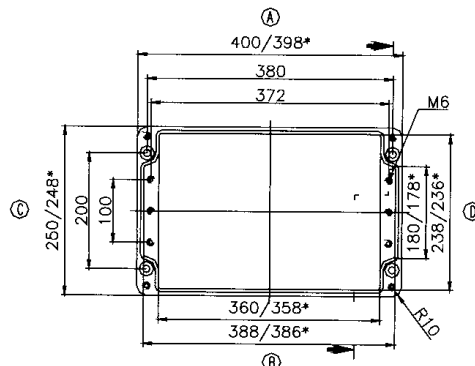

Base

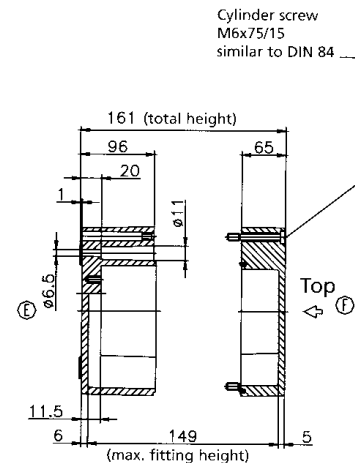

Cylinder screw  
M6x75/15  
similar to DIN 84

Top

**02256012 00**

**External Dimensions: L 600 x W 250 x H 121 mm**

**Page 1-9**


**Standard Features**

- 10093136 00 M6x35 Stainless steel captive combo head lid screws.
- Non-Removable foamed-in Polyurethane gasket.


**Accessories**

- 10093058 00 Mounting Plate screws.
- 10093262 00 Allen head lid screws.
- 10052034 00 External Brackets.
- 10061408 00 Terminal rail (TS 32).
- 10061428 00 Terminal rail (TS 35).
- 10052101 00 External Hinges.
- 10050412 00 Ground Strip.
- 10089144 00 Mounting Plate.
- 10082015 00 5mm Silicone gasket.
- 10082014 00 4mm RFI Gasket (59.8" length).


Lid

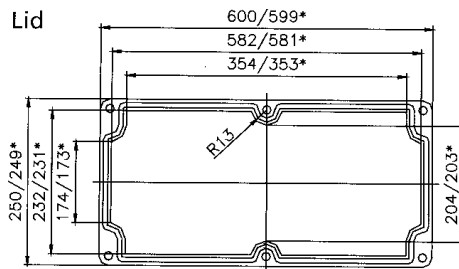

\* = Conical form tapering downwards  
Free dimensions-tolerance to DIN 16901 - 130

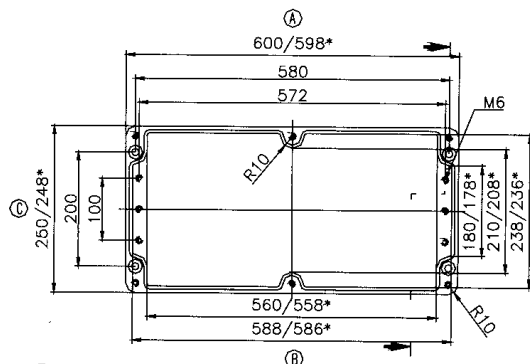

Base

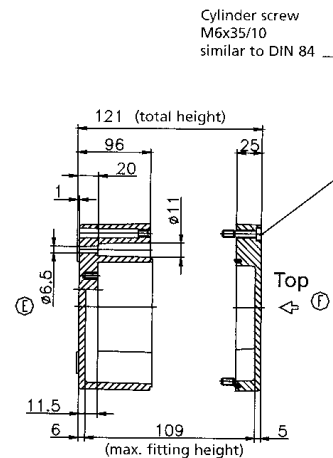

Cylinder screw  
M6x35/10  
similar to DIN 84

Top


# Fiberglass Watertight

02363609 00

External Dimensions: L 360 x W 360 x H 91 mm

Page 1-9

| Standard Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• 10093135 00 M6x30 Stainless steel captive combo head lid screws.</li> <li>• Non-Removable foamed-in Polyurethane gasket.</li> </ul>                                                                                                                                                                                                                                                                                                                     |
| Accessories                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <ul style="list-style-type: none"> <li>• 10093058 00 Mounting Plate screws.</li> <li>• 10093263 00 Allen head lid screws.</li> <li>• 10052034 00 External Brackets.</li> <li>• 10061405 00 Terminal rail (TS 32).</li> <li>• 10061425 00 Terminal rail (TS 35).</li> <li>• 10052101 00 External Hinges.</li> <li>• 10050406 00 Ground Strip.</li> <li>• 10089145 00 Mounting Plate.</li> <li>• 10082015 00 5mm Silicone gasket.</li> <li>• 10082014 00 4mm RFI Gasket (53.5" length).</li> </ul> |

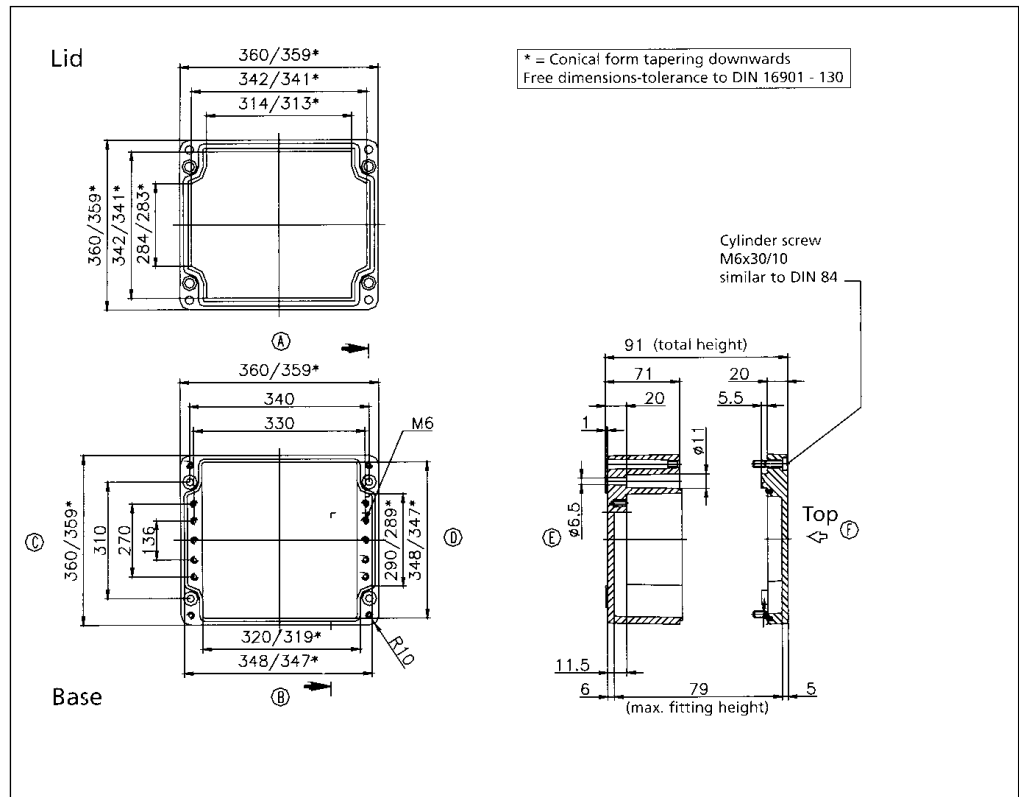


02414012 00

External Dimensions: L 400 x W 405 x H 121 mm

Page 1-9

| Standard Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• 10093135 00 M6x30 Stainless steel captive combo head lid screws.</li> <li>• Non-Removable foamed-in Polyurethane gasket.</li> </ul>                                                                                                                                                                                                                                                                                                                     |
| Accessories                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <ul style="list-style-type: none"> <li>• 10093058 00 Mounting Plate screws.</li> <li>• 10093263 00 Allen head lid screws.</li> <li>• 10052034 00 External Brackets.</li> <li>• 10061407 00 Terminal rail (TS 32).</li> <li>• 10061427 00 Terminal rail (TS 35).</li> <li>• 10052101 00 External Hinges.</li> <li>• 10050411 00 Ground Strip.</li> <li>• 10089146 00 Mounting Plate.</li> <li>• 10082015 00 5mm Silicone gasket.</li> <li>• 10082014 00 4mm RFI Gasket (58.3" length).</li> </ul> |

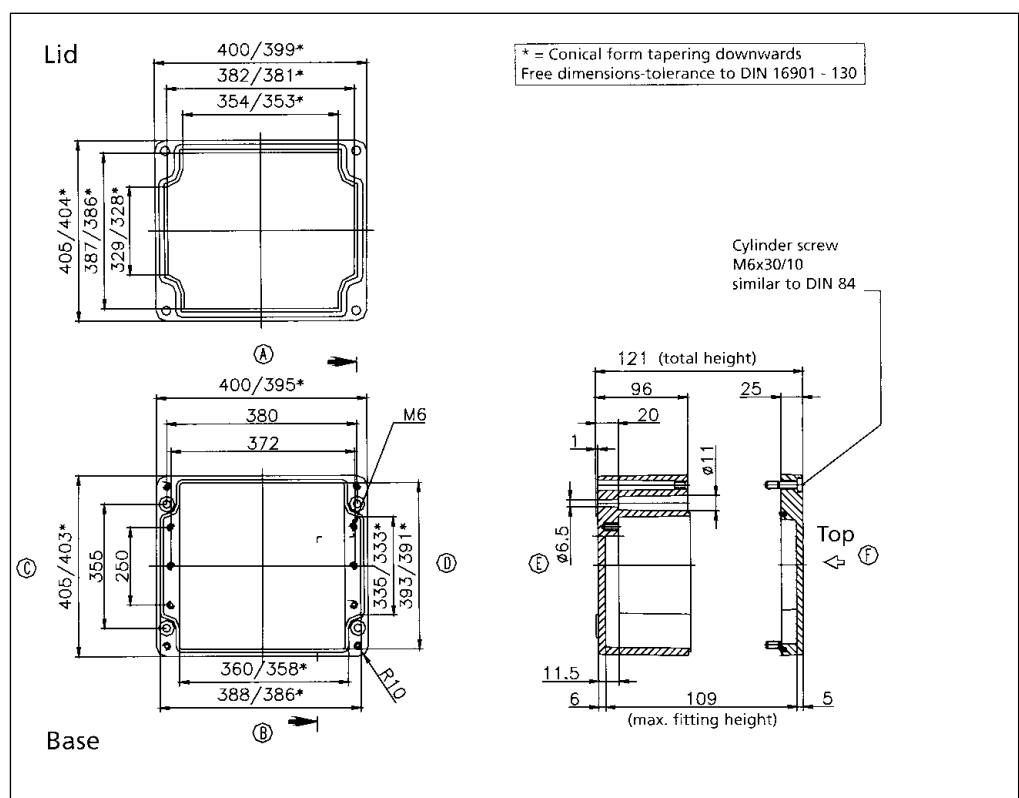





**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331