

# Radial Leaded Glass Encapsulated Style


## Features:

- Rugged, low cost, very high reliability
- Operation from -50°C up to 300°C
- Values from 2186Ω to 1.38MΩ at 25°C
- Standard tolerance of ±3% at rated temp
- Temperature measurement and control
- Fast response time
- High temperature stability
- Glass encapsulation provides resistance to moisture and other environmental factors
- Available in ceramic reinforced glass bead configuration or glass bead configurations


## Description:

SS&C radial leaded glass encapsulated thermistors provide a low cost option for applications that require superior stability and high temperature operation. The thermistors are glass encapsulated to allow for operation in a wide array of environments including high humidity and rapid thermal cycling. The small size allows the sensor to react quickly to small temperature changes. Contact the factory for specific design or application information or the availability of options.

### CERAMIC REINFORCED GLASS BEAD THERMISTOR

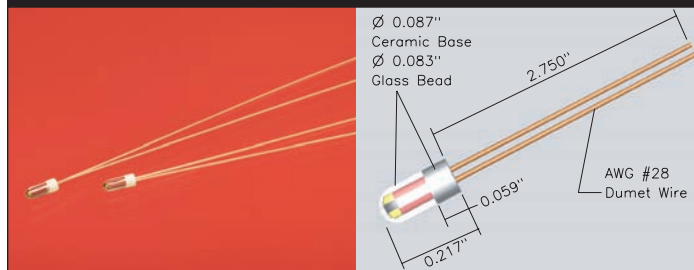

### GLASS BEAD THERMISTOR

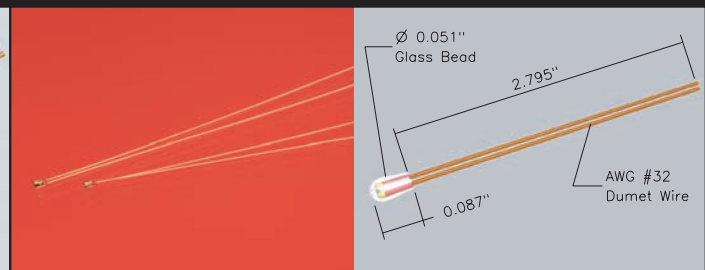

| SS&C Part Number                                                                                                  | Resistance @25°C (Ohms) | Resistance Specification (±3%) | SS&C Matl | $\beta_{25/85}$ (Kelvin) | SS&C Part Number                                                                                                  | Resistance @25°C (Ohms) | Resistance Specification (±3%) | SS&C Matl | $\beta_{25/85}$ (Kelvin) |
|-------------------------------------------------------------------------------------------------------------------|-------------------------|--------------------------------|-----------|--------------------------|-------------------------------------------------------------------------------------------------------------------|-------------------------|--------------------------------|-----------|--------------------------|
| GC2183T-3-0                                                                                                       | 2186                    | 6,000Ω @ 0°C                   | T         | 3420 ± 2%                | GB2183T-3-0                                                                                                       | 2186                    | 6,000Ω @ 0°C                   | T         | 3420 ± 2%                |
| GC5373U-3-0                                                                                                       | 5369                    | 15,000Ω @ 0°C                  | U         | 3480 ± 2%                | GB5373U-3-0                                                                                                       | 5369                    | 15,000Ω @ 0°C                  | U         | 3480 ± 2%                |
| GC1074U-3-0                                                                                                       | 10,739                  | 30,000Ω @ 0°C                  | U         | 3480 ± 2%                | GB1074U-3-0                                                                                                       | 10,739                  | 30,000Ω @ 0°C                  | U         | 3480 ± 2%                |
| GC4914A-3-100                                                                                                     | 49,120                  | 3,300Ω @ 100°C                 | A         | 3992 ± 2%                | GB4914A-3-100                                                                                                     | 49,120                  | 3,300Ω @ 100°C                 | A         | 3992 ± 2%                |
| GC9864N-3-200                                                                                                     | 98,633                  | 550Ω @ 200°C                   | N         | 4066 ± 3%                | GB9864N-3-200                                                                                                     | 98,633                  | 550Ω @ 200°C                   | N         | 4066 ± 3%                |
| GC2315R-3-200                                                                                                     | 231,440                 | 1,000Ω @ 200°C                 | R         | 4240 ± 3%                | GB2315R-3-200                                                                                                     | 231,440                 | 1,000Ω @ 200°C                 | R         | 4240 ± 3%                |
| GC1396V-3-200                                                                                                     | 1,388,100               | 4,000Ω @ 200°C                 | V         | 4557 ± 3%                | GB1396V-3-200                                                                                                     | 1,388,100               | 4,000Ω @ 200°C                 | V         | 4557 ± 3%                |
| Dissipation factor (δ) is 1.5mW/°C<br>Time constant (τ) is 18 sec nominally<br>Max operating temperature is 300°C |                         |                                |           |                          | Dissipation factor (δ) is 0.75mW/°C<br>Time constant (τ) is 6 sec nominally<br>Max operating temperature is 300°C |                         |                                |           |                          |

Standard resistance tolerance is ±3% at rated temperature

\*See R/T tables on opposite page

Basic P/N

Material

Tol. Code

Point-match Temperature (°C) (only used if other than 25°C)

Examples: GC1074U-3-0 ..... Curve U material, ±3% at 0°C  
GB1396V-3-200 ..... Curve V material, ±3% at 200°C

### Resistance vs. Temperature Conversion Table Radial Leaded Glass Encapsulated NTC Thermistor

| SS&C Type                              | G_2183  | G_5373  | G_1074  | G_4914  | G_9864    | G_2315  | G_1396    |
|----------------------------------------|---------|---------|---------|---------|-----------|---------|-----------|
| Material                               | T       | U       | U       | A       | N         | R       | V         |
| Beta ( $\beta_{25/85}$ )               | 3420    | 3480    | 3480    | 3992    | 4066      | 4240    | 4557      |
| Temp. Coef.<br>@25°C ( $\alpha_{25}$ ) | -3.75   | -3.82   | -3.82   | -4.42   | -4.46     | -4.64   | -4.99     |
| Resistance Ratio<br>$R_0/R_{50}$       | 6.59    | 6.81    | 6.81    | 9.22    | 9.47      | 10.30   | 12.34     |
| Temperature<br>(°C)                    | Res (Ω) | Res (Ω) | Res (Ω) | Res (Ω) | Res (Ω)   | Res (Ω) | Res (Ω)   |
| -50                                    | 77,582  | 203,980 | 407,960 |         |           |         |           |
| -40                                    | 43,340  | 112,540 | 225,090 |         |           |         |           |
| -30                                    | 25,166  | 64,632  | 129,260 |         |           |         |           |
| -25                                    | 19,433  | 49,658  | 99,316  | 657,350 | 1,317,400 |         |           |
| -20                                    | 15,132  | 38,481  | 76,963  | 487,370 | 980,540   |         |           |
| -10                                    | 9,392   | 23,672  | 47,344  | 276,060 | 558,640   |         |           |
| 0                                      | 6,000   | 15,000  | 30,000  | 162,210 | 329,400   | 806,460 |           |
| 10                                     | 3,935   | 9,765   | 19,531  | 98,322  | 198,900   | 478,760 |           |
| 20                                     | 2,644   | 6,516   | 13,033  | 61,465  | 123,750   | 292,850 |           |
| 25                                     | 2,186   | 5,369   | 10,739  | 49,120  | 98,633    | 231,440 | 1,388,100 |
| 30                                     | 1,817   | 4,448   | 8,896   | 39,517  | 79,126    | 184,110 | 1,085,000 |
| 40                                     | 1,274   | 3,100   | 6,201   | 26,065  | 51,870    | 118,680 | 676,470   |
| 50                                     | 910.6   | 2,203   | 4,406   | 17,599  | 34,790    | 78,291  | 432,530   |
| 60                                     | 662.2   | 1,593   | 3,187   | 12,140  | 23,831    | 52,757  | 283,030   |
| 70                                     | 489.5   | 1,171   | 2,343   | 8,641   | 16,643    | 36,258  | 189,200   |
| 80                                     | 367.4   | 874.6   | 1,749   | 6,120   | 11,834    | 25,376  | 129,000   |
| 85                                     | 319.9   | 759.8   | 1,520   | 5,213   | 10,042    | 21,366  | 107,250   |
| 90                                     | 279.6   | 662.3   | 1,325   | 4,459   | 8,556     | 18,064  | 89,570    |
| 100                                    | 215.6   | 508.3   | 1,016   | 3,300   | 6,282     | 13,062  | 63,256    |
| 110                                    | 168.4   | 394.9   | 789.8   | 2,478   | 4,679     | 9,585   | 45,382    |
| 120                                    | 133.0   | 310.4   | 620.8   | 1,886   | 3,532     | 7,131   | 33,041    |
| 125                                    | 118.6   | 276.3   | 552.7   | 1,653   | 3,083     | 6,181   | 28,339    |
| 130                                    | 106.1   | 246.7   | 493.3   | 1,453   | 2,700     | 5,373   | 24,387    |
| 140                                    | 85.61   | 198.0   | 396.0   | 1,133   | 2,088     | 4,098   | 18,232    |
| 150                                    | 69.71   | 160.5   | 320.9   | 892.8   | 1,632     | 3,161   | 13,796    |
| 160                                    | 57.27   | 131.2   | 262.5   | 710.9   | 1,289     | 2,464   | 10,557    |
| 170                                    | 47.46   | 108.3   | 216.5   | 571.6   | 1,028     | 1,940   | 8,164     |
| 180                                    | 39.64   | 90.01   | 180.0   | 463.7   | 827.8     | 1,542   | 6,377     |
| 190                                    | 33.36   | 75.40   | 150.8   | 379.3   | 672.0     | 1,237   | 5,028     |
| 200                                    | 28.28   | 63.62   | 127.3   | 312.8   | 550.0     | 1,000   | 4,000     |
| 225                                    |         |         |         | 199.5   | 344.3     | 608.3   | 2,339     |
| 250                                    |         |         |         | 132.6   | 224.7     | 386.5   | 1,432     |
| 275                                    |         |         |         | 91.29   | 152.1     | 255.2   | 912.7     |
| 300                                    |         |         |         | 64.87   | 106.4     | 174.3   | 602.6     |

This R/T Conversion Table is provided for reference only. SS&C uses the Steinhart-Hart equation to calculate the nominal  $R_t/R_{25}$  value. 1°C tables are available upon request.

- $\alpha_{25}$  - Negative Temperature Coefficient of Resistance at 25°C expressed in %/°C. This is the percentage change in thermistor resistance for a 1°C change in its' body temperature at 25°C.  $\alpha$  is particularly useful in calculating the required resistance tolerance necessary to guarantee sensor accuracy.  $\alpha$  at temperatures other than 25°C is available upon request as tables in 1°C increments.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331