

# MA4EX600L1-1225T



Silicon Double Balanced HMIC Mixer  
1700 – 2500 MHz

Rev. V1

## Features

- SOT-25 Low Cost Miniature Plastic Package
- 6.4 dB Typical Conversion Loss @ 5000 MHz
- + 3 to + 7 dBm LO Drive
- HMIC™ Patented Process
- NO External Matching Required
- Double Balanced Passive Mixer
- Lead Free ( RoHS Compliant ) with 260 °C Reflow Capability
- 100 % Matte Tin Plating

## Description

M/A-COM's MA4EX600L1-1225T is a silicon monolithic 4.2 – 6.0GHz double balanced mixer in a low cost miniature surface mount SOT-25 package. The die uses M/A-COM's unique HMIC silicon/glass process to realize low loss passive elements while retaining the advantages of low barrier silicon Schottky diodes.


## Applications

These mixers are well suited for high volume WLL and WLAN applications where small size and repeatability are required. Typical applications include frequency conversion, modulation, and demodulation in wireless receivers and transmitters.

## Electrical Specifications @ +25°C

Parameter	Frequency Range	Test Conditions	Units	Min.	Typ.	Max.
Conversion Loss	5000 MHz 4.2 - 6.0 GHz	LO Drive = +5 dBm RF = -10 dBm, IF = 60 MHz	dB	-	6.4 6.8	8.0 9.5
L - R Isolation	5000 MHz 4.2 - 6.0 GHz	LO Drive = +5 dBm	dB	-	26 25	-
L - I Isolation	5000 MHz 4.2 - 6.0 GHz	LO Drive = +5 dBm	dB	-	24 23	-
R - I Isolation	5000 MHz 4.2 - 6.0 GHz	LO Drive = +5 dBm RF Level = - 10 dBm	dB	-	13 15	-
RF VSWR	5000 MHz 4.2 - 6.0 GHz	LO Drive = +5 dBm RF Level = - 10 dBm	Ratio	-	1.18:1 1.67:1	-
LO VSWR	5000 MHz 4.2 - 6.0 GHz	LO Drive = +5 dBm	Ratio	-	1.87:1 1.89:1	-
IF VSWR	10 - 2000 MHz	LO Drive = +5 dBm IF Level = 0 dBm	Ratio	-	1.55:1	-
Input IP3	5000 MHz 4.2 - 6.0 GHz	LO Drive = +5 dBm RF = -10 dBm, IF = 60 MHz	dBm	-	5.7 7.6	-
Input 1 dB Compression Power	5000 MHz 4.2 - 6.0 GHz	LO Drive = +5 dBm IF = 60 MHz	dBm	-	0.3 0.8	-
IF 1 dB Bandwidth	DC - 2000 MHz	LO = 5000 MHz @+5dBm	MHz	0	-	2000

## SOT-25 Package Outline ( Topview )



## PIN Configuration

PIN	Function	PIN	Function
1	RF	4	GND
2	GND	5	IF
3	LO	—	—

## Ordering Information

Model No.	Package
MA4EX600L1-1225T	Tape and Reel

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.  
**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400  
• India Tel: +91.80.43537383 • China Tel: +86.21.2407.1588  
Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

# MA4EX600L1-1225T




Silicon Double Balanced HMIC Mixer  
1700 – 2500 MHz


Rev. V1

## Typical Performance Curves (LO Drive = + 5 dBm, RF = -10dBm, IF = 60MHz)


### Conversion Loss

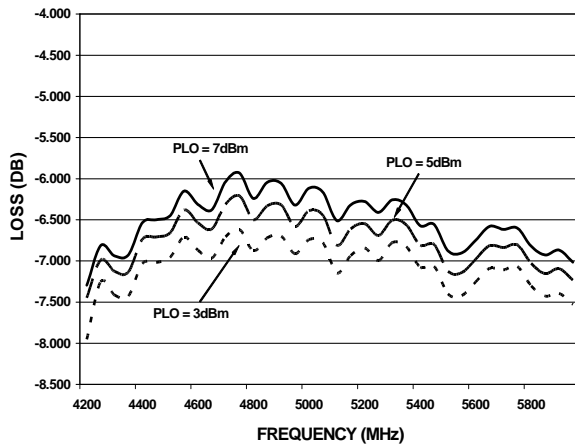


### Isolation

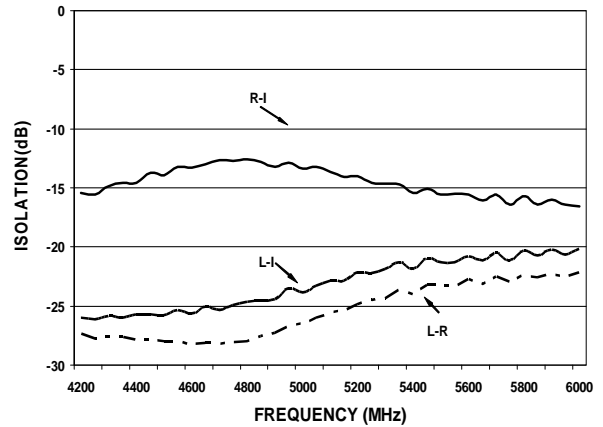

### VSWR

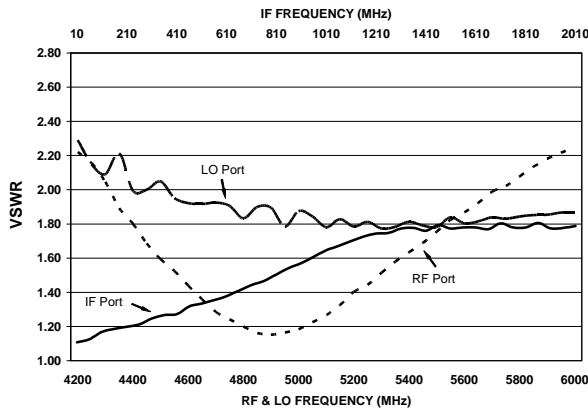

### Input IP3 & 1dB Compression Power

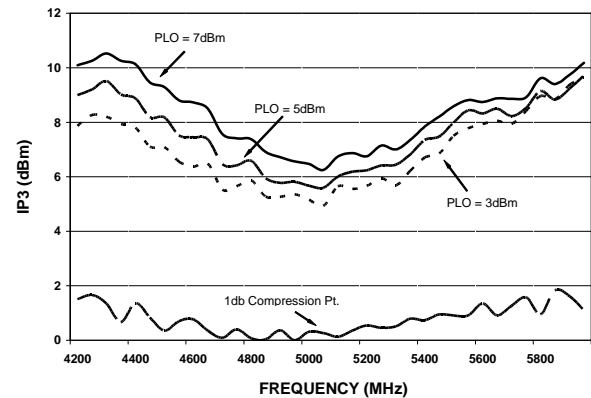

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.  
**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400  
• India Tel: +91.80.43537383 • China Tel: +86.21.2407.1588  
Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

# MA4EX600L1-1225T




Silicon Double Balanced HMIC Mixer  
1700 – 2500 MHz

Rev. V1

## Case Style

### SOT-25

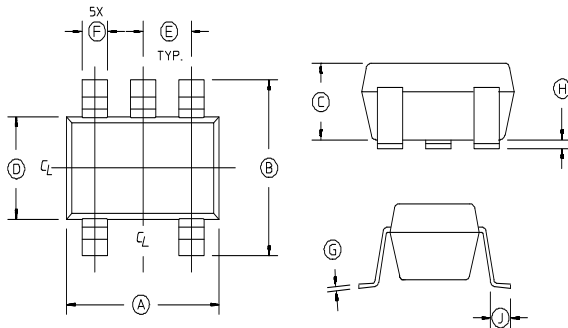

### SOT-25

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.1103	.1181	2.80	3.10
B	.1023	.1181	2.6	3.00
C	0.0355	.0512	0.9	1.30
D	0.0591	.0669	1.5	1.70
E	.0374 REF.		0.95 REF.	
F	.0138	.0197	.35	.50
G	.0031	0.0079	.08	0.2
H	.0002	.0059	.05	.15
J	.0138	.0216	.35	.55


1. Dimensions do not include mold flas, protrusion or gate burrs which shall not exceed 0.0098 in (.25mm) per side.
2. Leads Coplanarity should be 0.003 (0.08) max.

## Absolute Maximum Ratings 1

Parameter	Maximum Ratings
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C
Incident LO Power	+20 dBm
Incident RF Power	+20 dBm
Soldering Temperature	+260°C max.

1. Exceeding these limits may cause permanent damage.
- \* Please refer to application note M538 for surface mounting instructions.

## Schematic

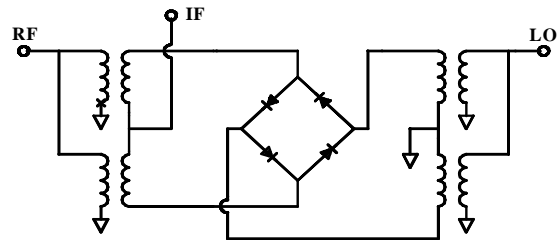



## Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

### Наши контакты:

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331