

X7R Dielectric

General Specifications



X7R formulations are called "temperature stable" ceramics and fall into EIA Class II materials. X7R is the most popular of these intermediate dielectric constant materials. Its temperature variation of capacitance is within $\pm 15\%$ from -55°C to $+125^{\circ}\text{C}$. This capacitance change is non-linear.

Capacitance for X7R varies under the influence of electrical operating conditions such as voltage and frequency.




X7R dielectric chip usage covers the broad spectrum of industrial applications where known changes in capacitance due to applied voltages are acceptable.



PART NUMBER (see page 2 for complete part number explanation)

0805	5	C	103	M	A	T	2	A
Size (L" x W")	Voltage 4V = 4 6.3V = 6 10V = Z 16V = Y 25V = 3 50V = 5 100V = 1 200V = 2 500V = 7	Dielectric X7R = C	Capacitance Code (In pF) 2 Sig. Digits + Number of Zeros	Capacitance Tolerance J = $\pm 5\%^*$ K = $\pm 10\%$ M = $\pm 20\%$ * $\leq 1\mu\text{F}$ only, contact factory for additional values	Failure Rate A = Not Applicable	Terminations T = Plated Ni and Sn 7 = Gold Plated* Z = FLEXITERM [®] ** *Optional termination **See FLEXITERM [®] X7R section	Packaging 2 = 7" Reel 4 = 13" Reel 7 = Bulk Cass. 9 = Bulk	Special Code A = Std. Product
							Contact Factory For Multiples	

NOTE: Contact factory for availability of Termination and Tolerance Options for Specific Part Numbers.
Contact factory for non-specified capacitance values.

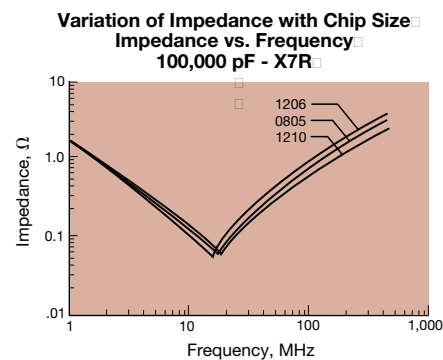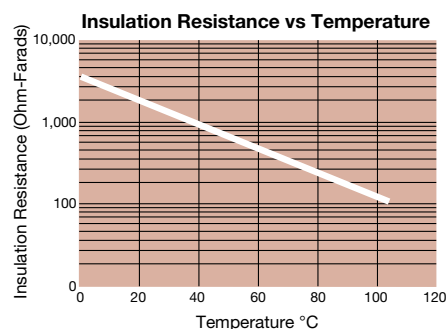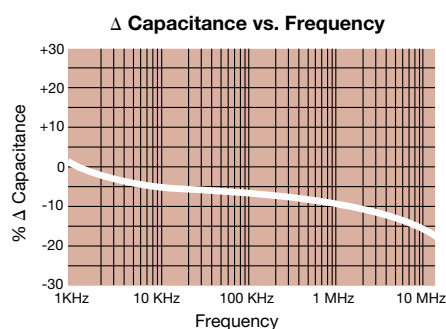

Specifications and Test Methods

Parameter/Test		X7R Specification Limits	Measuring Conditions	
Operating Temperature Range		-55°C to +125°C	Temperature Cycle Chamber	
Capacitance		Within specified tolerance	Freq.: 1.0 kHz $\pm$ 10% Voltage: 1.0Vrms $\pm$.2V	
Dissipation Factor		$\leq 2.5\%$ for $\geq 50V$ DC rating $\leq 3.0\%$ for 25V DC rating $\leq 3.5\%$ for 25V and 16V DC rating $\leq 5.0\%$ for $\leq 10V$ DC rating		
Insulation Resistance		100,000M Ω or 1000M Ω - μ F, whichever is less	Charge device with rated voltage for 120 $\pm$ 5 secs @ room temp/humidity	
Dielectric Strength		No breakdown or visual defects	Charge device with 300% of rated voltage for 1-5 seconds, w/charge and discharge current limited to 50 mA (max) Note: Charge device with 150% of rated voltage for 500V devices.	
Resistance to Flexure Stresses	Appearance	No defects	Deflection: 2mm Test Time: 30 seconds 	
	Capacitance Variation	$\leq \pm 12\%$		
	Dissipation Factor	Meets Initial Values (As Above)		
	Insulation Resistance	$\geq$ Initial Value x 0.3		
Solderability		$\geq 95\%$ of each terminal should be covered with fresh solder	Dip device in eutectic solder at 230 $\pm$ 5°C for 5.0 $\pm$ 0.5 seconds	
Resistance to Solder Heat	Appearance	No defects, <25% leaching of either end terminal	Dip device in eutectic solder at 260°C for 60 seconds. Store at room temperature for 24 $\pm$ 2 hours before measuring electrical properties.	
	Capacitance Variation	$\leq \pm 7.5\%$		
	Dissipation Factor	Meets Initial Values (As Above)		
	Insulation Resistance	Meets Initial Values (As Above)		
	Dielectric Strength	Meets Initial Values (As Above)		
Thermal Shock	Appearance	No visual defects	Step 1: -55°C $\pm$ 2°	30 $\pm$ 3 minutes
	Capacitance Variation	$\leq \pm 7.5\%$	Step 2: Room Temp	≤ 3 minutes
	Dissipation Factor	Meets Initial Values (As Above)	Step 3: +125°C $\pm$ 2°	30 $\pm$ 3 minutes
	Insulation Resistance	Meets Initial Values (As Above)	Step 4: Room Temp	≤ 3 minutes
	Dielectric Strength	Meets Initial Values (As Above)	Repeat for 5 cycles and measure after 24 $\pm$ 2 hours at room temperature	
Load Life	Appearance	No visual defects	Charge device with 1.5 rated voltage ($\leq 10V$) in test chamber set at 125°C $\pm$ 2°C for 1000 hours (+48, -0) Remove from test chamber and stabilize at room temperature for 24 $\pm$ 2 hours before measuring.	
	Capacitance Variation	$\leq \pm 12.5\%$		
	Dissipation Factor	$\leq$ Initial Value x 2.0 (See Above)		
	Insulation Resistance	$\geq$ Initial Value x 0.3 (See Above)		
	Dielectric Strength	Meets Initial Values (As Above)		
Load Humidity	Appearance	No visual defects	Store in a test chamber set at 85°C $\pm$ 2°C/ 85% $\pm$ 5% relative humidity for 1000 hours (+48, -0) with rated voltage applied. Remove from chamber and stabilize at room temperature and humidity for 24 $\pm$ 2 hours before measuring.	
	Capacitance Variation	$\leq \pm 12.5\%$		
	Dissipation Factor	$\leq$ Initial Value x 2.0 (See Above)		
	Insulation Resistance	$\geq$ Initial Value x 0.3 (See Above)		
	Dielectric Strength	Meets Initial Values (As Above)		

X7R Dielectric

Capacitance Range



PREFERRED SIZES ARE SHADED

SIZE		0101		0201		0402		0603						0805						1206											
Soldering		Reflow Only		Reflow Only		Reflow/Wave		Reflow/Wave						Reflow/Wave						Reflow/Wave											
Packaging		Paper/Embossed		All Paper		All Paper		All Paper						Paper/Embossed						Paper/Embossed											
(L) Length	mm (in.)	0.40 ± 0.02 (0.016 ± 0.0008)		0.60 ± 0.03 (0.024 ± 0.001)		1.00 ± 0.10 (0.040 ± 0.004)		1.60 ± 0.15 (0.063 ± 0.006)						2.01 ± 0.20 (0.079 ± 0.008)						3.20 ± 0.20 (0.126 ± 0.008)											
(W) Width	mm (in.)	0.20 ± 0.02 (0.008 ± 0.0008)		0.30 ± 0.03 (0.011 ± 0.001)		0.50 ± 0.10 (0.020 ± 0.004)		0.81 ± 0.15 (0.032 ± 0.006)						1.25 ± 0.20 (0.049 ± 0.008)						1.60 ± 0.20 (0.063 ± 0.008)											
(t) Terminal	mm (in.)	0.20 ± 0.02 (0.008 ± 0.0008)		0.15 ± 0.05 (0.006 ± 0.002)		0.25 ± 0.15 (0.010 ± 0.006)		0.35 ± 0.15 (0.014 ± 0.006)						0.50 ± 0.25 (0.020 ± 0.010)						0.50 ± 0.25 (0.020 ± 0.010)											
	WVDC	10		10	16	25	16	25	50	6.3	10	16	25	50	100	200	6.3	10	16	25	50	100	200	6.3	10	16	25	50	100	200	500
Cap (pF)	100	A		A	A	A																									
	150	A		A	A	A																									
	220	A		A	A	A			C																						
	330	A		A	A	A								G	G	G			J	J	J	J	J	J							K
	470	A		A	A	A								G	G	G			J	J	J	J	J	J							K
	680	A		A	A	A									G	G	G			J	J	J	J	J	J						
	1000	A		A	A									G	G	G			J	J	J	J	J	J							K
	1500			A										G	G	G			J	J	J	J	J	J		J	J	J	J	J	M
	2200														G	G			J	J	J	J	J	J		J	J	J	J	J	M
	3300			A										G	G	G			J	J	J	J	J	J		J	J	J	J	J	M
	4700			A											G	G			J	J	J	J	J	J		J	J	J	J	J	M
	6800			A											G	G			J	J	J	J	J	J		J	J	J	J	J	P
Cap (µF)	0.010			A										G	G				J	J	J	J	J	J		J	J	J	J	J	P
	0.015													G	G				J	J	J	J	J	J		J	J	J	J	M	
	0.022														G	G				J	J	J	J	N		J	J	J	J	M	
	0.033													G	G				J	J	J	J	N			J	J	J	J	M	
	0.047													G	G				J	J	J	J	N			J	J	J	J	M	
	0.068													G	G				J	J	J	J	N			J	J	J	J	P	
	0.10													G	G				J	J	J	J	N			J	J	J	M	P	
	0.15													G					J	J	J	N	N			J	J	J	Q		
	0.22														J*					J	J	N	N	N			J	J	J	Q	
	0.33														J*					N	N	N	N	N			J	M	P	Q	
	0.47																		N	N	N	N	N			M	M	P	Q		
	0.68																		N	N	N					M	M	Q	Q		
	1.0													J*	J*					N	N	N	N			M	M	Q	Q		
	1.5																			N	N					P	Q	Q			
	2.2														J*							P*				Q	Q	Q		Q*	
	3.3																														
	4.7																														
	10																														
	22																														
	47																														
	100																														
	WVDC	10		10	16	25	16	25	50	6.3	10	16	25	50	100	200	6.3	10	16	25	50	100	200	6.3	10	16	25	50	100	200	500
SIZE		0101		0201		0402		0603						0805						1206											
Letter	A	C		E		G		J		K		M		N		P		Q		X		Y		Z							
Max. Thickness	0.33 (0.013)	0.56 (0.022)		0.71 (0.028)		0.90 (0.035)		0.94 (0.037)		1.02 (0.040)		1.27 (0.050)		1.40 (0.055)		1.52 (0.060)		1.78 (0.070)		2.29 (0.090)		2.54 (0.100)		2.79 (0.110)							
	PAPER									EMBOSS																					

*Optional Specifications – Contact factory

X7R Dielectric

Capacitance Range



PREFERRED SIZES ARE SHADED

SIZE		1210						1812				1825		2220				2225											
Soldering		Reflow Only						Reflow Only				Reflow Only		Reflow Only				Reflow Only											
Packaging		Paper/Embossed						All Embossed				All Embossed		All Embossed				All Embossed											
(L) Length	mm (in.)	3.20 ± 0.20 (0.126 ± 0.008)						4.50 ± 0.30 (0.177 ± 0.012)				4.50 ± 0.30 (0.177 ± 0.012)		5.70 ± 0.40 (0.225 ± 0.016)				5.72 ± 0.25 (0.225 ± 0.010)											
(W) Width	mm (in.)	2.50 ± 0.20 (0.098 ± 0.008)						3.20 ± 0.20 (0.126 ± 0.008)				6.40 ± 0.40 (0.252 ± 0.016)		5.00 ± 0.40 (0.197 ± 0.016)				6.35 ± 0.25 (0.250 ± 0.010)											
(t) Terminal	mm (in.)	0.50 ± 0.25 (0.020 ± 0.010)						0.61 ± 0.36 (0.024 ± 0.014)				0.61 ± 0.36 (0.024 ± 0.014)		0.64 ± 0.39 (0.025 ± 0.015)				0.64 ± 0.39 (0.025 ± 0.015)											
	WVDC	10	16	25	50	100	200	500	50	100	200	500	50	100	25	50	100	200	50	100									
Cap (pF)	100																												
	150																												
	220																												
	330																												
	470																												
	680																												
	1000																												
	1500	J	J	J	J	J	J	J	M																				
	2200	J	J	J	J	J	J	J	M																				
	3300	J	J	J	J	J	J	J	M																				
	4700	J	J	J	J	J	J	J	M																				
	6800	J	J	J	J	J	J	J	M																				
Cap (μF)	0.010	J	J	J	J	J	J	J	M	K	K	K	K	M	M		X	X	X	M	P								
	0.015	J	J	J	J	J	J	J	P	K	K	K	P	M	M		X	X	X	M	P								
	0.022	J	J	J	J	J	J	J	Q	K	K	K	P	M	M		X	X	X	M	P								
	0.033	J	J	J	J	J	J	J	Q	K	K	K	X	M	M		X	X	X	M	P								
	0.047	J	J	J	J	J	J	J		K	K	K	Z	M	M		X	X	X	M	P								
	0.068	J	J	J	J	J	J	M		K	K	K	Z	M	M		X	X	X	M	P								
	0.10	J	J	J	J	J	J	M		K	K	K	Z	M	M		X	X	X	M	P								
	0.15	J	J	J	J	M	Z			K	K	P		M	M		X	X	X	M	P								
	0.22	J	J	J	J	P	Z			K	K	P		M	M		X	X	X	M	P								
	0.33	J	J	J	J	Q	Q			K	M	X		M	M		X	X	X	M	P								
	0.47	M	M	M	M	Q	Q			K	P			M	M		X	X	X	M	P								
	0.68	M	M	P	X	X				M	Q			M	P		X	X		M	P								
	1.0	N	N	P	X	Z				M	X			M	P		X	X		M	P								
	1.5	N	N	Z	Z	Z				Z	Z			M			X	X		M	X								
	2.2	X	X	Z	Z	Z				Z	Z						X	X		M									
	3.3	X	X	Z	Z					Z							X	Z											
	4.7	X	X	Z	Z					Z							X	Z											
	10	Z	Z	Z*													Z												
	22	Z*	Z*												Z														
	47																												
	100																												
	WVDC	10	16	25	50	100	200	500	50	100	200	500	50	100	25	50	100	200	50	100									
SIZE		1210						1812				1825		2220				2225											
Letter Max. Thickness	A	C						E		G		J		K		M		N		P		Q		X		Y		Z	
	0.33 (0.013)	0.56 (0.022)						0.71 (0.028)		0.90 (0.035)		0.94 (0.037)		1.02 (0.040)		1.27 (0.050)		1.40 (0.055)		1.52 (0.060)		1.78 (0.070)		2.29 (0.090)		2.54 (0.100)		2.79 (0.110)	
	PAPER						EMBOSS																						

*Optional Specifications – Contact factory



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331