# OMRON

NEW

# Vision sensor with built-in LCD monitor

"Smart Sensor" ZFX-C



"Essential Innovation for Future Generations"

realrzing

# **Easy Vision Being Our Vision**

The Omron's new ZFX-C Smart Vision Sensor is a total Image Processing system that includes everything from a camera with an integrated light source to an image-processing unit.

With Omron's newly developed proprietary measurement algorithm, the parameter can be set through only a few steps involving the operation of a touch-panel color monitor.

This "Smart" user interface provides simplicity of usage giving anyone all they can need to perform a complete image enhancement.

The new technology and style of the ZFX-C paves the way to a new era of vision sensors.




# "Smart Recipe" with condensed know-how World's first

Capturing the image processing know-how Omron has accumulated over many years, the world's first "Smart Recipe" has radically reduced setting up time allowing for greater productivity.

#### One-touch automatic setting

The essential skills for image processing are now packaged into Omron's unique algorithm. The setting that traditionally required much fumbling is now made easy with the "select from auto listed options" using recipes. Lighting setup, the longtime problem for image processing, and the tricky parameter details involved in measurement setup, can now be done automatically with just the flip of a switch.



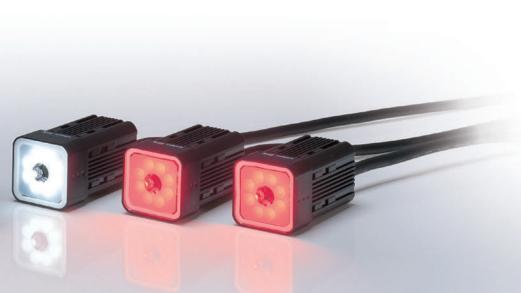



# Smart Recipe

Smart Recipe is on Omron's invention of 3-step setting procedure. By adopting a new algorithm to encapsulate "human know-how", the auto setup for lighting and measurement now possible. Anyone can rapidly perform a high level of image processing.




Patent pending

The know-how and trial and error that have been indispensable and required much time and effort up to now in lighting setup is now an automated process. By just selecting the best one from the candidate images automatically captured by changing the lighting pattern with the auto-lighting, anyone can easily find the optimal lighting. User can now easily determine settings for shiny work with high degrees of reflection and black monochrome work with low degrees of reflection, something very tricky before. In addition, when a more detailed setup is needed, the customized setup can be used to incorporate know-how.




With automatic lighting setup, user can simply select the best image from thumbnail of candidate images.



A more detailed set up is possible with the customized lighting setup while looking at the image.

#### Built-in lighting camera that enables an advanced automatic lighting




The Built-in lighting camera and improved controller brings about an even higher degree of automatic lighting. With this camera you can produce up to a maximum of 1296 patterns of reflective lighting making the chore of choosing lighting equipment unnecessary. The lighting setup can be managed as digital data so it is possible to store the optimal setup for each job, and it smoothly handles the changing of settings. It is also possible to fine-tune the customized setup can be added.





# Step2 Choose measurement icon

The measurement method can be specified by just choosing the icon from out of a total of 9 measurement items for different types of inspection.

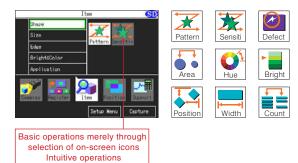




## Draw region, press and go

Just specify the region of interest and press Auto key and the system will determine the most suitable parameters for the target image.

Now anyone can easily perform a complex and advanced parameter setting which used to require special knowledge and cumbersome steps.


Customized setting is also possible by fine tuning the parameters automatically set up. The time required to set up parameters can be significantly reduced.

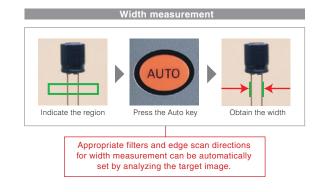

#### Easily adjusts position

# 3-step position correction

Even when the position of work changes due to the conveyer condition, the excellent position correction function can come into play allowing adjustment using the work contours, two stage position correction and so on. With the auto setup, position difference can be easily adjusted to enable stable measurement.

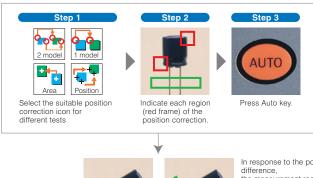





In response to the position difference, the measurement region is automatically adjusted.

# **Tailored** Measurement item

Including two shape measurement items, the system contains 5 categories and 9 types of Shape, Size, Edge, Bright and Hue, Application measurement items. It responds to the variety of inspection requirements in the manufacturing sites.

#### Shape measurement item

## Pattern search

#### Fastest in the industry

NEW

The shape measurement is a fundamental algorithm for image processing. By adopting a new image processor, the pattern search achieves a balance in the three factors of speed,

precision and stabilization, something that was an arduous task until now. It now supports a 360-degree revolving search and a sub-pixel processing of 1000 to 1 pixel units as well as a multi area searcher. The robust pattern search can respond to the multitude of inspects and measurements of any application.



A further improvement is the balance achieved in revolving searches that occur in pattern matching for a revolving work. The most time-consuming 360-degree revolving search can be performed with an excellent accuracy.

## Sensitive search

When it comes to the difficult processing of detecting small differences, the Omron's

unique sensitive search matches work at a smallest detail and in doing so makes such detection all the more possible.It resists variations in position and density to capture even the smallest detail in the complex patterns.



It is possible to detect even the smallest differences in the work

#### Application specific measurement item —

Defect

It is used to detect smears, scratches, chipping and burrs on the work. Defects are displayed on the screen, which makes it ideal tool for visual inspection.





Almost indistinguishable Counts the number of scratches can be detected after enhancing contrast using the color filter.

#### Size measurement item

Region

Detects the existence of work within a region and measures its size based on the area to perform various classification.



LED illumination is determined based on the area of extracted color.






#### Bright and Hue measurement item

# Hue


The three factors in color, i.e. hue, saturation and brightness value, are measured and digitalized. And whilst an accurate differentiation of the color is performed, it is also possible to measure the color variety with the deviation measurement function (with color camera connected).



The individual threshold for the hue, saturation and brightness value parameters can be set up so that even if one of them is different, it can be detected accurately and intensely. On the other hand, by expanding the range for the brightness value and saturation, and so on, it is possible to stabilize the color detection in the hue without any interference from illumination alterations.

## Bright

Measures the brightness within a region. It can be used for checking the presense of a component etc., by generating average density and density deviation values.



Based on the change in brightness, the presense of a screw (OK or NG) is determined.

#### Functions to support optimal measurements

#### Up to 32 regions

In one captured image, it is possible to measure a multiple up to 32 regions. When carrying out difficult inspection, it is possible to set-up a color filter and color extraction for each measurement item.

#### Smear check check check check check check

#### Measures three regions

Screen registration function

It is possible to register the image used in the setup. When you use the live image during setup sometimes the set up is not correct due to position differences in the work. However, with the registered image saved in the SD memory card as a "master image for setup", it can be easily verified when abnormal measurements occur.

#### Edge measurement item

## Position

NEW

The existence or not and the position of the edge is measured. Oblique edges can now be measured even in complex conditions and even more

accurate position measurements can be taken. The peak bottom measurement function that can accurately capture the edges is now supported.

## Width



The width of the edge is measured. By using the edge partitioning method, it is possible to measure the maximum and minimum width.



The number of edges inside the area is counted. Based on the number of edges on the pre-registered good model, it counts the edges in the area and determines the correctness.



Gray filtering setup using double screen

For each measurement item, it is possible to run 8 types of gray filtering such as expansion and contraction to enable stable measurements. Through the "setup while looking" option that makes it possible to check the preview, the optimal gray filtering can be selected.

#### Calculations function

It is possible to make arithmetical calculations for measurement values, and calculations involving general functions, trigonometry, geometrical functions and logical functions. It is possible to setup internal variables, and complex calculations can be carried out.





# Visualized Controller

Smallest in class controller build in embedded LCD saves space and time.

# Visualized setting and monitoring


Smallest in class

Despite its small form factor, the enlarged screen significantly improves the visibility and the ease of operation. The method of operation can be selected from 3way - the touch pen, key pad or console.



#### **Rich interface support**

Automatically detects the connected camera and displays the appropriate menu. With rich selection of interface including parallel RS-232C/RS-422, USB 2.0, the extensibility is superior.

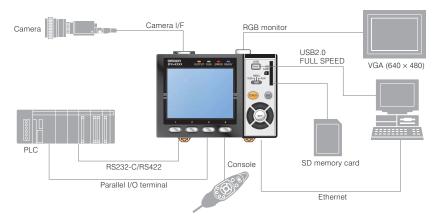





# **Intensive** camera solutions

8 types of cameras that can be selected for different types of work to achieve optimal measurement.

#### Built-in lighting camera Triple-speed camera (IP65)

Line up of 6 types of built-in lighting cameras that do not need lighting selection or setup. The color camera can respond to a wide range of work with a 5-150mm field of view. Through image compression and partial capturing, it can support a high-speed line.



#### C-mount camera unit NEW Triple-speed camera

This product line includes C-mount camera that can select the lens to match the field. It can be used in combination with optional lighting such as transmitted lighting, low angle lighting and bar lighting, etc. to support different inspection types.



#### Innovative triple-speed camera

#### Fastest in the industry

Performs fast transfer of 11.1ms that are 3 times faster than standard cameras and 1.5 times faster than high-speed cameras while maintaining a resolution of the whole screen. In addition, a super speed, minimum 3.2ms transfer is possible with image compressions and partial capturing.



#### Excellent ease of use

#### Flexible installation

Flexible installation supported for different mounting site conditions. It can be mounted on DIN rail as well as on the control panel surface. (Optional panel mount adapter available.)

#### Hybrid interface

wiring.





# advanced Color Engine

The ZFX-C's advanced auto-color processing ability makes stable and accurate measurements a reality, even for usually difficult to detect contrast and low lighting work.

# Automatic color filter

Even for images clearly distinguishable in color, when converted to monochrome the contrast tends to become low. Color filter analyzer automatically selects the optimal color filter (auto color filter) based on the image analysis result to adjust the contrast, to allow for stable image measurement. Any intermediate color can be arranged for the color filter using custom settings. Industry's first

NEW




# Choose desired color

#### Simply select from the list of colors

It is now possible to run an automatic pickup of color, something that used to be a


complex procedure, using simply the Auto key. The advanced color engine automatically detects the color distribution in the selected range and automatically lists up to 4 optional color pickup in the order of color area. After that, user can simply select the desired color to be pickup.

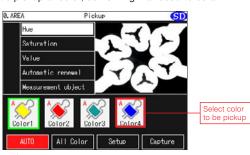

Specify the pickup area and press the Auto key to display 4 optional colors for pickup.

#### Fine-tuning by using dual-screen

The auto color pickup can fine-tune each of the hue, saturation and brightness value. Using double screens, the source image and the color pickup image can be compared and adjusted. This enables easy and stable pickup of colors with low illumination (traditionally difficult to pickup) and colors with large variation. The efficiency of operation is greatly increased.



Source image



# Versatile support tool

The concept behind Smart Recipe that eradicates the pain of image processing has been leveraged in the system ramp-up and deployment.


## Image storing and re-measurement

Stores up to 100 files of image data in the main memory without slowing measurement speed. Images data can be re-measured so even with a high-speed line, for example, the results of the measurements can be checked at leisure afterwards.



## On-site fine adjustment

On site variety adjustment of work is essential. Without returning to the menu mode, the measurement region, color contrast setup and so on can be tuned in adjust mode, using double screen to compare with the original image. The measurement results of the stored images can also be displayed so the unnecessary rejects can be efficiently reduced.



Variety adjustment can be controlled Simply using the adjust mode.

# Visualized monitoring and analysis


NEW

NEW

Through a list/individual view of measurement results, and a logging monitor display, user can easily understand the measurement situation. The results display can be

chosen from 9 patterns including

individual results view (upper left, upper middle), lists of results/region view (lower left, lower middle), list of results/All results view (upper right), and data list view (bottom right). The results can be reviewed in detail which is useful for statistical analysis.



Password function

It is possible to set up a password that alters between operating mode and other. This protects against operational errors at the manufacturing site.

#### Display capture function

Display images can be captured and stored in the SD memory card. Useful for report documentation.

#### Ordering Information

Controllers			
Appearance	Power supply	Circuit type	Model
1-camera model		NPN	ZFX-C10
	DC21.6 to 26.4V	PNP	ZFX-C15
2-camera model	DC21.0 10 20.4V	NPN	ZFX-C20
		PNP	ZFX-C25

Cameras

Appearance	Туре		Setting distance	Sensing area	Model	Remarks	
		Monochrome type	34mm to 49mm	4.9mm x 4.9mm to 8.9mm x 8.9mm(variable)	ZFX-SR10 ZFX-SR10R (See note.)		
		Monochrome type	38mm to 194mm	9.8mm x 9.8mm to 49mm x 49mm(variable)	ZFX-SR50 ZFX-SR50R (See note.)		
	Camera with lighting		34mm to 49mm	4.9mm x 4.9mm to 8.9mm x 8.9mm(variable)	ZFX-SC10 ZFX-SC10R (See note.)		
		Color type	31mm to 187mm	9.8mm x 9.8mm to 49mm x 49mm(variable)	ZFX-SC50 ZFX-SC50W(IP67) ZFX-SC50R (See note.)	Cable length:2m	
(ZFX-SC50)			67mm to 142mm	49mm x 49mm to 89mm x 89mm(variable)	ZFX-SC90 ZFX-SC90W(IP67) ZFX-SC90R (see note.)		
			115mm to 227mm	89mm x 89mm to 148mm x 148mm(variable)	ZFX-SC150 ZFX-SC150W(IP67) ZFX-SC150R (See note.)		
	Camora only	Monochrome type	The CCTV lens is selected according to the range of		ZFX-S A Camera C		
	Camera only Color type		detection and the installation distance.		ZFX-SC	is required.	

Note. Equipped with a robot cable.


#### Camera Cables

Туре		Cable length	Model
Camera Cable	Normal type	3m,8m	ZFX-VS
(See note 1.)	Robot cable type	3m	ZFX-VSR
Right-angle Camera Cable (See note 2.)	Normal type (bending direction: A)	3m,8m	ZFX-VSLA 3M/8M
	Robot cable type (bending direction: A)	3m	ZFX-VSRLA 3M
(000	Normal type (bending direction: B)	3m,8m	ZFX-VSLB 3M/8M
	Robot cable type (bending direction: B)	3m	ZFX-VSRLB 3M

Note 1: It is necessary for ZFX-S and ZFX-SC. ZFX-SR\_/SC\_ is a cable drawing out type, it doesn't use it. Note 2: Cable Bending Directions

Bending Direction A (Model numbers ending in "A")

The Cable bends downward at the Camera.



### Bending Direction B (Model numbers ending in "B") The Cable bends upward at the



The Cable bends toward the back panel at the Controller.



#### Camera extension cable

Туре		Cable length	Model
Camera	Normal type	3m	ZFX-XC3A (See note.1)
Extension	Normartype	8m	ZFX-XC8A (See note.1)
Cable	Robot cable type	3m	ZFX-XC3AR (See note.1)
Camera	Extension cable (See note 2.)	15m,25m	ZFX-XC_BR
Extension Cable (long-distance	Digital equalizer (camera side)	0.2m	ZFX-XEQ01
type)	Digital equalizer (Controller side)	0.2m	ZFX-XEQ02

Note: The total combined length of the cables connected to the Controller and camera must not exceed 28.4 m (including the camera cable). Note 1: Up to two camera extension cables can be connected to the camera cable as

Note 1: Op to two camera extension cables can be connected to the camera cable as long as the total cable length between the controller and the camera does not exceed 19 m. Note 2: Connect the ZFX-VS\_\_VSR\_\_ Camera Cable to the Camera and connect the ZFX-XC\_A/XC\_AR Extension Cable to the Controller.

#### Other cable

Туре	Cable length	Model
Parallel I/O Cable	2m,5m	ZFX-VP
	2m	ZFX-XPT2A
RS-232C Cable	5m	ZFX-XPT5A
	15m	ZFX-XPT15A
	2m	ZFX-XPT2B
RS-422 Cable	5m	ZFX-XPT5B
	15 m	ZFX-XPT15B
Monitor Cable	2m,5m	FZ-VM
Special USB cable	1.8 m	ZFX-XUSB

#### Accessories

Тур	e	Model			
Console		ZFX-KP (2m / 5m)			
LCD Monitor		FZ-M08			
Panel Mount Adapters		ZFX-XPM			
	bar lighting	ZFV-LTL01			
Optional Lighting	bar double-lighting	ZFV-LTL02			
(See note 1.)	bar low-angle lighting	ZFV-LTL04			
	light source for through beam	ZFV-LTF01			
CCTV Lenses /Ex	tension Tubes	3Z4S-LE series			
External Lighting		3Z4S-LT series			
Strobe Controller	(See note 2.)	Manufactured by MORITEX Corporation 3Z4S-LT MLEK-C100E1TSX			

Note 1:It is possible to ZFX-SC50 and ZFX-SC90 use it.

Note 2: It is possible to ZFX-S and ZFX-SC use it. It uses it so that the controller may control an external lighting. The Strobe Controller cannot be connected when using a Right-angle Camera Cable.

#### Specifications

Item			ZFX-C20	ZFX-C25	ZFX-C10H	ZFX-C15H	ZFX-C10	ZFX-C15
Number o	f connected camera	as	2		1			
Connecta	ble camera		ZFX-SR_/SC_/S/SC					
Processin	g resolution		When ZFX-SR_/SC_ is connected:464 (H) x464 (V) When ZFX-S/SC is connected:608 (H) x464 (V)					
		LCD monitor		_CD (320 x 240 pi				
Display Indicator		Indicator	"Measuring" indicator (color: green): RUN Trigger indicator (color: blue): ENABLE Judgment indicator (color: orange): OUTPUT Error indicator (color: red): ERROR					
		Input	12 points (RES	ET, DSA, DI0 to 8,	TRIG)			
	Parallel interface	Output	23 points (OR, ERROR, RUN, ENABLE, GATE, STGOUT0 to 1 (*1) , DO0 to 15)					
		Circuit type	NPN	PNP	NPN	PNP	NPN	PNP
		USB2.0	1 port, FULL SI	PEED, MINI-B con	nector		1	1
External	Serial interface	RS-232C	1 port, max. 11	5200 bps (cannot	be used simultane	ously with RS-422	interface)	
l/F		RS-422	1 port, max. 11	5200 bps (cannot l	be used simultane	ously with RS-232	C interface)	
	Network communications	Ethernet	1 port, 100BAS	E-TX/10BASE-T				
	Monitor output		Analog RGB ou	itput, 1 ch (resolut	ion VGA: 640 x 48	0)		
	Memory card I/F		SD card slot 1 of	ch				
Operation I/F		Touch panel, key operation, console connection						
	Number of registered banks		32 banks					
	Number of setup items		128 items/1 bar	۱k	32 items/1 bank			
		Shape inspection	Pattern search, sensitive serch, flexible search, grapgic search				Pattern search, sensitive search	
Main		Size inspection	Area, labeling				Area	
functions	Measurement items	Edge inspection	Position, width, count, angle				Position, width, count, angle	
	licinis	Brightness/color inspection	Brightness, HUE				Brightness, HUE	
		Application-based inspection	Defects, grouping				Defects	
	Position correction	ו	1 model search, 2 model search, position, area, labeling, angle			1 model search position, area, a		
Additional	Image memory fu	nction	Max. 100 images (when 2 cameras are connected, 50 images/camera)					
functions	Analysis function		Logging monitor					
Menu lan	guage		Japanese/English (can be switched)					
		Power supply voltage	21.6 to 26.4 VDC (including ripple)					
		Current consumption	1.5 A max.		1.2 A max.		1.0 A max.	
Ratings		Insulation resistance	Across all lead wires and controller case: 20 MΩ (by 250 V megger)					
		Dielectric strength	Across all lead wires and controller case, 1000 VAC, 50/60 Hz, 1 min					
		Ambient temperature range	Operating: 0 to + 50°C, Storage: -15 to +60°C (with no icing or condensation)					
		Ambient humidity range	Operating and storage: 35% to 85% (with no condensation)					
Operation	environment	Ambient atmosphere	No corrosive gases allowed					
robustnes	S	Degree of protection	IP20 (IEC60529	9)				
		Vibration resistance (durability)		ency: 10 to 150 Hz 0 m/s <sup>2</sup> 10 times for				
		Shock resistance (destructive)	Acceleration: 50 m/s <sup>2</sup> 10 times for 8 minutes in X, Y, and Z directons 150 m/s <sup>2</sup> 3 times each in 6 directions (up/down, left/right, forward/backward)					
Material			Case: Polycarb	onate (PC), Plate	face: PMMA			
Weight						Approx. 620 g		
Accessori	es		Touch pen (ZFX-TP), Exhaust unit (ZFX-EU), Terminal block adapter (ZFX-XTB) Terminal block adapter mounting screws (4 p'ces) , Ferrite core (2 p'ces), Instruction Sheet, and Power connector					

\*1 Only STGOUT0 is functional on the ZFX-C10H/C15H/C10/C15.

#### Specifications

#### Cameras

ameras									
Item		ZFX-SR10 /SR10R	ZFX-SR50 /SR50R	ZFX-SC10 /SC10R	ZFX-SC50 /SC50W /SC50R	ZFX-SC90 /SC90W /SC90R	ZFX-SC150 /SC150W /SC150R		
	ange (H x V)	4.9 mm x 4.9 mm to 8.9 mm x 8.9 mm	9.8 mm x 9.8 mm to 49 mm x 49 mm	4.9 mm x 4.9 mm to 8.9 mmx 8.9 mm	9.8 mm x 9.8 mm to 49 mm x 49 mm	49 mm x 49 mm to 89 mm x 89 mm	89 mm x 89 mm to 148 mm x 148 mm		
		(variable)	(variable)	(variable)	(variable)	(variable)	(variable)		
Setting dist	ance (L)	34 mm to 49 mm	38 mm to 194 mm	34 mm to 49 mm	31 mm to 187 mm	67 mm to 142 mm	115 mm to 227 mm		
		Setting distance (L)	Setting distance (L)	Setting distance (L)	Setting distance (L)	Setting distance (L)			
Relationshi	n between	49 <b>*</b>	194 mm	49 <b>*</b>	187 <b>•</b>	142 <b>*</b>	227 <b>*</b>		
setting dist	•	34	38	34	31 31	67	115		
detection ra		4.9mm 8.9mm	9.8mm 49mm	4.9mm 8.9mm	9.8mm 49mm	49mm 89mm	89mm 148mm		
		Detection range (H)	Detection range (H)	Detection range (H)	Detection range (H)	Detection range (H)	Detection range (H)		
Image capt	ure element	All-pixel capture inter-line transfer type 1/3" CCD (monochrome)					color)		
Effective nu	umber of pixels			659(H) x 494	+ (V)				
Pixel size				7.4 µm (H) x 7.4	μm (V)				
Shutter spe	ed			1/170s to 1/20	0000s				
Partial fund		O	F		1/2 partial,	1/4 partial			
Image rate		Fine, Norma	, High speed		Not av	ailable			
Frame rate	f entire screen)			90 fps					
Lens moun				(with Lo	ens)				
	Lighting method			Pulse lighti					
	LED	Red	LED		White	LED			
	Туре			Direct lighti	hting				
Lighting	Guide light	Available (center, n	neasurement region)		Not available				
	Optional lighting I/F	N	ot available		Available (ZF	-V-LT Series)	Not available		
	Indicator Class*1			Class 1	Class 2	Class 2	Class 1		
	Power supply voltage (supplied from Controller)		15 VDC		15 VDC, 48 VDC				
Ratings	Current consumption		Approx. 200 mA		Approx. 350 mA (15 VDC: approx. 150 mA, 48 VDC: approx. 200 mA) (including current consumption when optional lighting is connected)				
	Ambient temperature range		Operating: 0 to + 4	0°C, Storage: -20 to +65	'C (with no icing or condensation)				
	Ambient humidity range		Operating	and storage: 35% to 85	% (with no condensation	% (with no condensation)			
Operation	Ambient atmosphere			No corrosive gase	s allowed				
environment	Degree of protection	IP65 (IE	C60529)	ZFX-S	C: IP65 (IEC60529),	ZFX-SCW: IP67 (IEC	60529)		
obustness	Dielectric strength			1000 VAC 50 Hz/60	) Hz 1 min				
	Vibration resistance (durability)	1	0 to 150 Hz Single-amp	litude 0.35 mm 10 times	s for 8 min each in X, Y,	and Z directions			
	Shock resistance (destructive)		150 m/s <sup>2</sup> 3 times e	ach in 6 directions (up/o	lown, left/right, forward/	backward)			
Connectior	method			Cable built-in type (cab	le length: 2 m)				
Cable type				-SCOOR/SCOOR: Ro					
Material		ZFX-SR10/SR50/SC10/SC50/SC50W/SC90/SC90W/SC150/SC150W/SC150R: Case: ABS, mounting fixture: PBT ZFX-SR10R/SR50R/SC10R/SC50R/SC90R: Case: ABS, Mounting fixture (base): Aluminum, Mounting fixture (bracket): Stainless steel							
Weight		ZFX-SF10H/SH50H/SC10H: Approx. 2/0 g (including mounting fixture and cable) Tixture and cable) Tixture and cable) (including mounting fixture and cable) Tixture and cable)					Approx. 600 g (including mounting fixture and cable)		
Accessorie	s	ZFX-SR10/SR50/SC10: Mounting fixture (ZFV-XMF) 1 p'ce, Ferrite core 2 p'ce, Instruction Sheet ZFX-SC50/SC50W/SC90/SC90W: Mounting fixture (ZFV-XMF2) 1 p'ce, Ferrite core 2 p'ce, Warning label 1, Instruction Sheet Ferrite core 2 p'ce, Warning label 1, Instruction Sheet					Ferrite core 2 p'ces, Instruction Sheet		

\*1: Applicable standards IEC60825-1:1993 +A1:1997 +A2:2001, EN60825-1:1994 +A2:2001 +A1:2002

#### Specifications

#### Cameras


	ZFX-S (monochrome type)	ZFX-SC (color type)			
ange (H × V) etection range H v rance (L) p between ance and	The CCTV lens is selected according to the detection rar and the setting distance.				
ange					
ure element	inter-line transfer type 1/3" CCD (monochrome)	All-pixel capture inter-line transfer type 1/3" CCD (color)			
umber of pixels	659(H) x	: 494 (V)			
	7.4 µm (H) >				
ed	1/170s to				
tion ure)	Not available	1/2 partial, 1/4 partial			
function	Fine, Normal, High speed	Not available			
of entire screen)	90 C.m	-			
	011	ount			
LED					
Туре	—	_			
Guide light					
Optional lighting I/F	Available External lighting: 3Z4S-LT Series Flash Controller: made by Moritex Corporation 3Z4S-LT MLEK-C100E1TSX				
Indicator Class*1					
Power supply voltage (supplied from Controller)	15 VDC, 48 VDC				
Current consumption	Approx. 160 mA				
Ambient temperature range	Operating: 0 to + 50°C, Storage: -25 to +65°C (with no icing or condensation)				
Ambient humidity range	Operating and storage: 35% to				
Ambient atmosphere	No corrosive o				
		,			
Vibration resistance	500VAC 50 Hz/60Hz 1 min 10 to 150 Hz Single-amplitude 0.35 mm 10 times				
Shock resistance (destructive)	for 8 min each in X, Y, and Z directions 150 m/s <sup>2</sup> 3 times each in 6 directions (up/down, left/right, forward/backward)				
n method	Connector connection type (camera cable ZFX-VS/VSR required)				
	ZFX-SC				
	Case: Aluminum die-cast, Cover: Zinc-plated copper plate 0.5 mm thick, Camera mounting base:ABS				
	Approx. 80 g				
s	Instructio	on Sheet			
	etection ance (L) between ance and ange ure element urber of pixels function function fentire screen) t Lighting method LED Type Guide light Coptional lighting I/F Indicator Class*1 Power supply voltage (supplied from Controller) Current consumption Ambient temperature range Ambient atmosphere Degree of protection Dielectric strength Vibration resistance (durability) Shock resistance (destructive) method	ange (H × V)    Image (H × V)      etection    Image (H × V)      ance (L)    The CCTV lens is selected and the setting distance.      p between ance and ange    All-pixel capture inter-line transfer type 1/3° CCD (monochrome)      ure element    All-pixel capture (inter-line transfer type 1/3° CCD (monochrome)      urber of pixels    659(H) ×      function    Fine, Normal, High speed      functio			


\*1: Applicable standards IEC60825-1:1993 +A1:1997 +A2:2001, EN60825-1:1994 +A2:2001 +A1:2002


#### CCTV Lenses

#### Optical Graph

If using the ZFX-S/SC Camera (Camera only), refer to the optical graph below and select the lens and Extension Tubes. The lens to be selected will depend on the size of the measurement object and the camera distance.

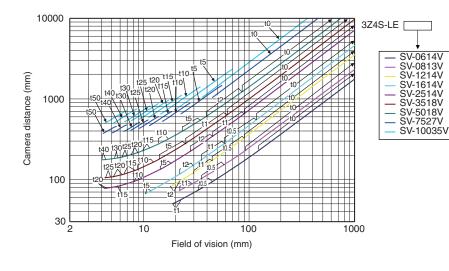





#### CCTV Lenses

Lens model	3Z4S-LE SV-0614V	3Z4S-LE SV-0813V	3Z4S-LE SV-1214V	3Z4S-LE SV-1614V	3Z4S-LE SV-2514V	3Z4S-LE SV-3518V	3Z4S-LE SV-5018V	3Z4S-LE SV-7527V	3Z4S-LE SV-10035V
Appearance	29 dia.	28 dia.	29 dia.	29 dia.	29 dia.	29 dia.	32 dia. 37.0	32 dia. 42.0	32 dia. 43.9
Focal length	6 mm	8 mm	12 mm	16 mm	25 mm	35 mm	50mm	75 mm	100 mm
Brightness	F1.4	F1.3	F1.4	F1.4	F1.4	F1.8	F1.8	F2.7	F3.5
Filter size	M27 P0.5	M25.5 P0.5	M27 P0.5	M27 P0.5	M27 P0.5	M27 P0.5	M30.5 P0.5	M30.5 P0.5	M30.5 P0.5

#### Extension Tubes

Model	3Z4S-LE SV-EXR
Contents	Set of seven tubes (0.5 mm, 1.0 mm, 2.0 mm, 5 mm, 10 mm, 20 mm, and 40 mm) Maximum outer diameter: 30 mm


\*Do not use the 0.5-mm, 1.0-mm, and 2.0-mm Extension

Tubes next to each other. These Extension Tubes are placed over the threaded section of the Lens or other Extension Tube. If more than one them are used together, the connection of the threaded section may not be secure.


\*Reinforcement is required to protect against vibration when Extension Tubes exceeding 30 mm are used.

#### External Dimensions(Unit:mm)


Tolerance class IT16 applies to dimensions in this datasheet unless otherwise specified.

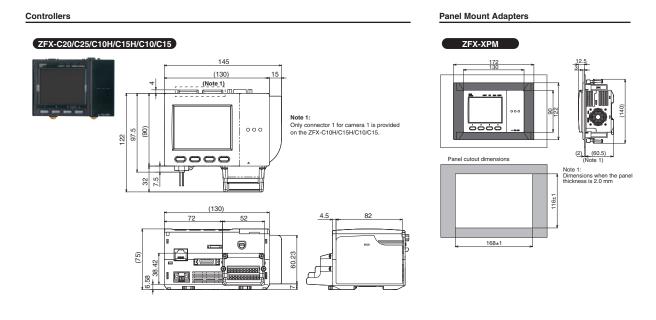


**Optional Lighting** 

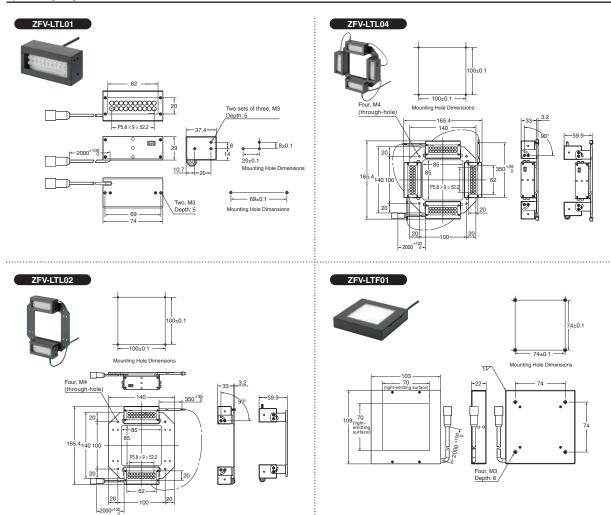



#### Cameras

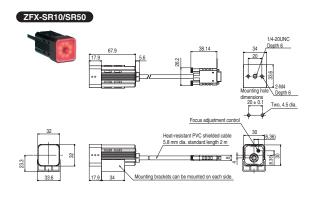


ZFX-SR10R/SR50R

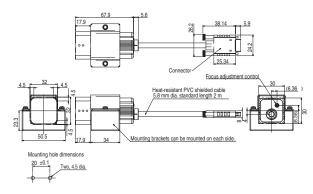

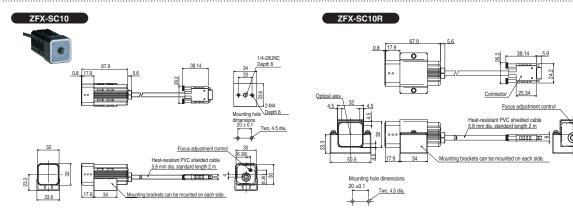


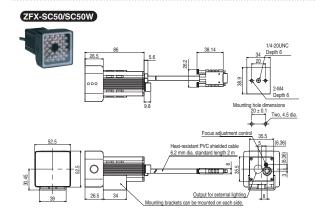


ZFX-SC50R

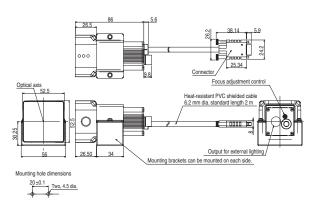




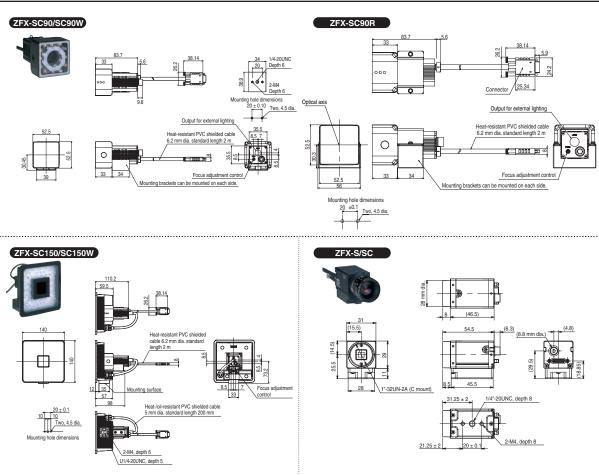

LCD Monitor

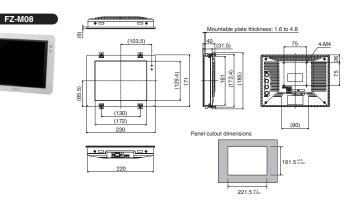



#### MEMO

-			 		 	 			 				 			 
-		 			 	 				 	 		 			
-			 	 	 	 			 				 			 
-					 				 				 			 
	-															
-													 			
-								 	 				 			 
-	-	 									 		 			
-									 				 			 
-		 									 		 			
-													 			 
-	-								 				 			 
	-															
	-												 			
	-										 		 			_

#### MEMO

															]	

#### READ AND UNDERSTAND THIS DOCUMENT

Please read and understand this document before using the products. Please consult your OMRON representative if you have any questions or comments.

#### WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

#### LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

#### SUITABILITY FOR USE

THE PRODUCTS CONTAINED IN THIS DOCUMENT ARE NOT SAFETY RATED. THEY ARE NOT DESIGNED OR RATED FOR ENSURING SAFETY OF PERSONS, AND SHOULD NOT BE RELIED UPON AS A SAFETY COMPONENT OR PROTECTIVE DEVICE FOR SUCH PURPOSES. Please refer to separate catalogs for OMRON's safety rated products.

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the product.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this document.
  Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles,
- safety equipment, and installations subject to separate industry or government regulations.
- · Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

#### PERFORMANCE DATA

Performance data given in this document is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

#### CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the product may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

#### DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

#### ERRORS AND OMISSIONS

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

#### **PROGRAMMABLE PRODUCTS**

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

#### COPYRIGHT AND COPY PERMISSION

This document shall not be copied for sales or promotions without permission.

This document is protected by copyright and is intended solely for use in conjunction with the product. Please notify us before copying or reproducing this document in any manner, for any other purpose. If copying or transmitting this document to another, please copy or transmit it in its entirety.

This document provides information mainly for selecting suitable models. Please read the User's Manual (Z251-E1-01) carefully for information that the user must understand and accept before purchase, including information on warranty, limitations of liability, and precautions.

OMRON Corporation Industrial Automation Company Tokyo, JAPAN

#### Contact: www.ia.omron.com

Regional Headquarters OMRON EUROPE B.V. Sensor Business Unit Carl-Benz-Str. 4, D-71154 Nufringen, Germany Tel: (49) 7032-811-0/Fax: (49) 7032-811-199

OMRON ASIA PACIFIC PTE. LTD. No. 438A Alexandra Road # 05-05/08 (Lobby 2), Alexandra Technopark, Singapore 119967 Tel: (65) 6835-3011/Fax: (65) 6835-2711 OMRON ELECTRONICS LLC One Commerce Drive Schaumburg, IL 60173-5302 U.S.A. Tel: (1) 847-843-7900/Fax: (1) 847-843-7787

OMRON (CHINA) CO., LTD. Room 2211, Bank of China Tower, 200 Yin Cheng Zhong Road, PuDong New Area, Shanghai, 200120, China Tel: (86) 21-5037-2222/Fax: (86) 21-5037-2200 Authorized Distributor:

© OMRON Corporation 2009 All Rights Reserved. In the interest of product improvement, specifications are subject to change without notice. CSM\_2\_4\_1112 Cat. No. E381-E1 Printed in Japan



Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию.

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России, а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научноисследовательскими институтами России.

С нами вы становитесь еще успешнее!

#### Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург, Промышленная ул, дом № 19, литера Н, помещение 100-Н Офис 331