

LL01CR-BRxxL-Mx Data Sheet

For CREE Multi-Color and Single-Color LEDs



Features:

- High efficiency
- Available in 6 beam Patterns
- Optimized for uniform effects
- Lens with Housing

Typical applications :

- Stage Lighting
- Street Lights
- Decorative Light
- Architectural Lighting
- Down Light

Table of Contents

General Information.....	2
General Specifications.....	2
Optical Specifications.....	3
Mechanical Specifications.....	4
Illumination charts.....	5
Package Specifications.....	6
Product Nomenclature.....	7

General Information

- **Compatible Led Type :**

The LL01CR-BRxxL-Mx single lens are optimized for both Multi-Color R.G.B CREE LEDs and Single-Color Cree LEDs (Cree XR-E White) from Cree Opto.⁽¹⁾

- **Beam Angle Type :**

An optimized profile integrate different front shape enable the generation of six different lens models: smallest beam(30deg);medium beam (40deg);biggest beam (50deg);oval beam (10*45deg) ,(15*50deg)and (15*80deg).⁽²⁾

- **The Way to Assembly :**

The Lens should be assembled to the PCB board or MCPCB upon LEDs which provides the most appropriate related position, so as to achieve the best uniform results

*** Manually installation or if necessary thermal glue are recommended.**

- **Function :**

LL01CR-BRxxL-Mx provides exceptional color mixing result with the highest efficiency through careful engineering and precision manufacturing process.

General Specifications

- | | |
|-------------------------------|------------------------------------|
| • Lens Material | Optical Grade PMMA PC |
| • Operating Temperature range | -40°C ~ + 70°C (upper limit +80°C) |
| • Storage Temperature range | -40°C ~ + 70°C (upper limit +80°C) |

*Average transmittance in visible spectrum 400nm~700nm> 90%

Notes:

(1) Cree XR-E is a trademark of Cree,Inc , for technical information on LEDs, please refer to Cree,Inc, www.cree.com/xlamp.

(2) Typical beam divergence will be affected by different color of LEDs.

Optical Specifications [Typical beam Angle and intensity (cd/lm) of LL01 lens]

• CREE XR-E LED

Typical Cone Angle (degree) ⁽³⁾ with CREE XR-E			
Part Number	Red LEDs	Green LEDs	Blue LEDs
LL01CR-BR30L-M2	30	25	26
LL01CR-BR40L-M2	34	32	33
LL01CR-BR50L-M2	41	42	41
LL01CR-BR1045L-M2	22*47	23*48	25*49
LL01CR-BR1550L-M2	29*61	24*56	24*57
LL01CR-BR1580L-M2	28*74	25*75	30*77

The typical cone angle measures where the luminous intensity is 90% of the peak value of intensity. This typical cone varies with LED color due to different chip size and chip position tolerance.

Typical on axis intensity (cd/w) ⁽⁴⁾ with CREE XR-E			
Part Number	Red LEDs	Green LEDs	Blue LEDs
LL01CR-BR30L-M2	200	760	120
LL01CR-BR40L-M2	155	470	80
LL01CR-BR50L-M2	110	300	55
LL01CR-BR1045L-M2	100	350	65
LL01CR-BR1550L-M2	85	330	60
LL01CR-BR1580L-M2	80	350	30

Luminous intensity depends on the flux binning and tolerance of the LEDs. Please refer to the LEDs data sheet for more details on Flux binning and mechanical tolerance.

• CREE XR-E LED

Typical Cone Angle (degree) ⁽³⁾ with CREE XR-E			
Part Number	White LEDs	Warm white LEDs	
LL01CR-BR30L-M2	24	25	
LL01CR-BR40L-M2	29	31	
LL01CR-BR50L-M2	38	42	
LL01CR-BR1045L-M2	26*47	18*44	
LL01CR-BR1550L-M2	21*55	25*60	
LL01CR-BR1580L-M2	24*74	22*73	

The typical cone angle the full angle measured where the luminous intensity is 90% of the peak value of intensity. That typical cone varies with LED color due to different chip size and chip position tolerance.

Typical on axis intensity (cd/w) ⁽⁴⁾ with CREE XR-E			
Part Number	White LEDs	Warm white LEDs	
LL01CR-BR30L-M2	700	600	
LL01CR-BR40L-M2	430	400	
LL01CR-BR50L-M2	280	190	
LL01CR-BR1045L-M2	245	340	
LL01CR-BR1550L-M2	370	270	
LL01CR-BR1580L-M2	360	202	

Luminous intensity depends on the flux binning and tolerance of the LEDs. Please refer to the LEDs data sheet for more detail on Flux binning and mechanical tolerance

Notes:

(3) The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.

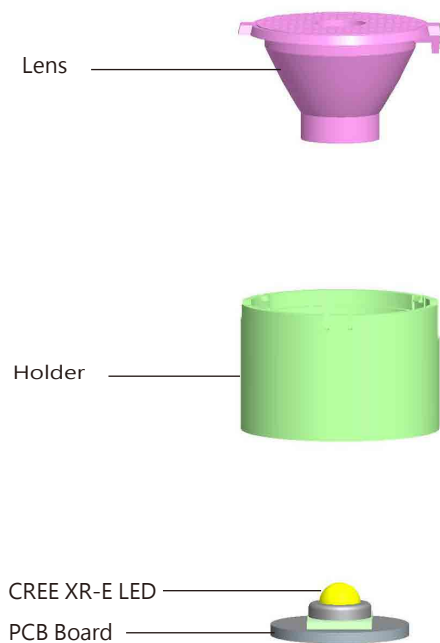
(4) The efficiency value listed above is the total value of the whole lens model, the value depends on the total flux of the LED used. Luminous intensity depends on the LEDs flux and its tolerances, for more details of LED flux, please check Cree data sheet at www.cree.com.

Mechanical Specifications


• Usage and Maintenance :

1. If necessary, clean lenses with mild soap, water and soft cloth
2. Never use any commercial cleaning solvents on lenses, like alcohol
3. Please handle or install lenses with wearing gloves, skin oils may damage lens or its optical characteristic.


1. Lens + Leds+MCPCB assembly instruction




2. View assembly lens with MCPCB:



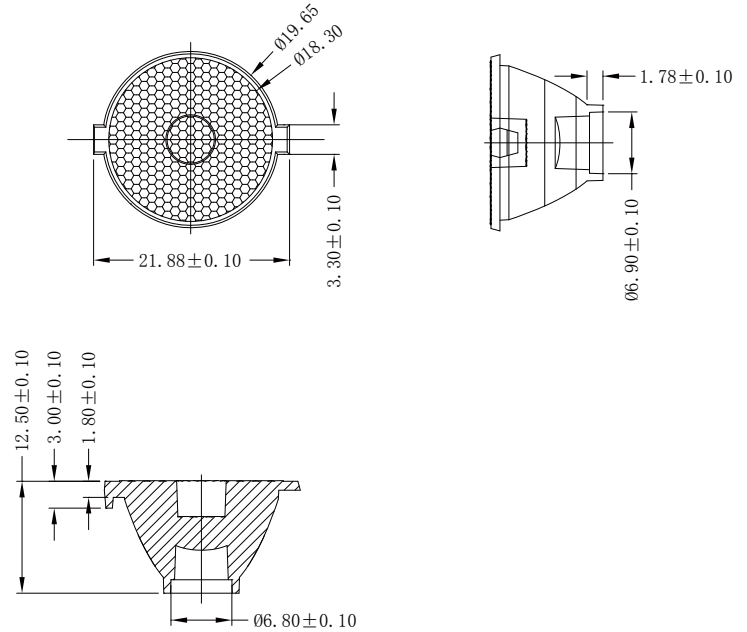3. Lens dimensions and Top Views:



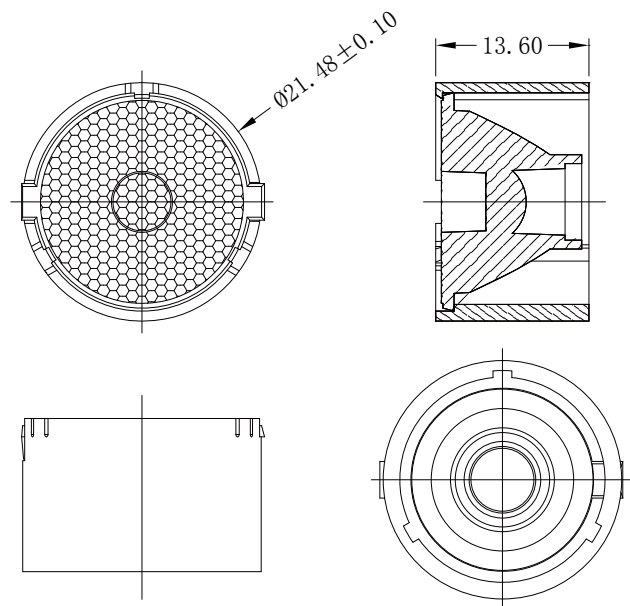4. Lens assembly Dimensions and Top Views :







Notes:

- (1) All dimensions are in mm.
- (2) Drawing not to scale.
- (3) Collimator material is PMMA.

Illumination charts

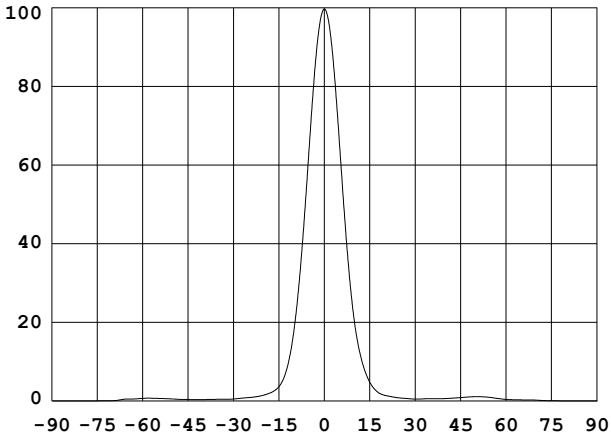
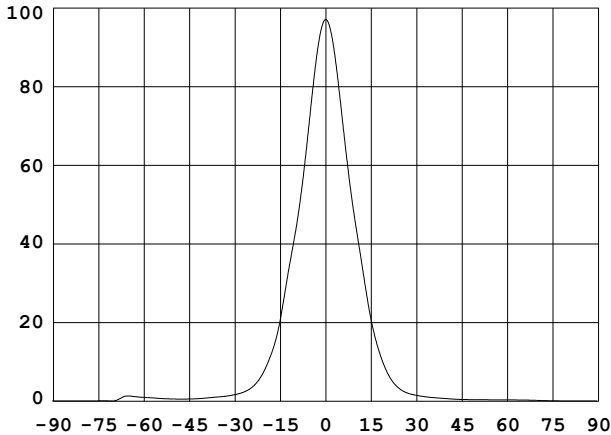
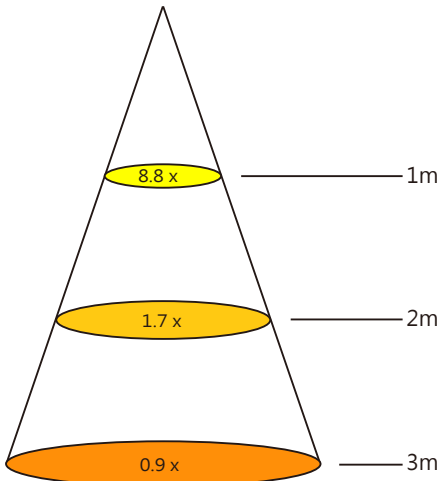
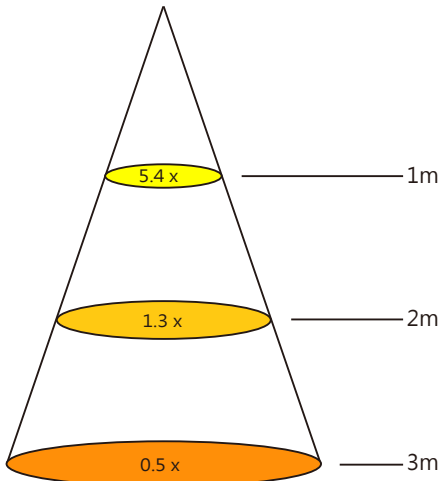
*CREE single white LED: CREE XR-E

LL01CR-BR30L-M2	LL01CR-BR40L-M2
1. Beam Pattern	1. Beam Pattern
	
2. Light Distribution Curve	2. Light Distribution Curve
	
3. Illuminance	3. Illuminance
	

Notes: The Flux of CREE XR-E LED is 85 lm

Package


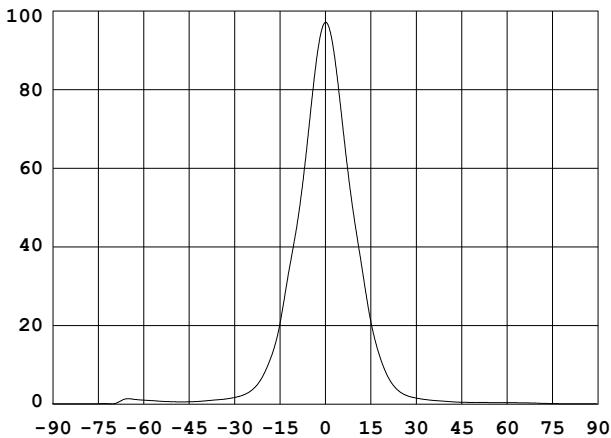
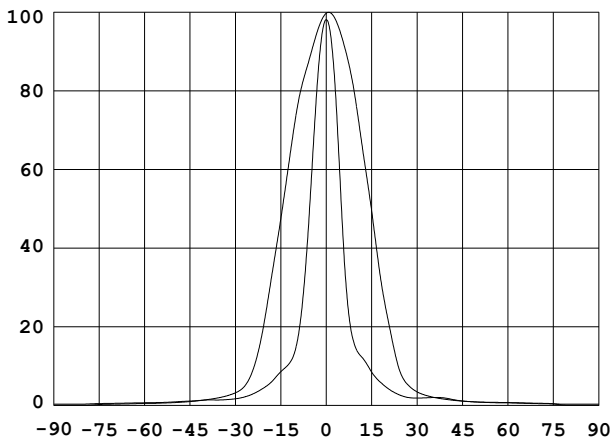
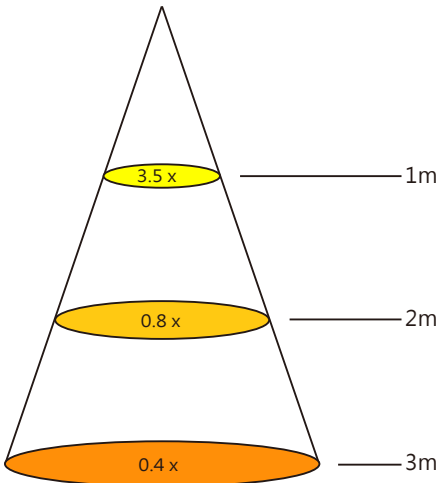
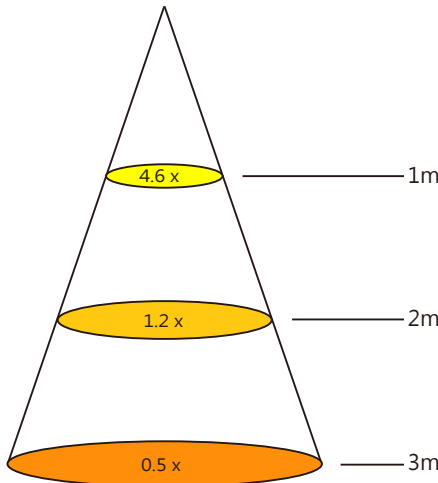
*CREE single white LED: CREE XR-E

LL01CR-BR50L-M2	LL01CR-BR1045L-M2
1. Beam Pattern	1. Beam Pattern
	
2. Light Distribution Curve	2. Light Distribution Curve
	
3. Illuminance	3. Illuminance
	

Notes: The Flux of CREE XR-E LED is 85 lm


Product Nomenclature

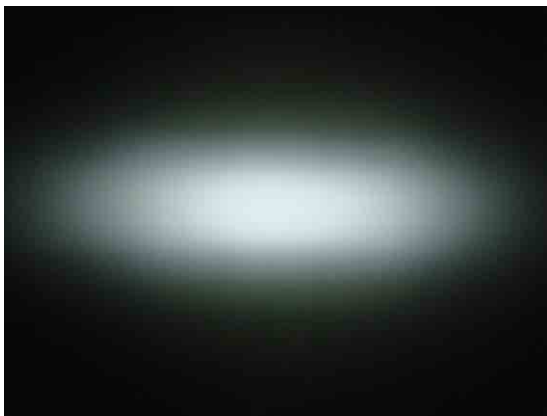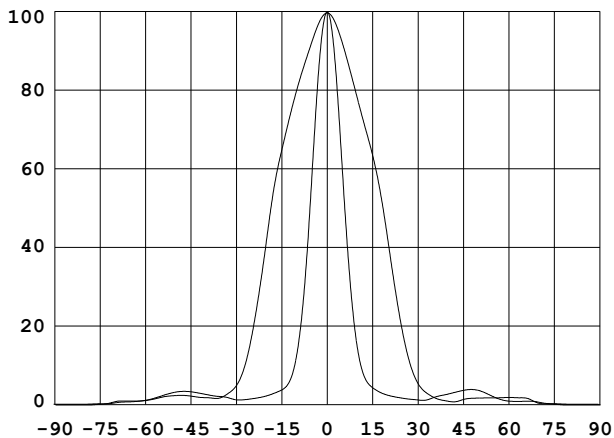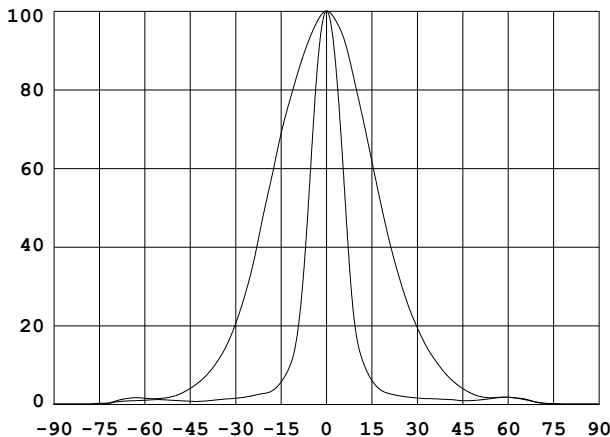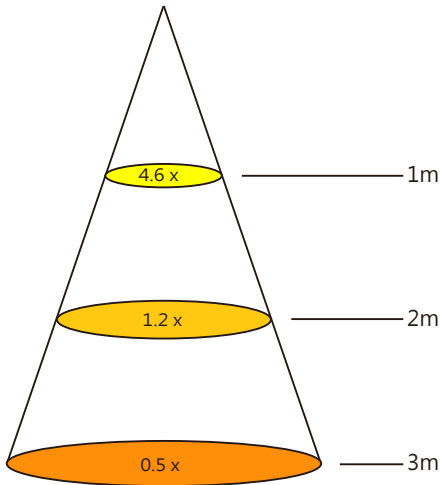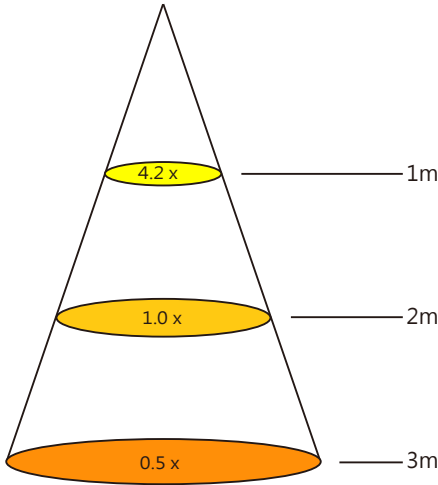*CREE single white LED: CREE XR-E



LL01CR-BR1550L-M2	LL01CR-BR1580L-M2
1. Beam Pattern	1. Beam Pattern
	
2. Light Distribution Curve	2. Light Distribution Curve
	
3. Illuminance	3. Illuminance
	

Notes: The Flux of CREE XR-E LED is 85 lm


Item	Quantity	Total	Size (long*width* high)
Inner box	100	100pcs	34*30*3.5 cm
Outer box	10tray/box	1000pcs	35*31*21 cm
Outer box	2 inner box/outer box	2000pcs	64.7*36.5*24 cm

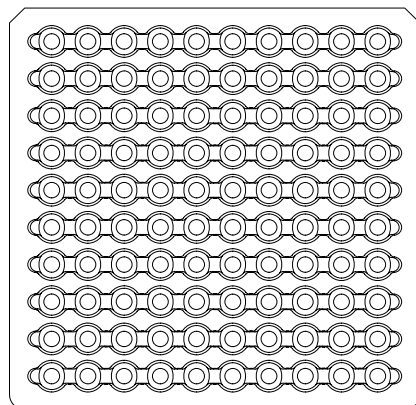


100pcs/tray

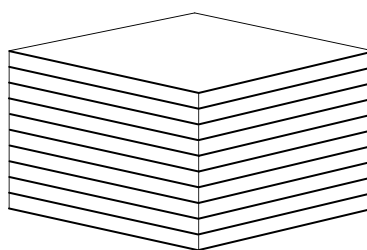

1000pcs/inner box

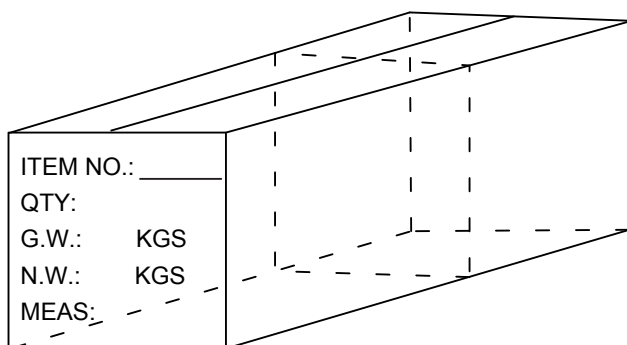

2000pcs/outer box

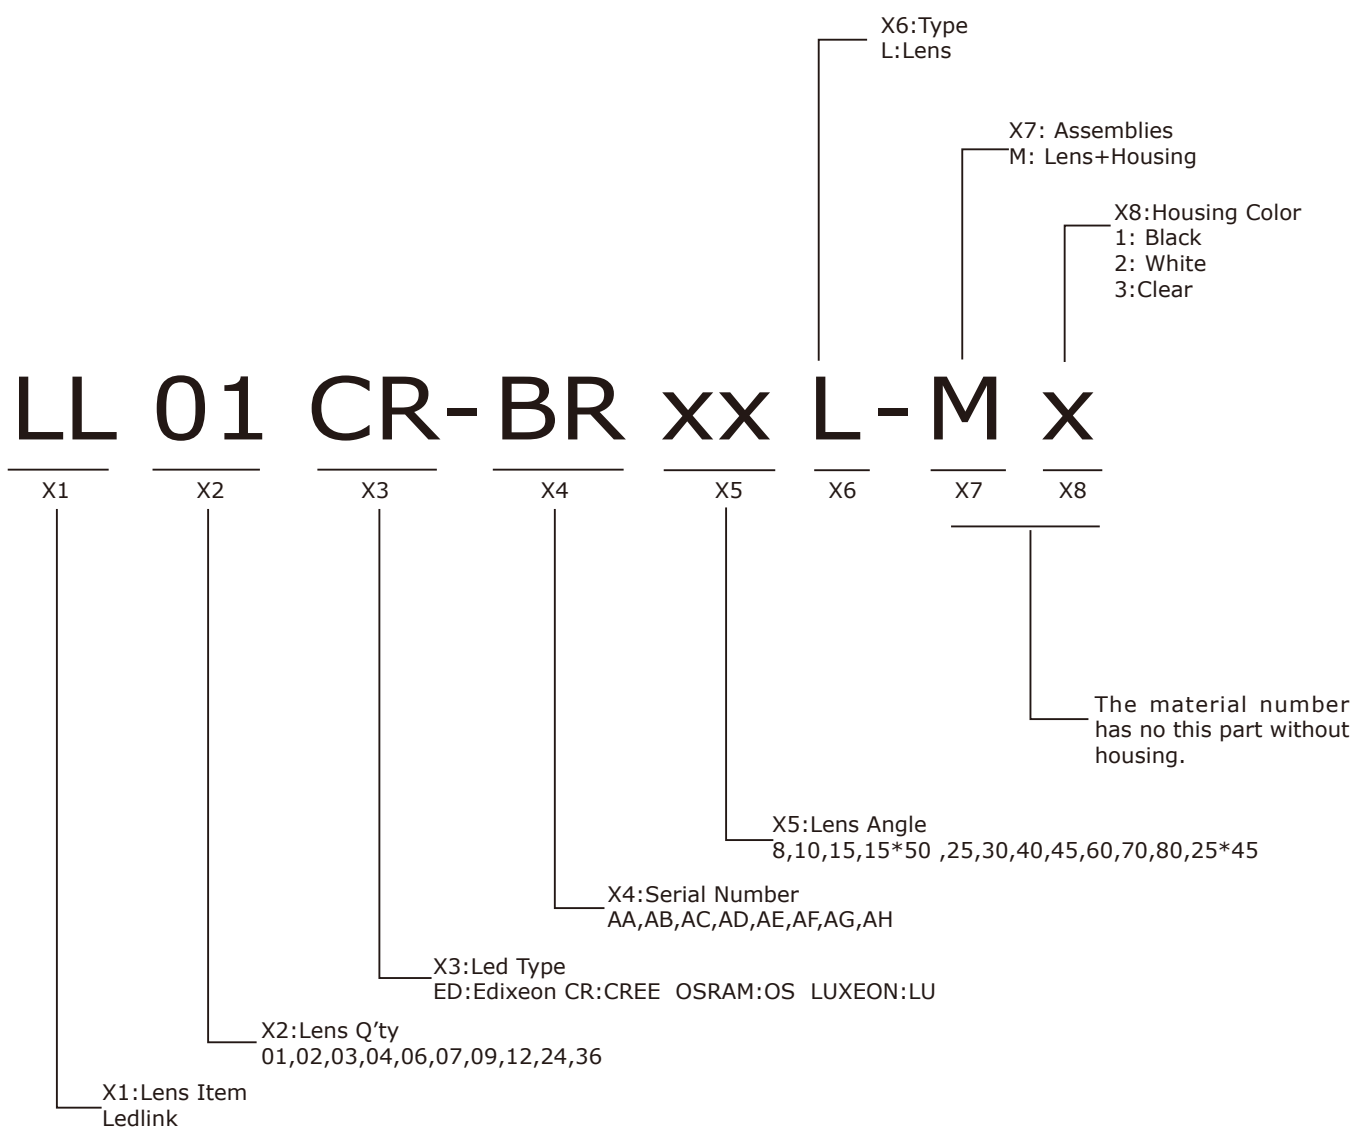



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331