

PNP POWER SILICON TRANSISTOR

Qualified per MIL-PRF-19500/545

DEVICES

2N5151	2N5153
2N5151L	2N5153L
2N5151U3	2N5153U3

LEVELS

JAN
JANTX
JANTXV
JANS

ABSOLUTE MAXIMUM RATINGS ($T_C = +25^\circ\text{C}$ unless otherwise noted)


Parameters / Test Conditions	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	80	Vdc
Collector-Base Voltage	V_{CBO}	100	Vdc
Emitter-Base Voltage	V_{EBO}	5.5	Vdc
Collector Current	I_C	2.0	Adc
Total Power Dissipation 2N5151, 2N5153, L @ $T_A = +25^\circ\text{C}$ ⁽¹⁾ 2N5151, 2N5153, L @ $T_C = +25^\circ\text{C}$ ⁽²⁾ 2N5151U3, 2N5153U3 @ $T_A = +25^\circ\text{C}$ ⁽³⁾ 2N5151U3, 2N5153U3 @ $T_C = +25^\circ\text{C}$ ⁽⁴⁾	P_T	1.0 10 1.16 100	W
Operating & Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200	$^\circ\text{C}$
Thermal Resistance, Junction-to Case	$R_{\theta JC}$	10 1.75 (U3)	$^\circ\text{C}/\text{W}$

Note:


- 1) Derate linearly 5.7mW/ $^\circ\text{C}$ for $T_A > +25^\circ$
- 2) Derate linearly 66.7mW/ $^\circ\text{C}$ for $T_A > +25^\circ$
- 3) Derate linearly 6.63mW/ $^\circ\text{C}$ for $T_A > +25^\circ$
- 4) Derate linearly 571mW/ $^\circ\text{C}$ for $T_A > +25^\circ$

ELECTRICAL CHARACTERISTICS ($T_A = +25^\circ\text{C}$, unless otherwise noted)


Parameters / Test Conditions	Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS				
Collector-Emitter Breakdown Voltage $I_C = 100\text{mAdc}, I_B = 0$	$V_{(BR)CEO}$	80		Vdc
Emitter-Base Cutoff Current $V_{EB} = 4.0\text{Vdc}, I_C = 0$ $V_{EB} = 5.5\text{Vdc}, I_C = 0$	I_{EBO}		1.0 1.0	μAdc mAdc
Collector-Emitter Cutoff Current $V_{CE} = 60\text{Vdc}, V_{BE} = 0$ $V_{CE} = 100\text{Vdc}, V_{BE} = 0$	I_{CES}		1.0 1.0	μAdc mAdc
Collector-Base Cutoff Current $V_{CE} = 40\text{Vdc}, I_B = 0$	I_{CEO}		50	μAdc



TO-5
2N5151L, 2N5153L
 (See Figure 1)



TO-39 (TO-205AD)
2N5151, 2N5153



U-3
2N5151U3, 2N5153U3

PNP POWER SILICON TRANSISTOR

Qualified per MIL-PRF-19500/545

ELECTRICAL CHARACTERISTICS

Parameters / Test Conditions	Symbol	Min.	Max.	Unit
ON CHARACTERISTICS				
Forward-Current Transfer Ratio $I_C = 50\text{mA dc}, V_{CE} = 5\text{V dc}$		20		
2N5151		50		
2N5153				
$I_C = 2.5\text{A dc}, V_{CE} = 5\text{V dc}$	h_{FE}	30	90	
2N5151		70	200	
2N5153				
$I_C = 5\text{A dc}, V_{CE} = 5\text{V dc}$		20		
2N5151		40		
2N5153				
Collector-Emitter Saturation Voltage $I_C = 2.5\text{A dc}, I_B = 250\text{mA dc}$ $I_C = 5.0\text{A dc}, I_B = 500\text{mA dc}$	$V_{CE(sat)}$		0.75 1.5	Vdc
Base-Emitter Voltage Non-Saturation $I_C = 2.5\text{A dc}, V_{CE} = 5\text{V dc}$	V_{BE}		1.45	Vdc
Base-Emitter Saturation Voltage $I_C = 2.5\text{A dc}, I_B = 250\text{mA dc}$ $I_C = 5.0\text{A dc}, I_B = 500\text{mA dc}$	$V_{BE(sat)}$		1.45 2.2	Vdc

DYNAMIC CHARACTERISTICS

Magnitude of Common Emitter Small-Signal Short-Circuit Forward Current Transfer Ratio $I_C = 500\text{mA dc}, V_{CE} = 5\text{V dc}, f = 10\text{MHz}$		6		
2N5151	$ h_{fe} $	7		
2N5153				
Common-Emitter Small-Signal Short-Circuit. Forward-Current Transfer Ratio $I_C = 100\text{mA dc}, V_{CE} = 5\text{V dc}, f = 1\text{kHz}$	h_{fe}	20		
2N5151		50		
2N5153				
Output Capacitance $V_{CB} = 10\text{V dc}, I_E = 0, f = 1.0\text{MHz}$	C_{obo}		250	pF

SWITCHING CHARACTERISTICS

Parameters / Test Conditions	Symbol	Min.	Max.	Unit
Turn-On Time $I_C = 5\text{A dc}, I_{B1} = 500\text{mA dc}$ $I_{B2} = -500\text{mA dc}$ $R_L = 6\Omega$ $V_{BE(OFF)} = 3.7\text{V dc}$	t_{on}		0.5	μs
Turn-Off Time $I_C = 5\text{A dc}, I_{B1} = 500\text{mA dc}$ $I_{B2} = -500\text{mA dc}$ $R_L = 6\Omega$ $V_{BE(OFF)} = 3.7\text{V dc}$	t_{off}		1.5	μs

6 Lake Street, Lawrence, MA 01841
 1-800-446-1158 / (978) 620-2600 / Fax: (978) 689-0803
 Website: <http://www.microsemi.com>

PNP POWER SILICON TRANSISTOR

Qualified per MIL-PRF-19500/545

SWITCHING CHARACTERISTICS (cont.)

Parameters / Test Conditions		Symbol	Min.	Max.	Unit
Storage Time	$I_C = 5\text{Adc}$, $I_{B1} = 500\text{mAdc}$	t_s		1.4	μs
	$I_{B2} = -500\text{mAdc}$				
Fall Time	$R_L = 6\Omega$ $V_{BE(\text{OFF})} = 3.7\text{Vdc}$	t_f		0.5	μs

SAFE OPERATING AREA

DC Tests

$T_C = +25^\circ\text{C}$, 1 Cycle, $t_p = 1.0\text{s}$

Test 1

$V_{CE} = 5.0\text{Vdc}$, $I_C = 2.0\text{Adc}$


Test 2

$V_{CE} = 32\text{Vdc}$, $I_C = 310\text{mAdc}$

Test 3

$V_{CE} = 80\text{Vdc}$, $I_C = 14.5\text{mAdc}$

FIGURE 1 (TO-5, TO-39)
 PACKAGE DIMENSIONS

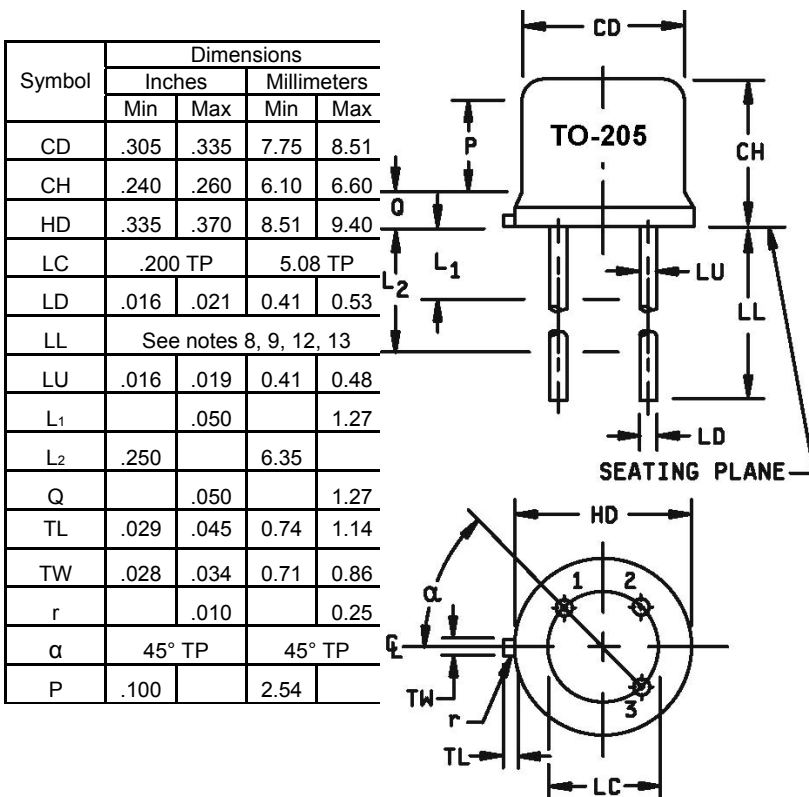

6 Lake Street, Lawrence, MA 01841
 1-800-446-1158 / (978) 620-2600 / Fax: (978) 689-0803
 Website: <http://www.microsemi.com>

PNP POWER SILICON TRANSISTOR


Qualified per MIL-PRF-19500/545

NOTES:

- 1 Dimensions are in inches.
- 2 Millimeters are given for general information only.
- 3 Beyond r (radius) maximum, TW shall be held for a minimum length of .011 inch (0.28 mm).
- 4 TL measured from maximum HD.
- 5 Outline in this zone is not controlled.
- 6 CD shall not vary more than .010 inch (0.25 mm) in zone P. This zone is controlled for automatic handling.
- 7 Leads at gauge plane .054 +.001 -.000 inch (1.37 +0.03 -0.00 mm) below seating plane shall be within .007 inch (0.18 mm) radius of true position (TP) at maximum material condition (MMC) relative to tab at MMC.
- 8 LU applied between L1 and L2. LD applies between L2 and LL minimum. Diameter is uncontrolled in L1 and beyond LL minimum.
- 9 All three leads.
- 10 The collector shall be electrically and mechanically connected to the case.
- 11 r (radius) applies to both inside corners of tab.
- 12 In accordance with ASME Y14.5M, diameters are equivalent to ϕx symbology.
- 13 For transistor types 2N5151 and 2N5153, LL is .5 inch (13 mm) minimum, and .75 inch (19 mm) maximum.
- 14 For transistor types 2N5151L and 2N5153L, LL is 1.5 inch (38 mm) minimum and 1.75 inch (44.4 mm) maximum.
- 15 Lead designation, depending on device type, shall be as follows: lead numbering; lead 1 = emitter, lead 2 = base, and lead 3 = collector.

**FIGURE 2 (U3)
PACKAGE DIMMENSIONS**

Symbol	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
BL	.395	.405	10.04	10.28
BW	.291	.301	7.40	7.64
CH	.1085	.1205	2.76	3.06
LH	.010	.020	0.25	0.51
LL1	.220	.230	5.59	5.84
LL2	.115	.125	2.93	3.17
LS1	.150 BSC		3.81 BSC	
LS2	.075 BSC		1.91 BSC	
LW1	.281	.291	7.14	7.39
LW2	.090	.100	2.29	2.54
Q1	.030		0.762	
Q2	.030		0.762	

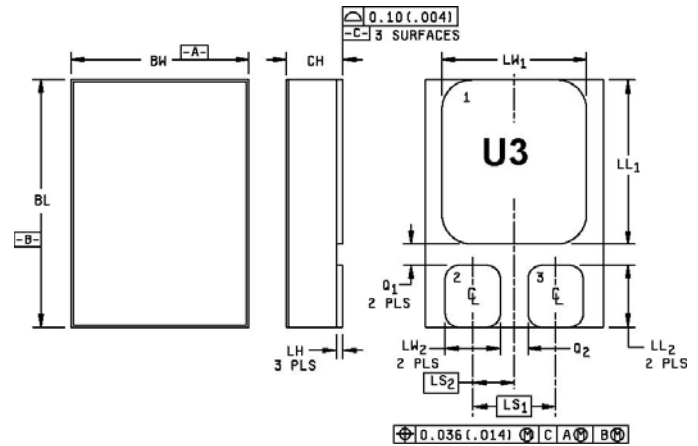

NOTES:

- 1 Dimensions are in inches.
- 2 Millimeters are given for general information only.
- 3 Terminal 1 - collector, terminal 2 - base, terminal 3 - emitter



Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331