
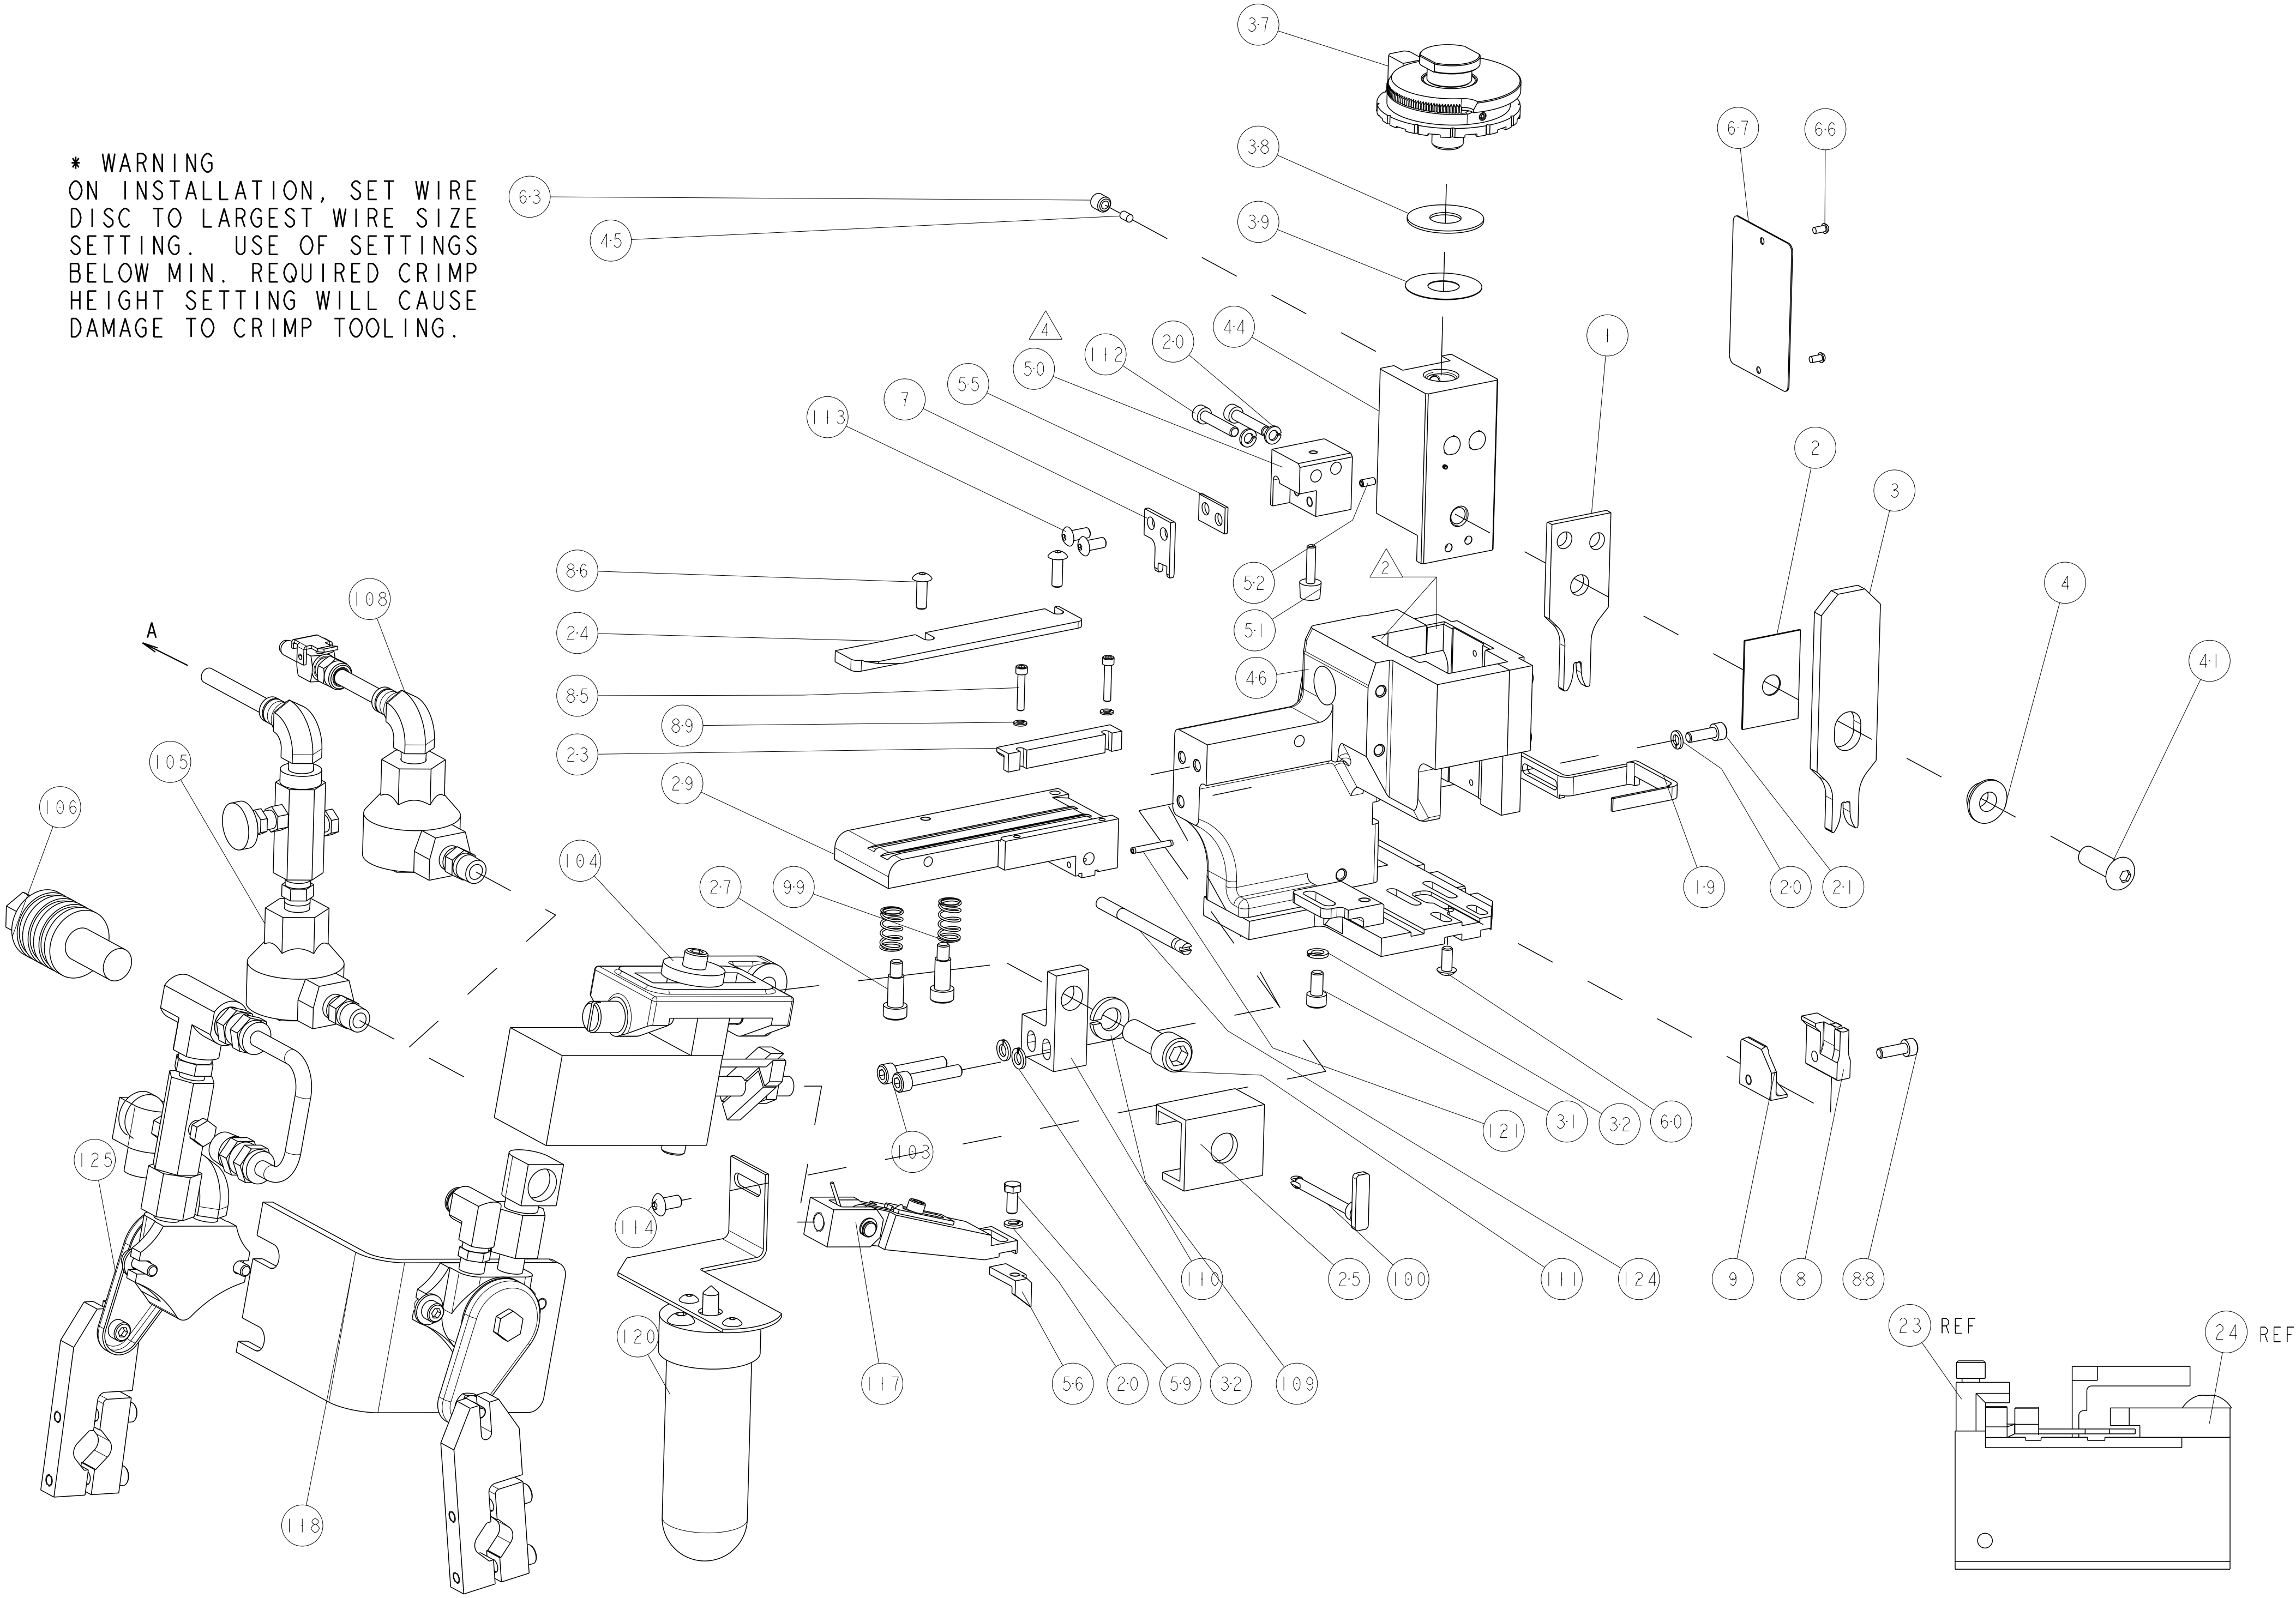


8			7					
THIS DRAWING IS UNPUBLISHED.			RELEASED FOR PUBLICATION			20		
(C) COPYRIGHT 20			BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.					
PART NUMBER	REV	FIRST USED	POWER UNIT		FEED TYPE		DESCRIPTION	
1855451-1	C	122500-1	LEADMAKER		AIR FEED		CUTS CARRIER	
1855451-2	C	565435-5	BENCH MODEL K		AIR FEED		CUTS CARRIER	
1855451-3	C	354500-1	BENCH MODEL G		AIR FEED		CUTS CARRIER	
7-1855451-7	A	-	-		-		SPARE PARTS	

- △ RECOMMENDED SPARE PARTS
△ GREASE LIGHTLY
△ GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE
△ GRIND AT ASSEMBLY.
5. TERMINAL LUBRICANT IS RECOMMENDED.
△ INSTALL ITEMS 101,102 & 119 ON SIDE OF STRIPPER ON APPLICATOR HOUSING USING ITEM 21.

*** WARNING**
ON INSTALLATION, SET WIRE DISC TO LARGEST WIRE SIZE SETTING. USE OF SETTINGS BELOW MIN. REQUIRED CRIMP HEIGHT SETTING WILL CAUSE DAMAGE TO CRIMP TOOLING.



TERMINAL NAME: RING TONGUE						
TE PN	DELPHI	DELPHI TERMINAL - TE CRIMP SPECS				
1949828-2	2984576					REF SETTING
1949828-3	2973375					
-	-	CRIMP HEIGHT		WIRE SIZE		
-	-	2.67mm+.05/- .05 [.105+.002/- .002]		14AWG or 2mm2		
-	-	2.53mm+.05/- .05 [.100+.002/- .002]		1.5mm2		
-	-	2.47mm+.05/- .05 [.097+.002/- .002]		16AWG or 1.25mm2		
-	-	2.41mm+.05/- .05 [.095+.002/- .002]		1mm2		
-	-	CRIMP	SIZE	TYPE	RANGE	
-	-					
-	-					
-	-					
-	-	WIRE	3.30mm [.130]	F	1mm2-2mm2	
-	-	INSUL	4.20mm [.165]	F	Ø 3.050 MAX	
WIRE STRIP LENGTH 4.47-4.85	TERM APPL SPEC NONE	FEED 13.89	APPLICATOR INSTRUCTIONS 408-8040		SET UP GAGE 458637-1	-

LOC		DIST		REVISIONS							
A		66									
				P	LTR	DESCRIPTION		DATE		DWN	APVD
					A	RELEASED		30JAN2009		BH	BH
					B	ECR-09-007141		30MAR2009		MY	GB
					C	ECR-10-009696		12MAY2010		MY	TE

△	-	-	1	-	-	455350-4	AIR BLAST ASS'Y	125
-	1	1	1	-	-	690432-6	ADJUSTMENT SCREW	124
-	1	1	1	-	-	4-21028-0	PIN, SLOTTED SPRING .094 X .750	121
-	-	1	-	...	-	1-465184-0	LUBRICATOR ASSY	120
△	-	18	24	18	IN	27319-4	TUBING 1/4" O.D.	119
-	-	1	-	...	-	692655-6	AIR FEED VALVE ASSEMBLY	118
-	1	1	1	-	-	461062-1	FEED FINGER ASSEMBLY	117
△	-	-	REF	-	...	455749-1	GUARD WINDOW	116
△	-	REF	-	-	...	679532-1	INSERT, GUARD	115
-	-	1	-	-	-	2-21002-6	SCR, BTN SKT HD CAP 10-32 X .375	114
-	2	2	2	-	-	2-21002-1	SCR, BTN SKT HD CAP 8-32 X .375	113
△	-	2	2	2	-	3-21000-0	SCR, SKT HD CAP 8-32 X .875	112
-	1	1	1	-	-	3-21001-5	SCR, SKT HD CAP 3/8-16 X 1.000	111
-	1	1	1	-	-	459610-1	MOUNT, FEED BRACKET	110
-	1	1	1	-	-	21024-8	WASHER, SPRG LOCK, REG 3/8	109
-	1	-	1	-	-	692655-7	AIR FEED VALVE ASSEMBLY	108
-	-	1	-	-	-	24042-2	VALVE, SLEEVE, 3-WAY	106
-	-	1	-	-	-	692655-5	AIR FEED VALVE ASSEMBLY	105
-	1	1	1	-	-	461065-1	ASSEMBLY, AIR FEED	104
-	2	2	2	-	-	3-21000-9	SCR, SKT HD CAP 10-32 X 1.000	103
△	-	1	1	1	-	986220-3	CLAMP, CABLE, BLACK	102
△	-	1	1	1	-	23238-1	INSERT, COUPLING	101
-	1	1	1	-	-	690546-1	LEVER, DRAG RELEASE	100
-	2	2	2	-	-	1-22282-3	SPRING, COMPRESSION	99
-	2	2	2	-	-	21024-2	WASHER, SPRG LOCK, REG NO 4	89
-	1	1	1	-	-	2-21000-7	SCR, SKT HD CAP 8-32 X .500	88
-	2	2	2	-	-	2-21002-2	SCR, BTN SKT HD CAP 8-32 X .500	86
-	2	2	2	-	-	1-21000-6	SCR, SKT HD CAP 4-40 X .625	85
-	1	1	1	-	-	4088040	SF APPL INST 408-8040	72
-	1	1	1	-	-	217238-1	GENERAL INSTRUCTION PKG	71
-	1	1	1	-	-	461264-5	PLATE, IDENTIFICATION	67
-	2	2	2	-	-	21017-2	SCREW, DRIVE	66
-	1	1	1	-	-	21009-2	SCR, SET, SELF LOCKING 1/4-20 X .250	63
-	1	1	1	-	-	22733-8	SCR, BHSC, SELF-LOCKING, 8-32 X .375	60
-	1	1	1	-	-	2-22603-1	SCREW, MACH, HEX HD, 8-32 x .375	59
-	1	1	1	-	-	1-694433-5	FEED PAWL	56
-	1	1	1	-	-	5-240641-4	SPACER	55
-	1	1	1	-	-	2-21008-1	SCR, SET, SELF LOCKING 1/4-20 X .250	52
-	1	1	1	-	-	811242-7	BUMPER, HOLD DOWN	51
-	1	1	1	-	-	1633513-1	HOLDER, SLUG BLADE	50
-	1	1	1	-	-	1633399-1	APPL., BASIC AIR FEED SUB ASSY	46
-	1	1	1	-	-	690191-1	PLUG,NYLON	45
-	1	1	1	-	-	1-455673-4	RAM, SIDE FEED	44
-	1	1	1	-	-	7-21002-9	SCR, BTN SKT HD CAP 5/16-24 X 1.00	41
-	1	1	1	-	-	690125-1	SHIM SUB-ASSY	39
-	1	1	1	-	-	469367-7	SHIM	38
-	1	1	1	-	-	879103-3	FINE ADJUST HEAD ASSEMBLY	37
-	3	3	3	-	-	21024-5	WASHER, SPRG LOCK, REG NO 10	32
-	1	1	1	-	-	3-21000-4	SCR, SKT HD CAP 10-32 X .375	31
-	1	1	1	-	-	3-455671-3	PLATE,STRIP GUIDE	29
-	2	2	2	-	-	27210-3	SCR, SHLD, HEX HD,1/4 DIA	27
-	1	1	1	-	-	6-690754-0	DRAG, SPECIAL	25
-	1	1	1	-	-	8-690440-5	GUIDE, REAR STRIP	24
-	1	1	1	-	-	2-690712-6	FRONT STRIP GUIDE	23
-	1	1	1	-	-	2-21000-7	SCR, SKT HD CAP 8-32 X .500	21
-	4	4	4	-	-	21024-4	WASHER, SPRG LOCK, REG NO 8	20
△	-	1	1	1	-	1-456468-1	STRIPPER, SPECIAL	19
△	-	1	1	1	-	1633742-2	PLATE, REAR SHEAR	9
△	-	1	1	1	-	1633758-1	ANVIL, SPECIAL, COMBINATION	8
△	-	1	1	1	-	1-1583859-4	BLADE, SLUG	7
-	-	-	-	-	...	-	-	6
-	-	-	-	-	...	-	-	5
-	1	1	1	-	-	238009-5	BLOCK, FL CRIMPER SPACER	4
△	1	1	1	1	-	1633471-9	CRIMPER, INSULATION F	3
-	1	1	1	-	-	455888-5	SPACER, CRIMPER	2
△	1	1	1	1	-	8-1633305-9	CRIMPER, WIRE PREMIUM	1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION. IT IS UNPUBLISHED AND NOT TO BE RELEASED OR REPRODUCED WITHOUT THE WRITTEN PERMISSION OF TYCO ELECTRONICS CORPORATION. FOR THE LATEST REVISION, CONSULT THE REVISION HISTORY.		DWN B. HIGMAN	14DEC2008	Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		CHK T. ELBIN	14DEC2008	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.001 4 PLC ±.0001 ANGLES ±.01		APVD N. DEMING	14DEC2008	PRODUCT SPEC	
APPLICATION SPEC		APPLICATION SPEC		SIZE	
MATERIAL		WEIGHT		CAGE CODE	
-		-		00779	
CUSTOMER ACCESSIBLE PRODUCTION DRAWING		SCALE		SHEET	
		3:5		1 OF 1	
				REV	
				C	



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331