

SERIES: VSK-S10 | **DESCRIPTION:** AC-DC POWER SUPPLY


FEATURES

- up to 10 W continuous power
- compact board mount design
- universal input (85~264 Vac / 120~370 Vdc)
- single output from 3.3~24 V
- over current and short circuit protections
- UL/cUL safety approvals
- efficiency up to 80%



MODEL	output voltage (Vdc)	output current max (A)	output power max (W)	ripple and noise¹ typ (mVp-p)	efficiency typ (%)
VSK-S10-3R3UA	3.3	2	6.6	50	70
VSK-S10-5UA	5	2	10	50	74
VSK-S10-9UA	9	1.1	10	50	76
VSK-S10-12UA	12	0.9	10	50	76
VSK-S10-15UA	15	0.7	10	50	78
VSK-S10-24UA	24	0.45	10	50	80

Notes: 1. Ripple and noise measured at 20 MHz bandwidth

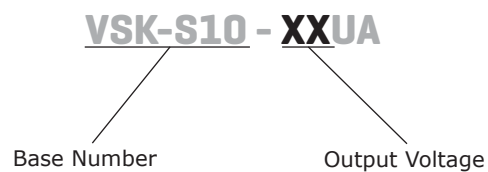PART NUMBER KEY


INPUT

parameter	conditions/description	min	typ	max	units
voltage		85 120		264 370	Vac Vdc
frequency		47		63	Hz
current	at 110 Vac at 230 Vac		230 120		mA mA
inrush current	at 110 Vac at 230 Vac		10 20		A A
external input fuse (recommended)	slow blow, 250 V		2		A

OUTPUT

parameter	conditions/description	min	typ	max	units
line regulation			±0.5		%
load regulation	10 ~ 100%		±1		%
temperature coefficient			0.02		%/°C
hold-up time	at 230 Vac		50		ms
switching frequency			60		kHz

PROTECTIONS

parameter	conditions/description	min	typ	max	units
over current protection				110	%
short circuit protection	auto recovery with no damage from a short on any output				

SAFETY & COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	primary to secondary (for 1 minute)	4,000			Vac
safety approvals	IEC 60950-1, EN 60950-1, UL 60950-1				
safety class	class II				
EMI/EMC ¹	EN 55011 (level B), IEC/EN 61000-4-2 level 4 (8kV/15kV), IEC/EN 61000-4-3, IEC/EN 61000-4-4 level 4 (4kV), IEC/EN 61000-4-5 level 4 (2kV/4kV)				
leakage current	230 V ac, 50 Hz		0.1		mA
RoHS compliant	yes				
MTBF	25°C	300,000			hrs


ENVIRONMENTAL

parameter	conditions/description	min	typ	max	units
operating temperature		-25		70	°C
storage temperature		-40		105	°C
case temperature				95	°C
operating humidity	non-condensing			95	%


Notes: 1. external EMC application circuit is required

DERATING CURVES


1. output power vs. ambient temperature

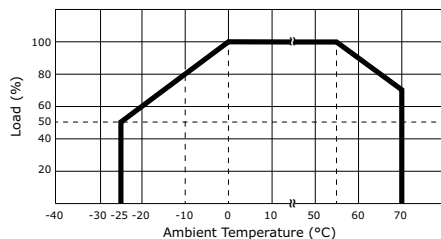

2. output power vs. input voltage [Vac]

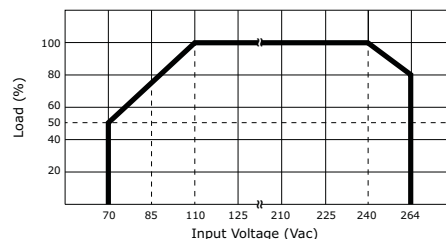

3. output power vs. input voltage [Vdc]



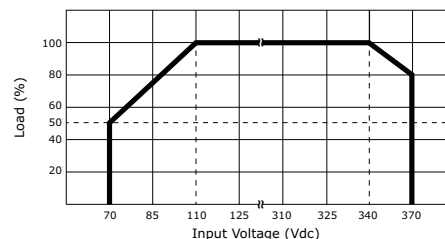


MECHANICAL

parameter	conditions/description	min	typ	max	units
dimensions	2.1 x 1.12 x 0.75 (53.5 x 28.5 x 19.0 mm)				inch
case material	UL94V-0				
weight		47	50	53	g


MECHANICAL DRAWING

units: mm [inches]

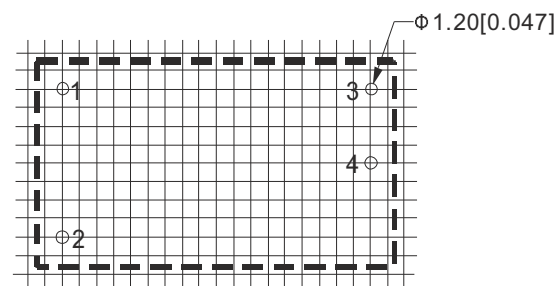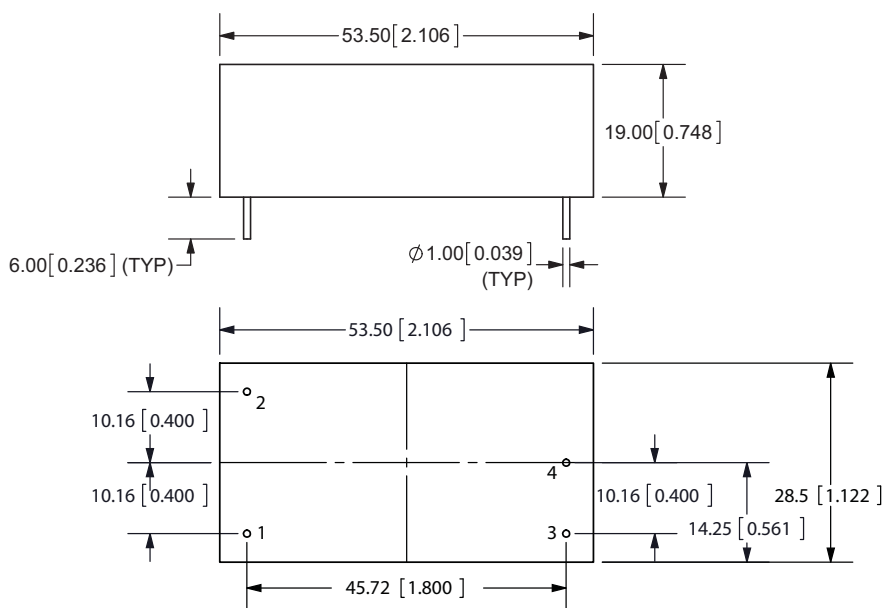tolerance: ± 0.5 [± 0.02]pin section tolerance: ± 0.10 mm [± 0.004]recommended PCB footprint (top view)
grid: 2.54 mm (0.10 inch)

PIN CONNECTIONS	
PIN	FUNCTION
1	AC(N)
2	AC(L)
3	+Vo
4	-Vo

TYPICAL APPLICATION CIRCUIT

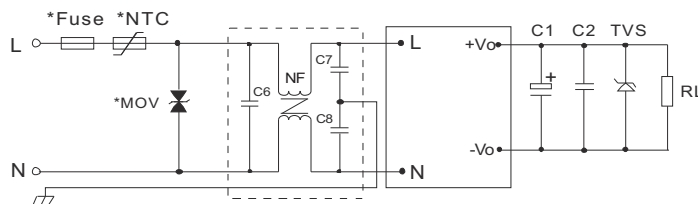

EXTERNAL CAPACITORS TYPICAL VALUE (Unit: μF)			
MODEL	C1	C2	TVS
VSK-S10-3R3UA	220 μF /10 V	0.1 μF /50 V	P6KE6.8A
VSK-S10-5UA	220 μF /10 V	0.1 μF /50 V	P6KE6.8A
VSK-S10-9UA	120 μF /25 V	0.1 μF /50 V	P6KE12A
VSK-S10-12UA	120 μF /25 V	0.1 μF /50 V	P6KE20A
VSK-S10-15UA	120 μF /25 V	0.1 μF /50 V	P6KE20A
VSK-S10-24UA	68 μF /35 V	0.1 μF /50 V	P6KE30A

- Notes:
- Output filtering capacitor C1 is an electrolytic capacitor. It is recommended to use high frequency and low impedance electrolytic capacitors. For capacitance and current of capacitor please refer to manufacture's datasheet. Voltage derating of capacitor should be 80% or above. C2 is ceramic capacitor, it is used to filter high frequency noise. TVS is a recommended component to protect post-circuits (if converter fails).
 - MOV is required to protect the device under surge.
 - It is recommended to use a 2A/250V slow blow FUSE. External input NTC is recommended to use 5D-9.
 - If EMC performance is required, it is recommended to add "EMC filter" at the input end (see EMC Application Figure).
 C6: X capacitor, recommended parameter 0.1 μF /275V;
 C7,C8: Y capacitor, recommended parameter 2200pF/400V;
 NF: common model choke, recommended inductance is about 10mH-30mH.

REVISION HISTORY

rev.	description	date
1.0	initial release	07/26/2011
1.01	added output load vs. input voltage (Vdc) derating curve	03/01/2012
1.02	V-Infinity branding removed	08/21/2012

The revision history provided is for informational purposes only and is believed to be accurate.



CUI INC[®]

Headquarters
 20050 SW 112th Ave.
 Tualatin, OR 97062
800.275.4899

Fax 503.612.2383
cui.com
 techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331