






Copyright FCI.

A


B

C

D

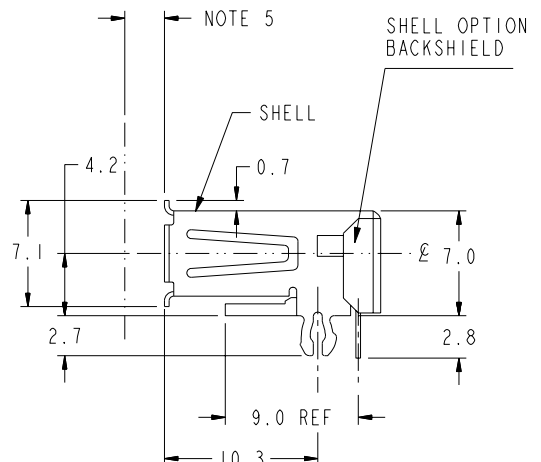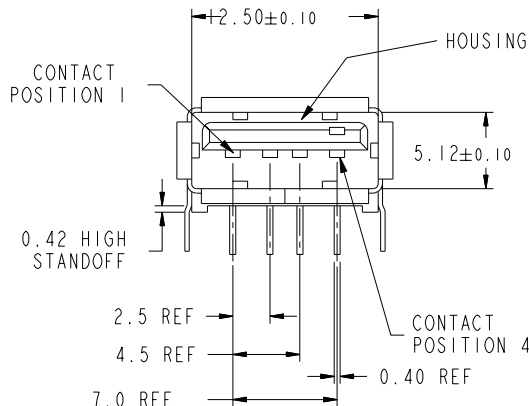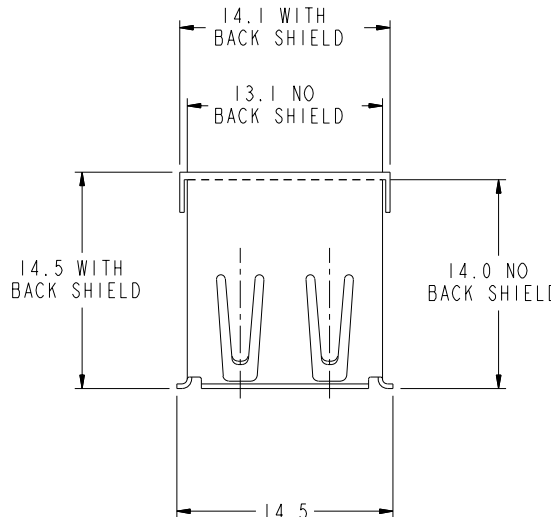

Ø 2.30±0.08	Ø 0.25S	X S	Y S
Ø 0.10L	B S		
-A-			

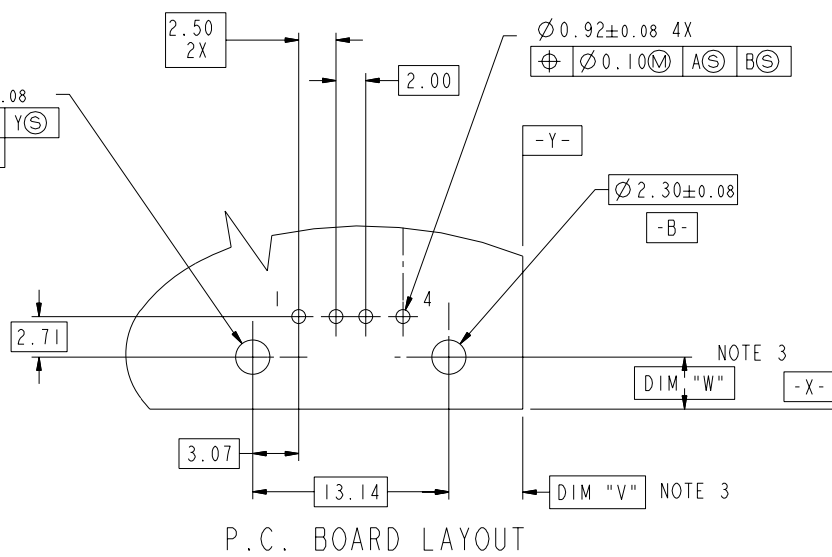

- NOTES:
1. MATERIAL:
CONTACTS: COPPER ALLOY
SHELL: COPPER ALLOY
HOUSING: UL 94V-0 RATED THERMOPLASTIC;
 2. PLATING:
CONTACTS: SEE PRODUCT NUMBER CODE
SHELL: SEE PRODUCT NUMBER CODE;
 3. DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER;
 4. RECOMMENDED PC BOARD THICKNESS OF 1.57mm (EXCEPT STYLE 5 1.20mm)
 5. 2.67mm MAXIMUM PANEL THICKNESS IF MOUNTED BEHIND PANEL;
 6. CONTACT PLATING CODE OPTION 1 DOES NOT MEET THE PLATING SPECIFIED PER UNIVERSAL SERIAL BUS SPECIFICATION REVISION 1.0;
 7. PRODUCT SPEC GS-12-095 & PACKAGING SPEC GS-14-393;
 8. COMPLIED WITH USB 2.0 & TID NUMBER 60000204;
 9. 87520-1010XX, -1012XX, 3010XX, -3012XX, -5010XX, -6010XX AND -7010XXLF DURABILITY MET 5000 CYCLES THE OTHER DASH NUMBER MEET USB 2.0 DURABILITY 1500 CYCLES.
(TO BE CONTINUED)

rev	ecn no	dr	date
AJ	N09-0133	R.B	04/28/2009
AF	N07-0176	WG	07/31/07
AG	N08-0012	R.B	2008/01/23
AH	N08-0238	R.B	2008/11/03

www.fciconnect.com			surface 		tolerance std		projection 		 MM			
			TOLERANCES UNLESS OTHERWISE SPECIFIED									
Dr	FUSSELMAN	3/1/96	ANGULAR		LINEAR		0.X		±0.3		size A4	Scale 4.000
Eng	J. DAVID	3/1/96					0.XX		±0.2			
Chr	J. DAVID	6/5/96	0° ±3°				0.XXX		±		ECN	
Appr	J. DAVID	6/5/96	Product family					Spec ref				
			title USB RECEPTACLE					dwg no 87520				Rev. AJ
			USB									
			catalog no					CUSTOMER				sheet 1 of 3

PRODUCT NUMBER CODE

BASE PRODUCT NUMBER

HOUSING COLOR AND SHELL PLATING OPTIONS

- 0 - WHITE+SHELL TIN & NICKEL PLATING
- 1 - BLACK+SHELL TIN & NICKEL PLATING
- 2 - WHITE+SHELL NICKEL PLATING ONLY
- 3 - BLACK+SHELL NICKEL PLATING ONLY
- 4 - WHITE FR50 + SHELL TIN & NICKEL PLATING FOR NON LEAD FREE P/N'S
CHANGE WHITE FR50 TO WHITE PA46 FOR LEAD FREE P/N'S
- 5 - BLACK NYLON 66 + SHELL TIN & NICKEL PLATING FOR NON LEAD FREE P/N'S
CHANGE BLACK NYLON 66 TO BLACK PA46 FOR LEAD FREE P/N'S
- 6 - WHITE FR50+SHELL TIN & NICKEL PLATING FOR NON LEAD FREE P/N'S
CHANGE WHITE FR50 TO WHITE PA46 FOR LEAD FREE P/N'S
- 7 - WHITE PA46+SHELL TIN & NICKEL PLATING

SHELL TYPE OPTION

- 0 - NO BACK SHIELD, SEE STYLE 1 FOR DURABILITY 1500 CYCLES
SEE STYLE 4 FOR DURABILITY 5000 CYCLES
- 1 - BACK SHIELD, SEE STYLE 2
- 2 - PARTIAL BACK SHIELD, SEE STYLE 3
- 3 - NO BACK SHIELD, SEE STYLE 4 WITH HIGH PERFORMANCE MATERIAL
FOR DURABILITY 12,000 CYCLES, NI PLATING ONLY

MOUNTING HOLE OPTIONS

- 1 - NONE

TERMINAL PLATING OPTION

- 0 - 1.25um Ni UNDERPLATE
0.76um GXT CONTACT AREA
2.50um TIN/LEAD TAIL AREA FOR P/N'S
- 2 - 1.25um Ni UNDERPLATE
0.76um /30u" GOLD CONTACT AREA
2.50um TIN/LEAD TAIL AREA FOR P/N'S

PACKAGING OPTIONS

- A - TAPE AND REEL
- B - TUBES

DATE CODE

SPECIAL OPTION:

- S: PANASONIC ONLY
- B: FOR 1.20mm THICKNESS PCB

LEAD FREE OPTION

- P/N'S WITH SUFFIX "LF" MEAN LEAD FREE PRODUCT
- FOR LEAD FREE P/N, CHANGE ALL ORIGINAL TIN/LEAD PLATING TO PURE TIN PLATING

87520-

X

X

X

X

X


P

X


LF

AVAILABLE PART NUMBER LIST


87520-0010XXLF
87520-0012XXLF
87520-0210XXLF
87520-1010XXLF
87520-1012XXLF
87520-0110XXLF
87520-0112XXLF
87520-1110XXLF
87520-1112XXLF
87520-2010XXLF
87520-2012XXLF
87520-2110XXLF
87520-2112XXLF
87520-2210XXLF
87520-3010XXLF
87520-3012XXLF
87520-3110XXLF
87520-3112XXLF
87520-4010XXLF
87520-4110XXLF
87520-5010XXLF/5010XXSLF
87520-5110XXLF
87520-6010XXLF
87520-7010XXSLF
87520-3010APBLF
87520-3S10XPLF
87520-3S12XPLF
87520-3S10XPBLF
87520-3S12XPBLF




STYLE 1 WITHOUT BACK SHELL




STYLE 2 WITH BACK SHELL



STYLE 4 WITHOUT BACK SHELL



STYLE 5 WITHOUT BACK SHELL
FOR 1.20mm THICKNESS PCB
87520-3X10APBLF

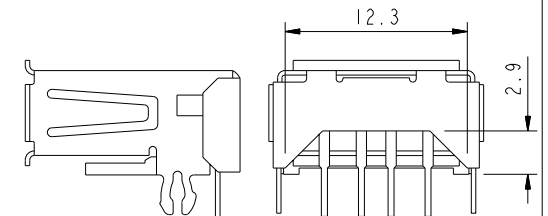

STYLE 3 WITH PARTIAL BACK SHELL







(CONTINUED)

10. PACKING STANDARD GS-14-920
WILL BE APPLIED FOR LEAD FREE P/N'S;
11. FOR LEAD FREE P/N, THE PRODUCT MEET
EUROPEAN UNION DIRECTIVES AND
OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008;
12. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK
TEMPERATURE FOR 40 SECONDS IN A CONVECTION, INFRO-RED
OR VAPOR PHASE REFLOW OVEN;
13. 87520-1010XXLF/-3010XXLF/-5010XXLF CAN WITHSTAND 2Amps
CURRENT EITHER PARALLEL OR SERIALS
(TESTING PLUG WITH 20 AWG WIRE);
14. THE PRODUCT CAN BE USED FOR PIP PROCESS.

FOR 87520-1010XXLF
-1012XXLF
-3010XXLF
-3012XXLF
-5012XXLF
-6010XXLF
-7010XXSLF
-3S10XPLF
-3S12XPLF

www.fciconnect.com			surface 		tolerance std				MM 	
			TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr	FUSSELMAN	3/1/96	ANGULAR		LINEAR		0.X	±0.3	size A4	Scale 4.000
Eng	J. DAVID	3/1/96					0.XX	±0.2		
Chr	J. DAVID	6/5/96	0°	±3°			0.XXX	±	ECN	
Appr	J. DAVID	6/5/96	Product family						Spec ref	
			title USB RECECPTACLE				dwg no 87520			Rev. AJ
			catalog no				CUSTOMER			sheet 2 of 3

PART NUMBER
87520-3010APBLF
87520-3SI0XPBLF
87520-3SI2XPBLF

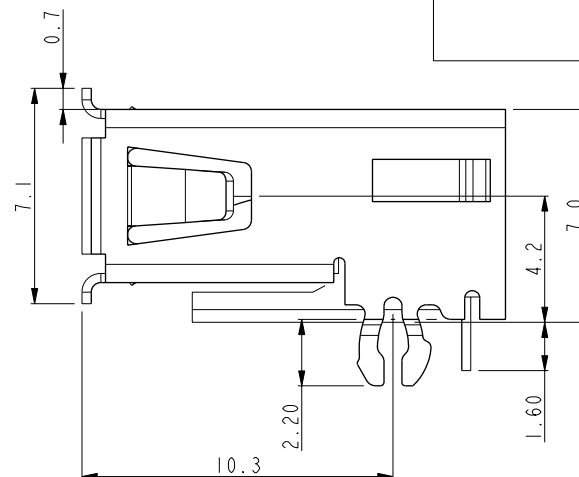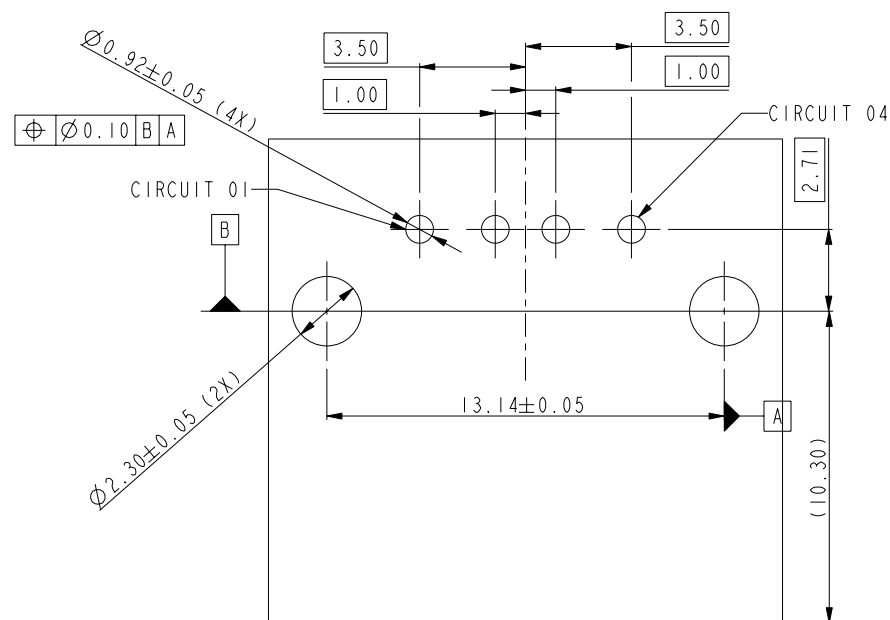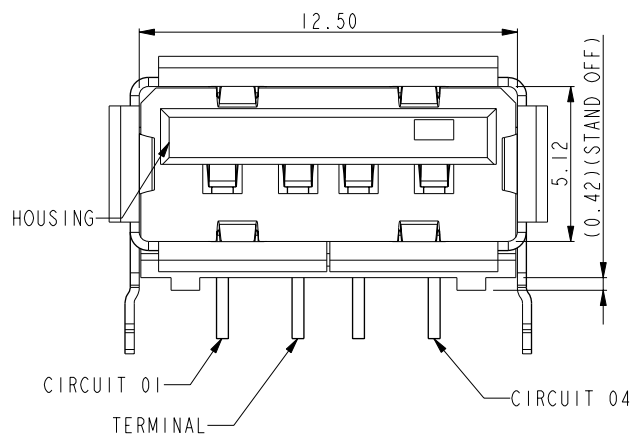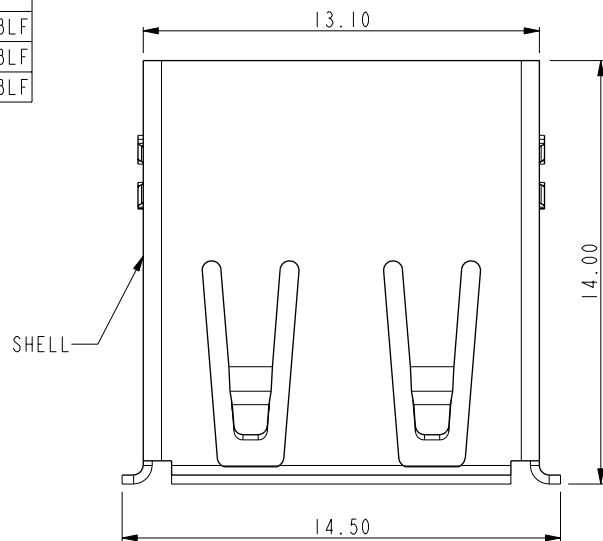

RECOMMENDED PCB LAYOUT
COMPONENT SIDE

www.fciconnect.com			surface 		tolerance std		projection 		MM 								
			TOLERANCES UNLESS OTHERWISE SPECIFIED														
Dr	FUSSELMAN	3/1/96	ANGULAR		LINEAR		0.X		±0.3		size A4	Scale 4.000					
Eng	J. DAVID	3/1/96					0.XX		±0.2								
Chr	J. DAVID	6/5/96	0° ±3°				0.XXX		±		ECN						
Appr	J. DAVID	6/5/96	Product family						Spec ref								
		title					USB RECEPTACLE					dwg no 87520		Rev AJ			
		USB															
		catalog no										CUSTOMER			sheet 3 of 3		



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331