

# USB Series Varistor

## Multilayer Varistors for Universal Serial BUS Protection

### GENERAL DESCRIPTION

USB Series varistors are designed to protect the high speed data lines against ESD transients. They have very low capacitance and fast turn on times that make this series ideal for data and transmission lines with high data rates. The unique design enables these devices to meet the rigorous testing criteria of the **IEC 61000-4-2** standards. New and improved manufacturing process has created these USB series to be one of the best plated varistors in the market today.

### FEATURES

- Zinc Oxide (ZnO) based ceramic semiconductor devices with non-linear voltage-current characteristics
- Bi-directional device, similar to back-to-back Zener diodes plus an EMC capacitor in parallel
- Entire structure made up of conductive ZnO grains surrounded by electrically insulating barriers, creating varistor-like behavior
- Electrical advantages over Zener diodes are repetitive strike capability, high in rush current capability, fast turn-on-time and EMI attenuation
- Protects against ESD to meet **IEC 61000-4-2** 15kV (air) and 8kV (contact)
- Low capacitance for high speed data lines
- Available in discrete and array packages (2 and 4 element)
- Low Clamping Voltage
- Low Operating Voltage
- Response time is < 1ns

### MECHANICAL CHARACTERISTICS


- Available in EIA 0603 (Single), 0405 (Dual) and 0612 (Quad) cases
- Plated Tin over Nickel Barrier
- Packaged in Tape & Reel

### PART NUMBERING

| USB   | 0001                                                                                                                       | D                                                                                                     | P                        |
|-------|----------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|--------------------------|
| Style | Case Size                                                                                                                  | Packaging Code<br>(Reel Size)                                                                         | Termination              |
|       | 0001 = 0603 (Single)<br>0002 = 0405 (2-Element)<br>0004 = 0612 (4-Element)<br>0005 = 0402 (Single)<br>0006 = 0402 (Single) | D = 7" (1,000 pcs.)<br>R = 7" (4,000 pcs.)<br>T = 13" (10,000 pcs.)<br>W = 7" (10,000 pcs. 0402 only) | P = Ni/Sn Alloy (Plated) |

### TYPICAL APPLICATIONS

- USB BUS Lines/Firewire Data BUS Lines
- I/O BUS Lines
- 10/100/1000 Ethernet Transmission Lines
- Video Card Data Lines
- Handheld Devices
- Laptop Computers
- LCD Monitors

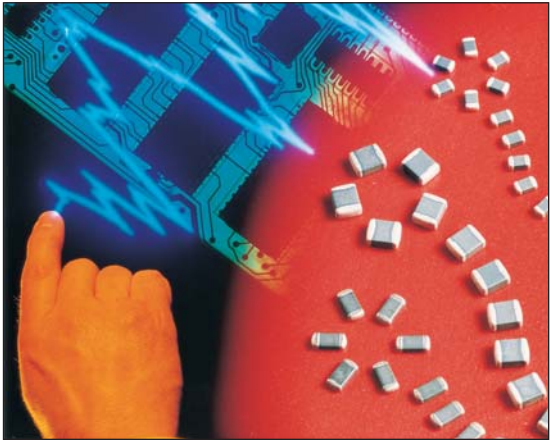

### PINOUT CONFIGURATION

|                                                           |  |
|-----------------------------------------------------------|--|
| <b>USB0001/0005/0006</b><br><b>0603 and 0402 (Single)</b> |  |
| <b>USB0002</b><br><b>0405 (Dual)</b>                      |  |
| <b>USB0004</b><br><b>0612 (Quad)</b>                      |  |



# USB Series Varistor



## Multilayer Varistors for Universal Serial BUS Protection

### RATINGS

|                       |                 |
|-----------------------|-----------------|
| Air Discharge ESD     | 15kV            |
| Contact Discharge ESD | 8kV             |
| Operating Temperature | -55°C to +125°C |
| Soldering Temperature | 230°C           |


### PERFORMANCE CHARACTERISTICS

| AVX Part No. | V <sub>W</sub> (DC) | V <sub>W</sub> (AC) | V <sub>B</sub> | I <sub>L</sub> | E <sub>T</sub> | I <sub>P</sub> | Cap. | Case Size | Elements |
|--------------|---------------------|---------------------|----------------|----------------|----------------|----------------|------|-----------|----------|
| USB0001__    | ≤18                 | ≤14                 | 120            | 2              | 0.015          | 4              | 10   | 0603      | 1        |
| USB0002__    | ≤18                 | ≤14                 | 70             | 2              | 0.015          | 4              | 10   | 0405      | 2        |
| USB0004__    | ≤18                 | ≤14                 | 100            | 2              | 0.015          | 4              | 10   | 0612      | 4        |
| USB0005__    | ≤18                 | ≤14                 | 300            | 2              | 0.015          | 4              | 3    | 0402      | 1        |
| USB0006__    | ≤18                 | ≤14                 | 65             | 2              | 0.015          | 4              | 6    | 0402      | 1        |


Termination Finish Code  
Packaging Code

- V<sub>W</sub> (DC) DC Working Voltage (V)
- V<sub>W</sub> (AC) AC Working Voltage (V)
- V<sub>B</sub> Typical Breakdown Voltage (V @ 1mA<sub>DC</sub>)
- I<sub>L</sub> Maximum Leakage Current at the Working Voltage (μA)
- E<sub>T</sub> Transient Energy Rating (J, 10x1000μS)
- I<sub>P</sub> Peak Current Rating (A, 8x20μS)
- Cap Typical Capacitance (pF) @ 1 MHz and 0.5Vrms

### USB TYPICAL S21 CHARACTERISTICS

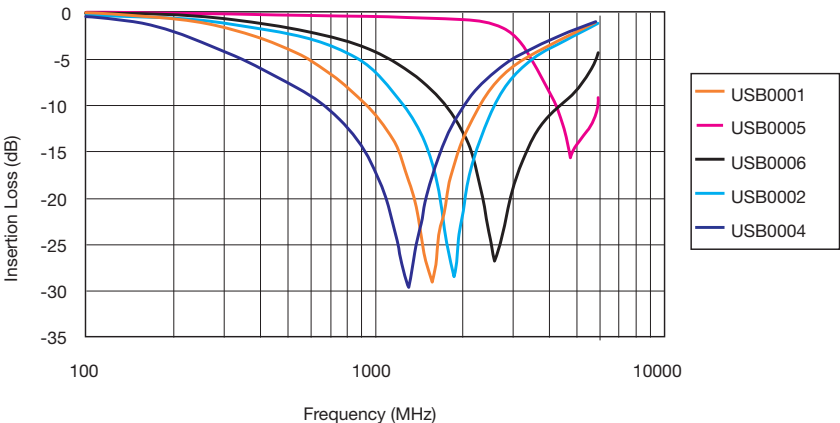

### Typical Pulse Rating Curve

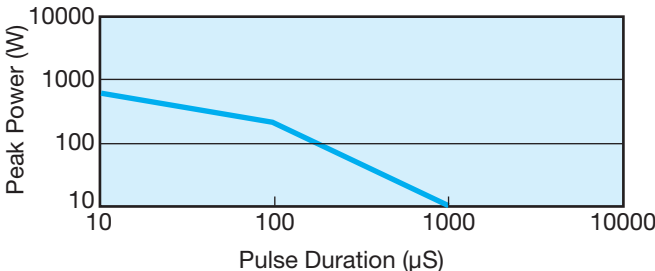


# USB Series Varistor




## Multilayer Varistors for Universal Serial BUS Protection

### PHYSICAL DIMENSIONS AND PAD LAYOUT


**USB0001/5/6 (Single)**

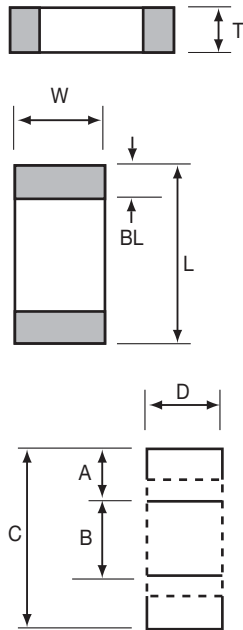

**USB0002 (Dual)**

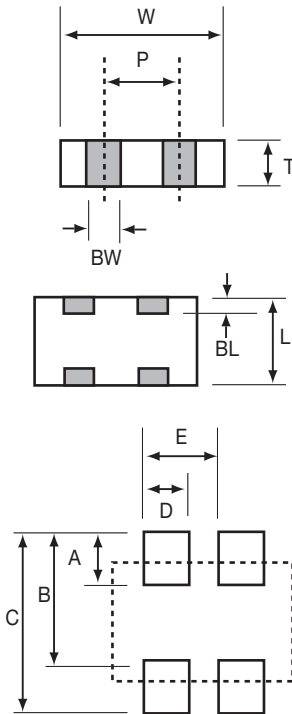

**USB0004 (Quad)**

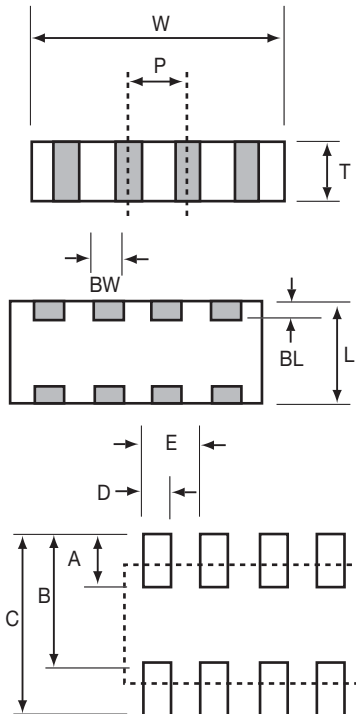

**mm (inches)**

| L                          | W                          | T                        | BW                         | BL                                                              | P                       |
|----------------------------|----------------------------|--------------------------|----------------------------|-----------------------------------------------------------------|-------------------------|
| <b>USB0001</b>             |                            |                          |                            |                                                                 |                         |
| 1.60±.15<br>(0.063±0.006)  | 0.80±0.15<br>(0.032±0.006) | 0.90 Max<br>(0.035 Max.) | N/A                        | 0.35±0.15<br>(0.014±0.006)                                      | N/A                     |
| <b>USB0002</b>             |                            |                          |                            |                                                                 |                         |
| 1.00±0.15<br>(0.039±0.006) | 1.37±0.15<br>(0.054±0.006) | 0.66 Max<br>(0.026 Max.) | 0.36±0.10<br>(0.014±0.004) | 0.20±0.10<br>(0.008±0.004)                                      | 0.64 REF<br>(0.025 REF) |
| <b>USB0004</b>             |                            |                          |                            |                                                                 |                         |
| 1.60±0.20<br>(0.063±0.008) | 3.20±0.20<br>(0.126±0.008) | 1.22 Max<br>(0.048 Max.) | 0.41±0.10<br>(0.016±0.004) | 0.18 <sup>+0.25/-0.08</sup><br>(0.007 <sup>+0.01/-0.003</sup> ) | 0.76 REF<br>(0.030 REF) |
| <b>USB0005 / USB0006</b>   |                            |                          |                            |                                                                 |                         |
| 1.0±0.10<br>(0.040±0.004)  | 0.50±0.10<br>(0.020±0.004) | 0.60 Max<br>(0.024 Max.) | N/A                        | 0.25±0.15<br>(0.010±0.006)                                      | N/A                     |

**mm (inches)**

| A                        | B               | C               | D               | E               |
|--------------------------|-----------------|-----------------|-----------------|-----------------|
| <b>USB0001</b>           |                 |                 |                 |                 |
| 0.89<br>(0.035)          | 0.76<br>(0.030) | 2.54<br>(0.100) | 0.76<br>(0.030) | N/A             |
| <b>USB0002</b>           |                 |                 |                 |                 |
| 0.46<br>(0.018)          | 0.74<br>(0.029) | 1.20<br>(0.047) | 0.30<br>(0.012) | 0.64<br>(0.025) |
| <b>USB0004</b>           |                 |                 |                 |                 |
| 0.89<br>(0.035)          | 1.65<br>(0.065) | 2.54<br>(0.100) | 0.46<br>(0.018) | 0.76<br>(0.030) |
| <b>USB0005 / USB0006</b> |                 |                 |                 |                 |
| 0.61<br>(0.024)          | 0.51<br>(0.020) | 1.70<br>(0.067) | 0.51<br>(0.020) | N/A             |





# USB Series Varistor



## Multilayer Varistors for Universal Serial BUS Protection

### APPLICATIONS

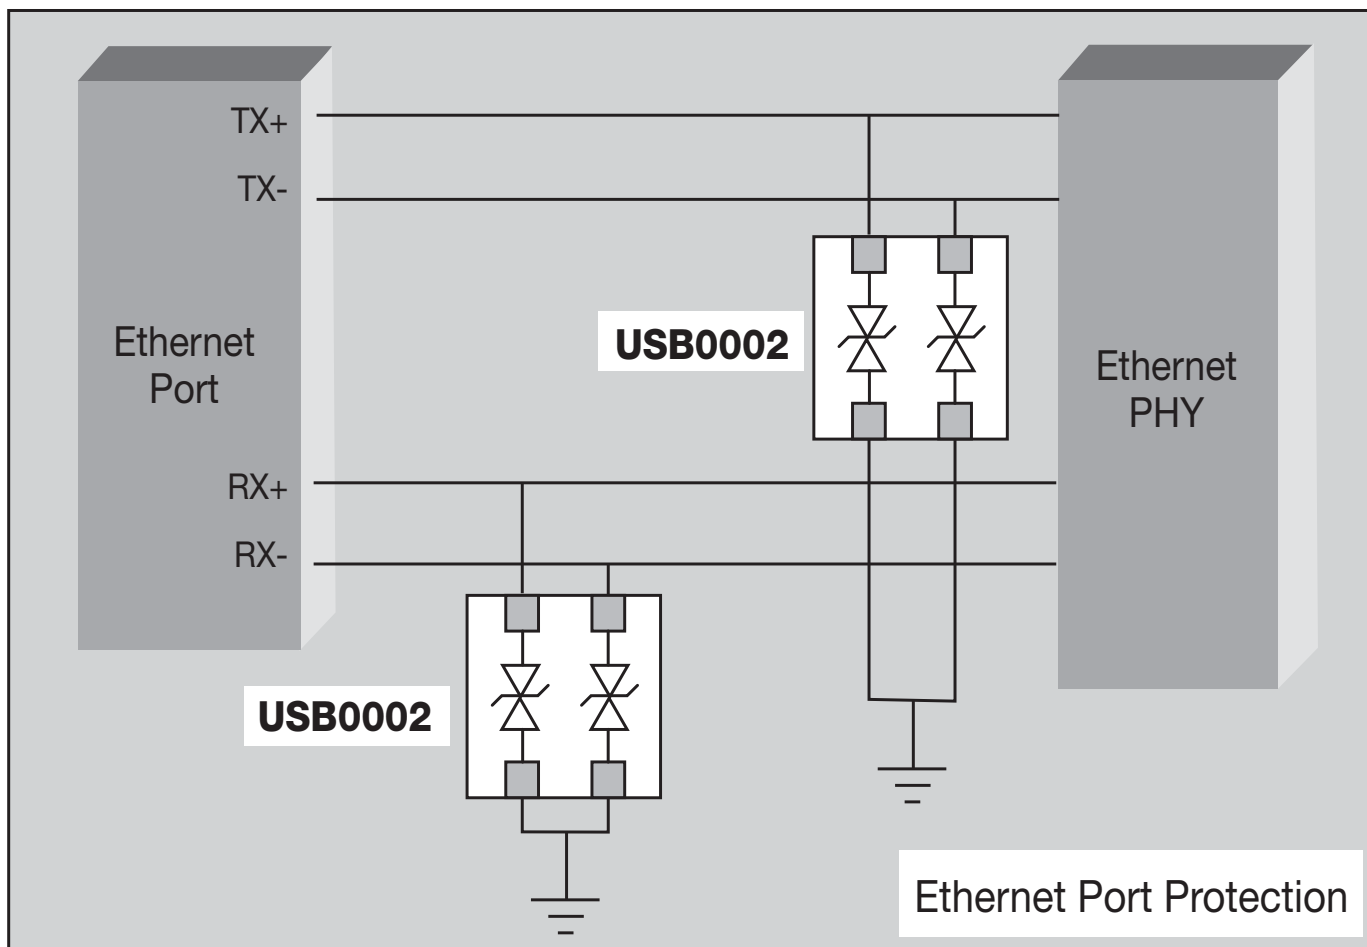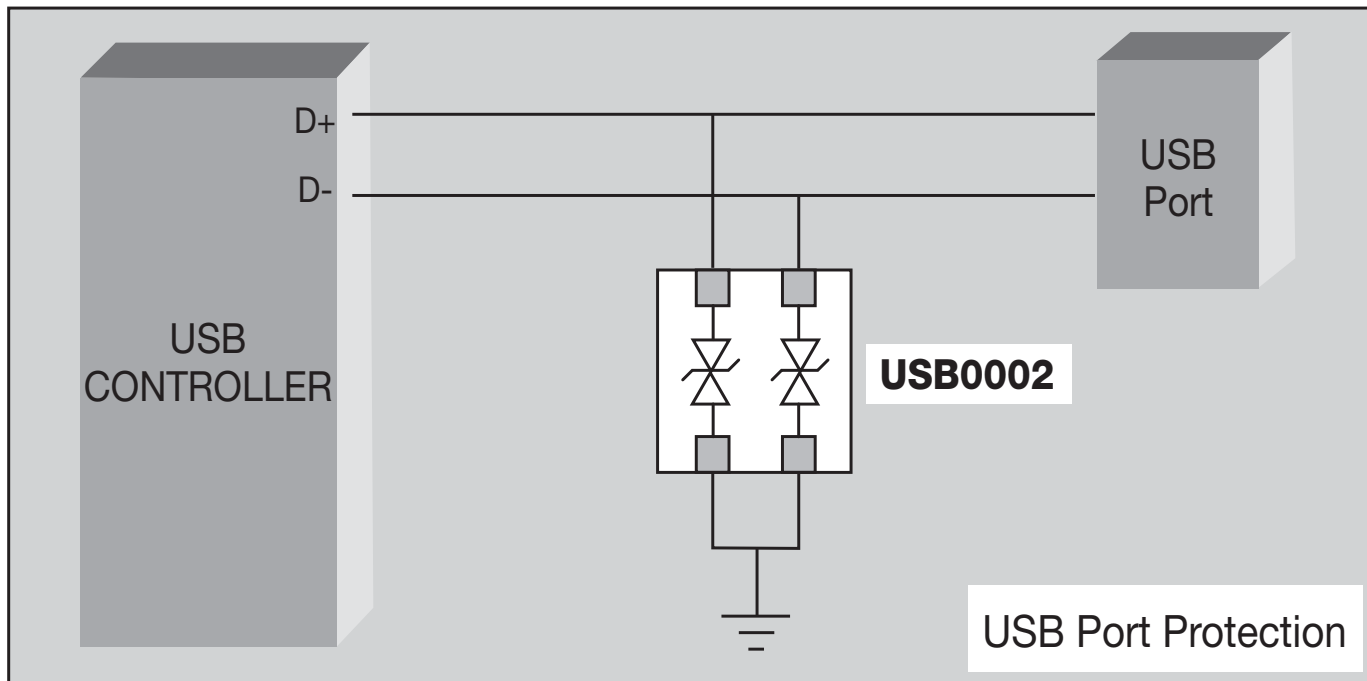



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331