

SA.31m, SA.33m, & SA.35m

Quantum Miniature Atomic Clock (MAC)



Miniature Rubidium Atomic Clock

Features

- Highest precision atomic clock
- Smallest form factor (smaller than most OCXOs)
- Standard quartz oscillator pinouts
- Low power consumption
- RoHS 6/6 compliant

Applications

- Stand-alone (free-run) stable frequency source (for UMTS or LTE)
- Extended holdover for CDMA and WiMAX base stations
- Stability for various other communication and transmission applications

Newly Enhanced Quantum™ MAC SA.3X Family

The Microsemi® SA.3Xm marks a major step forward in the evolution of rubidium atomic clocks. Based on a new generation of atomic clock technology, the SA.3Xm family has a unique physics package that enables unprecedented miniaturization in a rubidium clock. It is suitable for applications requiring compact design, low power consumption, extended aging and precision in an economical and easily adaptable package.

Smallest Commercially Available Rubidium Clock

Microsemi has leveraged significant advances in physics miniaturization and integration to design the world's first commercially available miniature atomic clock. The SA.3Xm has the physical dimensions and packaging of a small ovenized crystal oscillator (OCXO), measuring 51 mm X 51 mm (2" X 2") and standing at a mere 18 mm (0.7"). The MAC is the world's first commercially available Rubidium Coherent Population Trapping atomic clock. It consumes less power and has wide-spectrum temperature operation. This makes it useful for to a range of timing and synchronization applications, from wireless base station, wire line network infrastructure, defense system, and to test and measurement devices. The SA.3Xm smaller dimensions enable it to be easily PCBA mountable.

SA.31m

The SA.31m is targeted for applications where an economical solution for frequency stability is required, such as UMTS (WCDMA) or LTE. It can be used as an independent frequency source for base stations, and enable transition from costly TDM Backhaul transport to economic and efficient Ethernet transport.

SA.33m

The SA.33m has superior aging and tempco, and better stability and phase noise than the SA.31m. The SA.33m may be deployed in existing rubidium applications, such as extended holdover (for CDMA / CDMA 2000 or WiMAX).

SA.35m

The SA.35m is the premium grade of the entire SA.3Xm family. It has better aging, the best tempco, and greatest performance amongst all the versions of the family. The SA.35m is ideally suited for applications such as extended hold over for LTE-TDD base stations and other applications where precision frequency and long hold-over are required. Economical for its performance level, the SA.35m delivers premium performance at an excellent price.



Microsemi invented portable atomic timekeeping with QUANTUM™, the world's first family of miniature and chip scale atomic clocks.

Choose QUANTUM™ class for best-in-class stability, size, weight and power consumption.

SA.31m, SA.33m & SA.35m

Specifications

ELECTRICAL SPECIFICATIONS

Output Frequency/Waveform:	10 MHz
	3.3 volt AC MOS square wave
Logic Level:	VL<0.5V, VH>2.7V (15pf load)
Rise/Fall Time:	<10 ns
Duty Cycle:	50%+/-10%
Phase Noise (SSB)	
	SA.35m / SA.33m SA.31m
1Hz	≤-70 dBc/Hz ≤-65 dBc/Hz
10Hz	≤-87 dBc/Hz ≤-85 dBc/Hz
100Hz	≤-114 dBc/Hz ≤-112 dBc/Hz
1kHz	≤-130 dBc/Hz ≤-130 dBc/Hz
10kHz	≤-140 dBc/Hz ≤-140 dBc/Hz
Spurious:	
Non-Harmonic:	<-85 dBc
Temperature Coefficient [peak to peak]:	
	SA.35m SA.33m SA.31m
[0°C to 70°C]	≤7E-11 ≤1E-10 ≤7E-10
[-10°C to 75°C]	≤1E-10 ≤1.5E-10 ≤1E-9
Accuracy at shipment:	<±5E-11 [25°C]
Retrace:	<±5E-11 (on-off-on: 24hr, 48hr, 12hr @25°C)
Control range:	
With analog input:	±1E-8, 0-5v into 5k Ω
With digital input:	±1E-6 (with resolution ±1E-12)
Warm-up time:	time to <1E-9 @25°C C: <7.5 min (if mounted on the developer's kit heat sink: <9 min)
Supply voltage/current:	+5 Vdc ±0.1 Vdc, Max. current <2.8 Amps
Power consumption:	Warm-up: 14W max [-10°C to +75°C]; Operating: 8W @ -10°C, 5W @ 25°C, 5W @ 75°C baseplate
Voltage coefficient:	+5 Vdc ±0.1 Vdc: Magnitude (df/f) <2E-11 peak-to-peak
Test / status:	Built-in self-test (BITE)
ACMOS:	Service / fault-unlock
Serial Port:	Microsemi specific serial port protocol for status and control

Aging:

Type	SA.35m / SA.33m	SA.31m
Daily*	±2.5E-11	±4E-11
Monthly*	±1E-10	±3E-10
Yearly	±1E-9	±1.5E-9

(*After 1 day & 1 month of operation respectively)

Short Term Stability (Allan deviation):

Type	SA.35m / SA.33m	SA.31m
t=1s	≤3E-11	≤5E-11
t=10s	≤1.6E-11	≤2.5E-11
t=100s	≤8E-12	≤1E-11

7200 MDEV: SA.35m ≤7E-13

(not specified for SA.31m and SA.33m)

Time drift in a 24-hr period

(SA.33m & SA.35m only): <7μs over 0°C to +60°C

MTBF:

Per MIL-HDBK-217F:

≥20 years @ 40°C (Ground, fixed, uncontrolled, GF)

≥17 years @ 40°C (Ground, fixed, controlled, GB)

Per Telcordia SSR 332, Issue 1:

≥20 years @ 40°C (Ground, fixed, uncontrolled)

Connector: 5 Pins match standard OCXO configurations

Pin 1: Input frequency control

Pin 2*: Baseplate (connect to GND externally)

Pin 3: Output signal

Pin 4*: Ground (signal & supply)

Pin 5: Input supply (+)

* Pin 2 & Pin 4 are not connected internally

Three (3) additional pins for added functionality:

Pin 6: BITE

Pin 7: RS232 transmit (Tx)

Pin 8: RS232 receive (Rx)

ENVIRONMENTAL


Operating temperature:	-10° C to +75° C base-plate
Magnetic field sensitivity:	<±7E-11/Gauss (up to ±2 Gauss)
Humidity:	GR-63-CORE, Issue 4, April 2012, Section 4.1.2
Vibration (operating):	7.7 grms @ 1 hr/axis per MIL-STD-810, Fig 514.7E-1, Category 24 (General Minimum Integrity Exposure). No loss of lock.
Shock (operating):	30g, 11 msec half-sine pulse per MIL-STD-202, Method 213, Test Condition J. Frequency perturbation ≤ 1 e-9 momentary.
Storage & transport (non operating):	
Temperature:	-55°C to +100°C
Vibration (non-operating, unpackaged):	10.9 grms @ 1 hr/axis per MIL-STD-810, Fig 514.7E-1, Cat 24.
Shock (non-operating, unpackaged):	50g, 11 msec half-sine pulse per MIL-STD-202, Method 213, Test Condition A.

PHYSICAL

Weight:	<85 gm (<3 oz)
Size:	18 mm (0.7") H X 51 mm
Volume:	<46.5 cm3 (< 2.8 in3)

RoHS COMPLIANCE

- SA.31m, SA.33m, and SA.35m are 6/6 RoHS Compliant

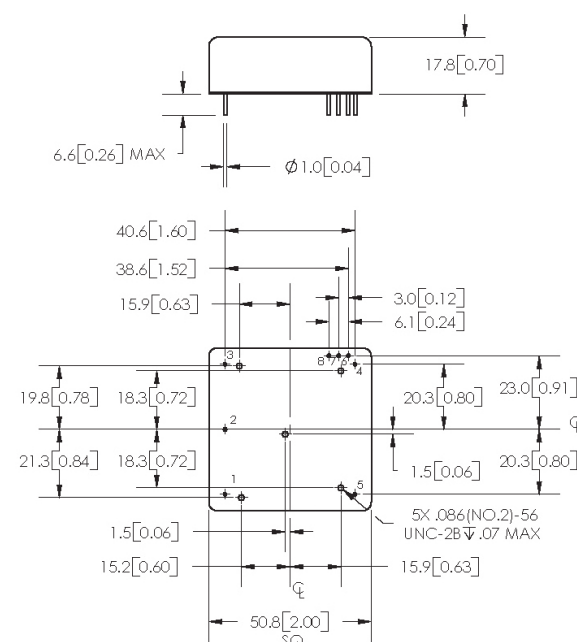

For PCB mounted application using screws: To avoid damage to the SA.3xm use (5) custom 2-56 screws with length of 0.140" for mounting to a .06" thick PCB. Screw kits are available upon request from Microsemi

Measurement in millimeters: 00.00
Measurement in inches: [0.00]

SA.31m, SA.33m & SA.35m

Part Number Table

Part Number	Description
090-44310-21	SA.31M RUBIDIUM CLOCK, AT DISABLED
090-44310-22	SA.31M RUBIDIUM CLOCK, AT ENABLED
090-44330-21	SA.33M RUBIDIUM CLOCK, AT DISABLED
090-44330-22	SA.33M RUBIDIUM CLOCK, AT ENABLED
090-44330-23	SA.33M RUBIDIUM CLOCK (AT ENABLED) ROHS 6/6 (MEASURED TIME TO LOCK <7 MIN)
090-44330-24	SA.33M RUBIDIUM CLOCK (AT DISABLED) ROHS 6/6 (MEASURED TIME TO LOCK <7 MIN)
090-44350-21	SA.35M RUBIDIUM CLOCK, AT DISABLED
090-44350-22	SA.35M RUBIDIUM CLOCK, AT ENABLED
090-44300-00	SA.3Xm Developer's Kit

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.



Microsemi

Microsemi Corporate Headquarters
One Enterprise, Aliso Viejo, CA 92656 USA
Within the USA: +1 (800) 713-4113
Outside the USA: +1 (949) 380-6100
Sales: +1 (949) 380-6136
Fax: +1 (949) 215-4996
email: sales.support@microsemi.com
www.microsemi.com

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for communications, defense & security, aerospace and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; security technologies and scalable anti-tamper products; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, Calif., and has approximately 3,400 employees globally. Learn more at www.microsemi.com.

©2015 Microsemi Corporation. All rights reserved. Microsemi and the Microsemi logo are registered trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331