

Features Evaluation Module Accessory

- Accessory for the R-78S3.3-0.1-EVM-1
- Mates with SensiBLE v1.0

RECOM
Evaluation Module
Accessory


R-78S3.3-0.1-EVM-1/SBL-1

Description

The R-78S3.3-0.1-EVM-1/SBL-1 is a breakout board developed to be used with a SensiBLE v1.0 ⁽¹⁾ module from SensiEDGE and the R-78S3.3-0.1-EVM-1 evaluation module to demonstrate IoT applications using the SensiBLE v1.0 module. Functions of the SensiBLE v1.0 module include 3-axis accelerometer, 3-axis magnetometer, 3-axis digital gyroscope, pressure, microphone, relative humidity, ambient light and temperature sensors. SensiBLE v1.0 contains an on-board coin battery which must be removed prior to connecting to the R-78S3.3-0.1-EVM-1/SBL-1. When supplied by R-78S3.3-0.1-EVM-1 with a AA battery, operation lifetime increases dramatically.

Notes:

Note1: The SensiBLE v1.0 module from SensiEDGE is not provided by RECOM

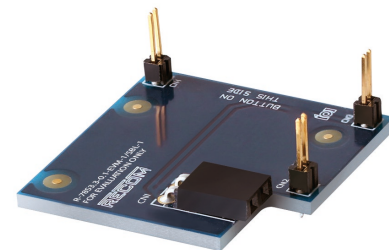

Quick Start Guide

- Insert the AA battery into the battery holder.
- Ensure that the coin battery is removed from the SensiBLE v1.0 module.
- Insert the SensiBLE v1.0 module onto the R-78S3.3-0.1-EVM-1/SBL-1, and plug into header J7 (refer to pictures for correct orientation).
- Turn on using the switch on the R-78S3.3-0.1-EVM-1 (Note: to reduce the power consumption, no indicator LED is fitted). Remember to switch off to conserve the battery.
- To connect with the SensiBLE v1.0 module, download and install the ST BlueMS App on your mobile phone and touch "START SCANNING".




- This breakout board only connects to the power terminals of the SensiBLE v1.0 module.
- Communication is via Bluetooth (App available).
- CN2-pin 1 is connected to GND.
- CN3-pin 1 is connected to VDDUSB (with connection to R-78S3.3-0.1-EVM-1 it is 3.3V).
- All the other pins are not connected and serve only as mechanical connections.



www.recom-power.com/eval-ref-boards


Schematic

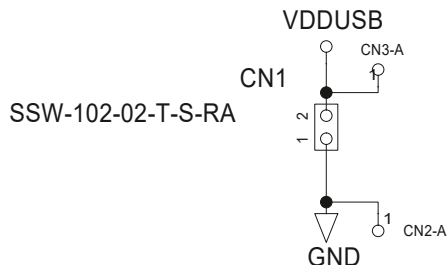


DIMENSION AND PHYSICAL CHARACTERISTICS

Parameter	Type	Value
Dimension (LxWxH)		30.0 x 30.0 x 12.0mm
Weight		3.3g typ.


Layout

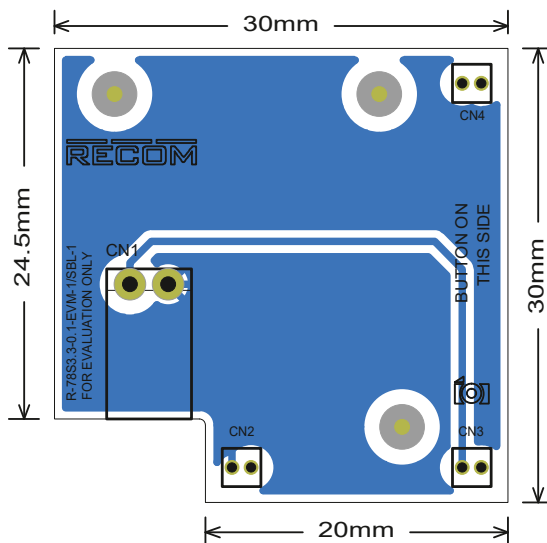

R-78S3.3-0.1-EVM-1/SBL-1 with the SensiBLE v1.0 module



Assembled R-78S3.3-0.1-EVM-1/SBL-1 on the R-78S3.3-0.1-EVM-1

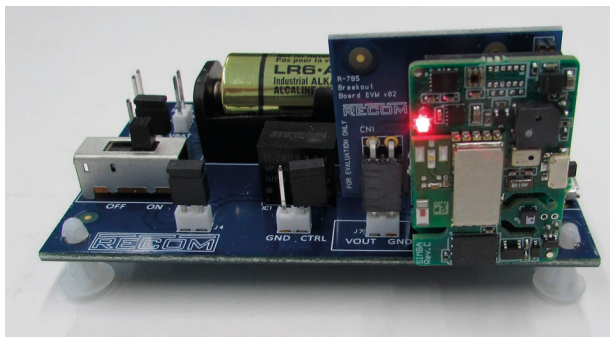

PACKAGING INFORMATION

Parameter	Type	Value
Packaging Dimension (LxWxH)	airbag	45.0 x 100.0 x 12.0mm
Packaging Quantity		1pcs

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331