


# CUSTOMER DRAWING



REV:  
A

DATE:  
Aug 21, 2008

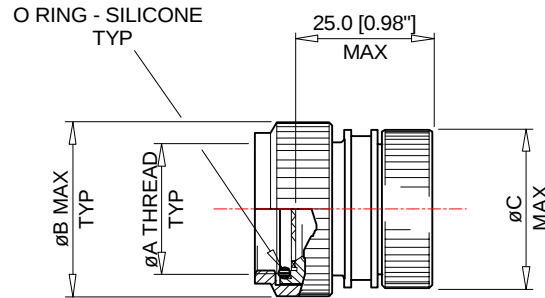


## STRAIGHT ADAPTOR

-00

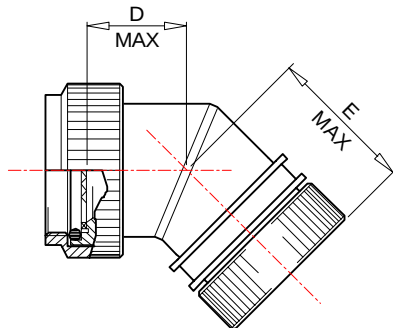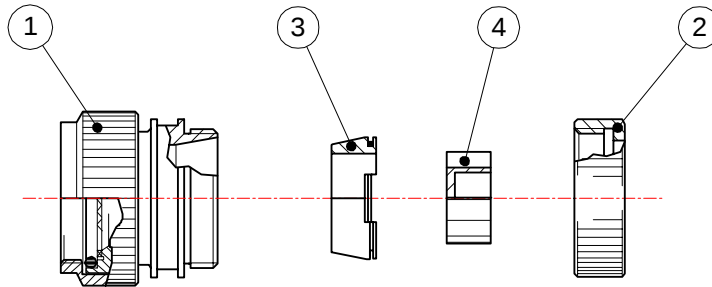

## 45° ADAPTOR

-45

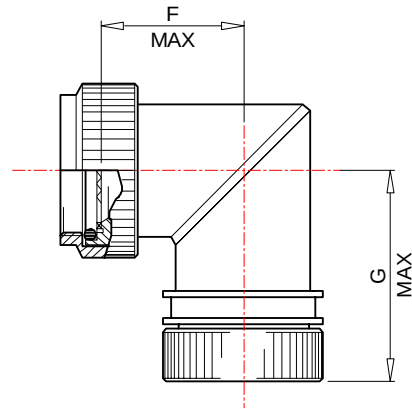

## 90° ADAPTOR

-90

© 2008 Tyco Electronics. All rights reserved.



**Raychem**  
Wire and Harnessing Products  
300 Constitution Drive  
Menlo Park, CA 94025, USA

TITLE:

**HEXASHIELD ADAPTOR FOR  
CODE 40 CONNECTORS  
PLAIN CLAMPING NUT**

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN MILLIMETERS.  
INCH DIMENSIONS ARE SHOWN IN  
BRACKETS

Tyco Electronics reserves the right to amend this drawing at  
any time. Users should evaluate the suitability of the  
product for their application.

DOCUMENT NO.

**HEX40-KC-YY-YY-AYY-1-YY**

DRAWN:  
IRT

DATE:  
OCT 07

CAGE CODE:  
06090

DCR #  
ECO-08-019355

FILE:  
87002/40-KC-1

SCALE:  
NONE

SHEET:  
1 OF 4

If this document is printed it becomes uncontrolled. Check for the latest revision.

# CUSTOMER DRAWING

REV:  
A

DATE:  
Aug 21, 2008

## KIT DESCRIPTION

| ITEM | DESCRIPTION          | MATERIAL        |
|------|----------------------|-----------------|
| 1    | BODY ASSEMBLY        | STAINLESS STEEL |
| 2    | CLAMPING NUT - PLAIN | STAINLESS STEEL |
| 3    | CONIC RING           | STAINLESS STEEL |
| 4    | STAR - PLAIN         | STAINLESS STEEL |

## TABLE OF DIMENSIONS

| Order Number | Shell Size |      | ØA Thread Class 6H | ØB Max          | ØC Max          | D Max           | E Max           | F Max           | G Max           | Ferrule Quantity |                |
|--------------|------------|------|--------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|------------------|----------------|
|              | Mil.       | Com. |                    |                 |                 |                 |                 |                 |                 | Std.             | Optional       |
| 09           | A          | 09   | M12 x 1            | 19.0<br>[0.75"] | 17.5<br>[0.69"] | 12.5<br>[0.49"] | 25.5<br>[1.00"] | 16.0<br>[0.63"] | 29.0<br>[1.14"] | 1                | -              |
| 11           | B          | 11   | M15 x 1            | 22.0<br>[0.87"] | 21.5<br>[0.85"] | 13.0<br>[0.51"] | 26.0<br>[1.02"] | 17.5<br>[0.69"] | 30.5<br>[1.20"] | 2                | -              |
| 13           | C          | 13   | M18 x 1            | 25.5<br>[1.00"] | 22.5<br>[0.89"] | 14.0<br>[0.55"] | 26.5<br>[1.04"] | 19.0<br>[0.75"] | 32.0<br>[1.26"] | 3                | -              |
| 15           | D          | 15   | M22 x 1            | 30.5<br>[1.20"] | 25.5<br>[1.00"] | 14.5<br>[0.57"] | 27.5<br>[1.08"] | 20.5<br>[0.81"] | 33.5<br>[1.32"] | 5                | -              |
| 17           | E          | 17   | M25 x 1            | 33.5<br>[1.32"] | 28.5<br>[1.12"] | 15.0<br>[0.59"] | 28.0<br>[1.10"] | 22.0<br>[0.87"] | 35.0<br>[1.38"] | 6                | 7              |
| 19           | F          | 19   | M28 x 1            | 37.0<br>[1.46"] | 31.5<br>[1.24"] | 15.5<br>[0.61"] | 28.5<br>[1.12"] | 23.5<br>[0.93"] | 36.5<br>[1.44"] | 7                | -              |
| 21           | G          | 21   | M31 x 1            | 38.5<br>[1.52"] | 35.0<br>[1.38"] | 16.5<br>[0.65"] | 29.0<br>[1.14"] | 25.5<br>[1.00"] | 38.5<br>[1.52"] | 9                | 11             |
| 23           | H          | 23   | M34 x 1            | 42.0<br>[1.65"] | 38.0<br>[1.50"] | 17.0<br>[0.67"] | 30.0<br>[1.18"] | 27.0<br>[1.06"] | 40.0<br>[1.57"] | 10               | 11/12/13/15    |
| 25           | J          | 25   | M37 x 1            | 46.5<br>[1.83"] | 41.0<br>[1.61"] | 18.0<br>[0.71"] | 31.0<br>[1.22"] | 28.5<br>[1.12"] | 41.5<br>[1.63"] | 12               | 13/14/15/17/18 |

## PART NUMBERING

© 2008 Tyco Electronics. All rights reserved.

|                                                                                                                                                                                           |                        |                                                                                                                                                          |                               |                                                                                              |                       |                         |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|----------------------------------------------------------------------------------------------|-----------------------|-------------------------|--|
|  <b>Raychem</b><br>Wire and Harnessing Products<br>300 Constitution Drive<br>Menlo Park, CA 94025, USA |                        |                                                                                                                                                          |                               | <b>TITLE:</b><br><b>HEXASHIELD ADAPTOR FOR<br/>CODE 40 CONNECTORS<br/>PLAIN CLAMPING NUT</b> |                       |                         |  |
| UNLESS OTHERWISE SPECIFIED<br>DIMENSIONS ARE IN MILLIMETERS.<br>INCH DIMENSIONS ARE SHOWN IN<br>BRACKETS                                                                                  |                        | Tyco Electronics reserves the right to amend this drawing at<br>any time. Users should evaluate the suitability of the<br>product for their application. |                               | <b>DOCUMENT NO.</b><br><b>HEX40-KC-YY-YY-AYY-1-YY</b>                                        |                       |                         |  |
| <b>DRAWN:</b><br>IRT                                                                                                                                                                      | <b>DATE:</b><br>OCT 07 | <b>CAGE CODE:</b><br>06090                                                                                                                               | <b>DCR #</b><br>ECO-08-019355 | <b>FILE:</b><br>87002/40-KC-1                                                                | <b>SCALE:</b><br>NONE | <b>SHEET:</b><br>2 OF 4 |  |

If this document is printed it becomes uncontrolled. Check for the latest revision.

# CUSTOMER DRAWING

REV:  
A

DATE:  
Aug 21, 2008

HEX40 - K C - 00 - 21 - A9 - 1 - DS


- CONNECTOR CODE NUMBER  
HEX40 = MIL-C-38999 SERIES III AND IV
- MATERIAL CODE:  
K = STAINLESS STEEL
- PLATING CODE:  
C = ELECTROLESS NICKEL TO SAE-AMS-C-26074
- BODY STYLE  
00 = STRAIGHT  
45 = 45°  
90 = 90°
- ORDER NUMBER
- FERRULE QUANTITY CODE
- 1 = PLAIN CLAMPING NUT
- DS = DRILLED STAR - SEE NOTE 1

## APPLICATION

- These adaptors are designed to be mounted on the following connectors:

MIL-DTL-38999 Series III and IV

- They are qualified to the Raychem specification RB-114, when installed on metallic Mil-Specification circular connectors only.
- They are designed primarily for open wire bundle installation but are also designed to accept Raychem heat shrink moulded parts where strain relief is required – see illustration.

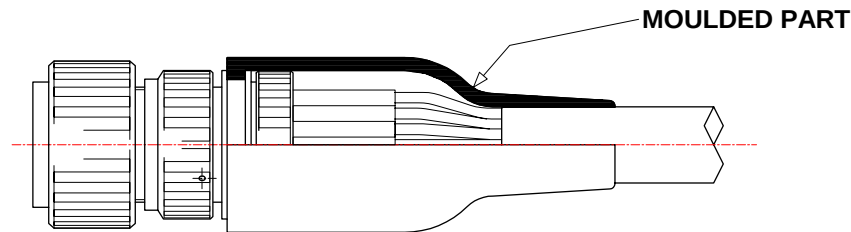

- Use in conjunction with ferrules HET-A-0XX, which are purchased separately. Refer to HET-A-0XX S.C.D. for relevant selection details.

## INSTALLATION

- See Installation Procedure RPIP-696-04 (straight bodies) or RPIP-696-07 (45° or 90° bodies) for assembly.
- See Installation Procedure RPIP-696-00 for cable termination.

## PACKAGING

© 2008 Tyco Electronics. All rights reserved.

|                                                                                                                                                                                              |                 |                                                                                       |                        |                        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------------------------------------------------------------------------------------|------------------------|------------------------|
| <br><b>Raychem</b><br>Wire and Harnessing Products<br>300 Constitution Drive<br>Menlo Park, CA 94025, USA |                 | TITLE:<br><b>HEXASHIELD ADAPTOR FOR<br/>CODE 40 CONNECTORS<br/>PLAIN CLAMPING NUT</b> |                        |                        |
| UNLESS OTHERWISE SPECIFIED<br>DIMENSIONS ARE IN MILLIMETERS.<br>INCH DIMENSIONS ARE SHOWN IN<br>BRACKETS                                                                                     |                 | DOCUMENT NO.<br><b>HEX40-KC-YY-YY-AYY-1-YY</b>                                        |                        |                        |
| DRAWN:<br>IRT                                                                                                                                                                                | DATE:<br>OCT 07 | CAGE CODE:<br>06090                                                                   | DCR #<br>ECO-08-019355 | FILE:<br>87002/40-KC-1 |
|                                                                                                                                                                                              |                 | SCALE:<br>NONE                                                                        |                        | SHEET:<br>3 OF 4       |

If this document is printed it becomes uncontrolled. Check for the latest revision.

# CUSTOMER DRAWING


REV:  
A

DATE:  
Aug 21, 2008

- All components are supplied in a plastic bag.

## NOTES!

- Item 4 - Star - is **not** supplied with Hexashield Order Number 09.
- The DS option, illustrated below, is for a Drilled Star that is available on sizes 15 to 25 only. This option is to allow unshielded wires to pass through the assembly.

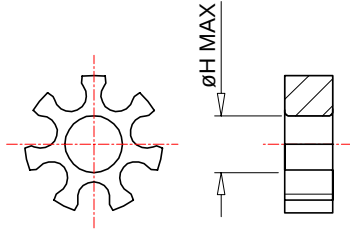


| STAR SIZE | 15             | 17             | 19             | 21              | 23              | 25              |
|-----------|----------------|----------------|----------------|-----------------|-----------------|-----------------|
| ØH MAX    | 3.0<br>[0.12"] | 6.0<br>[0.24"] | 9.0<br>[0.35"] | 12.0<br>[0.47"] | 15.0<br>[0.59"] | 18.0<br>[0.71"] |

- Where the ferrule quantities required are standard, the item 4 - Star - is also standard.  
If the optional quantity is selected then 2 items 4 will be supplied - one "split" and the other one standard.  
See below for illustration. Note: Star combination may vary from Order Number to Order Number.

EXAMPLE: FERRULE QUANTITY CODE -A13

-A13 = -A10 SPLIT STAR + -A3 STANDARD STAR



- Assembly is to be permanently marked with Code Identity Number and Part Number.  
(e.g. 06090 HEX40-KC-00-21-A9-1)

© 2008 Tyco Electronics. All rights reserved.

|                                                                                                                                                                                              |                 |                     |                                                                                       |                        |                  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------------------|---------------------------------------------------------------------------------------|------------------------|------------------|
| <br><b>Raychem</b><br>Wire and Harnessing Products<br>300 Constitution Drive<br>Menlo Park, CA 94025, USA |                 |                     | TITLE:<br><b>HEXASHIELD ADAPTOR FOR<br/>CODE 40 CONNECTORS<br/>PLAIN CLAMPING NUT</b> |                        |                  |
| UNLESS OTHERWISE SPECIFIED<br>DIMENSIONS ARE IN MILLIMETERS.<br>INCH DIMENSIONS ARE SHOWN IN<br>BRACKETS                                                                                     |                 |                     | DOCUMENT NO.<br><b>HEX40-KC-YY-YY-AYY-1-YY</b>                                        |                        |                  |
| DRAWN:<br>IRT                                                                                                                                                                                | DATE:<br>OCT 07 | CAGE CODE:<br>06090 | DCR #<br>ECO-08-019355                                                                | FILE:<br>87002/40-KC-1 | SHEET:<br>4 OF 4 |

If this document is printed it becomes uncontrolled. Check for the latest revision.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331