



K4001A3C

REV.
A

REVISIONS		RELEASED	
REV.	DESCRIPTION	DATE	APPROVED
A	RELEASE TO PRODUCTION	11-08-18	C.B.

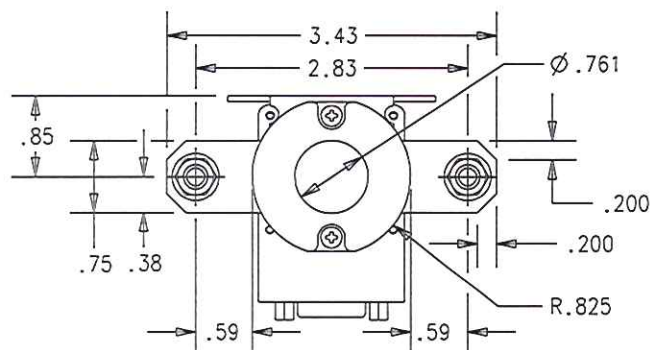

CONSTRUCTION
MAIN CONTACTS
CONFIGURATION
VOLTAGE
CURRENT
RESISTIVE
OVERLOAD
INRUSH
RUPTURE

GASKET SEALED
SPST N.O. (DOUBLE BREAK)
28 VDC
400 AMPS
450 AMPS FOR 5 MIN
1000 AMPS FOR 10 SEC.
1500 AMPS
4000 AMPS

AUXILIARY CONTACTS
CONFIGURATION
VOLTAGE
CURRENT
RESISTIVE
INDUCTIVE
LAMP
LOW LEVEL

2 FORM C
28 VDC
5 AMPS
2 AMPS
1 AMP
1 mA AT 28 VDC

COIL DATA
DUTY CYCLE
MAX OPERATE VOLTAGE
NOM OPERATE VOLTAGE
MAX PICKUP VOLTAGE
DROPOUT VOLTAGE
COIL CURRENT
INRUSH
HOLD
OPERATE TIME
RELEASE TIME
BOUNCE TIME



CONTINUOUS (ECONOMIZED)
32 VDC
28 VDC
13 VDC AT 20°C (FIRST APPLICATION)
16 VDC AT 85°C
9 VDC MAX
6 AMP MAX AT 32 VDC AND -40°C
500 mA MAX AT 32 VDC AND 25°C
35 mSEC MAX AT 18 TO 32 VDC
20 mSEC MAX AT 28 VDC
5 mSEC MAX AT 18 TO 32 VDC

ENVIRONMENTAL DATA
TEMPERATURE
ALTITUDE

-55°C TO 85°C
50,000 FEET


LIFE ELECTRICAL
LIFE MECHANICAL
WEIGHT MAX EST.

50,000 CYCLES MIN.
100,000 CYCLES MIN.
.77 LBS

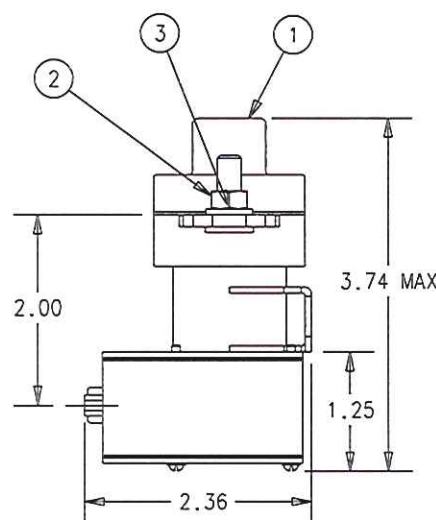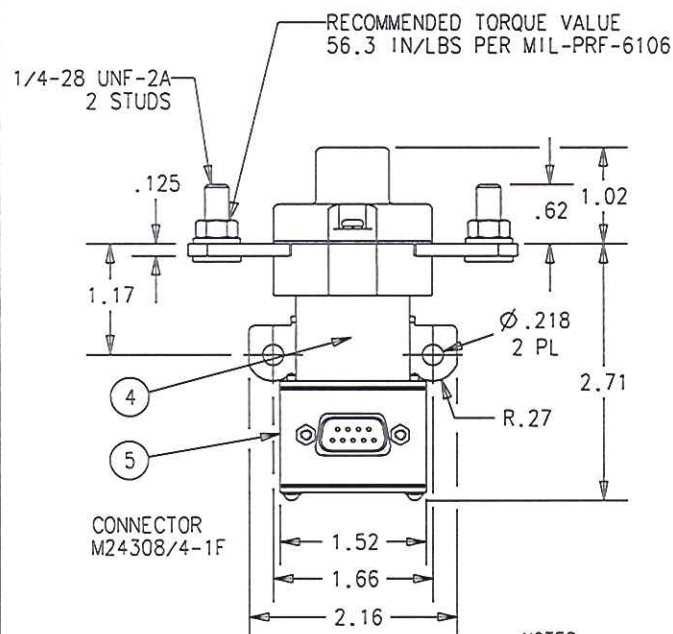

NOTES:

1. COIL TRANSIENT VOLTAGE LIMITED TO ± 42 VOLTS REFERENCED TO ZERO VOLTS.
2. AUXILIARY CONTACTS ARE GOLD PLATED.
3. 1 MILLIAMPERE RATING DOES NOT APPLY IF CONTACTS HAVE SWITCHED LOADS ABOVE 1 MILLIAMPERE.



5	1	44900-015	SCHEMATIC DIAGRAM				9-1616970-4
4	1	44899-026	NAME PLATE				9-1616970-3
3	2	51807-034	LOCKWASHER, 1/4 SPLIT				3-1616360-0
2	2	50407-074	NUT 1/4-28 3/8 X 3/16 HEX				9-1616337-0
1	1	47619-080	PRIMARY ASSEMBLY				7-1616968-5
FIND NO	QTY REQD	PART OR IDENTIFYING NO	NOMENCLATURE OR DESCRIPTION	DRAWING OR SPECIFICATION	FSC# NO	TE PART NO	MATERIAL OR NOTE
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON			 Hartman Division 175 N. DIAMOND STREET MANSFIELD, OHIO 44902 CONTACTOR - SPST N.O. DB 400 AMP, 28 VDC  DWG NO. K4001A3C REF TE PN 6-1616968-5				
2 PL DEC.	3 PL DEC.	ANGLES					
± .06	± .010	± 1°					
			DR BY	RSS	06-06-23		
			CHK BY	C.B.	11-08-18		
			ENGR	RSS	06-06-23		
			MFG	S&W	01-03-18		
			SIZE	A	CODE IDENT		
					74063		
			SCALE 1:2	SHEET 1 OF 1			



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331