

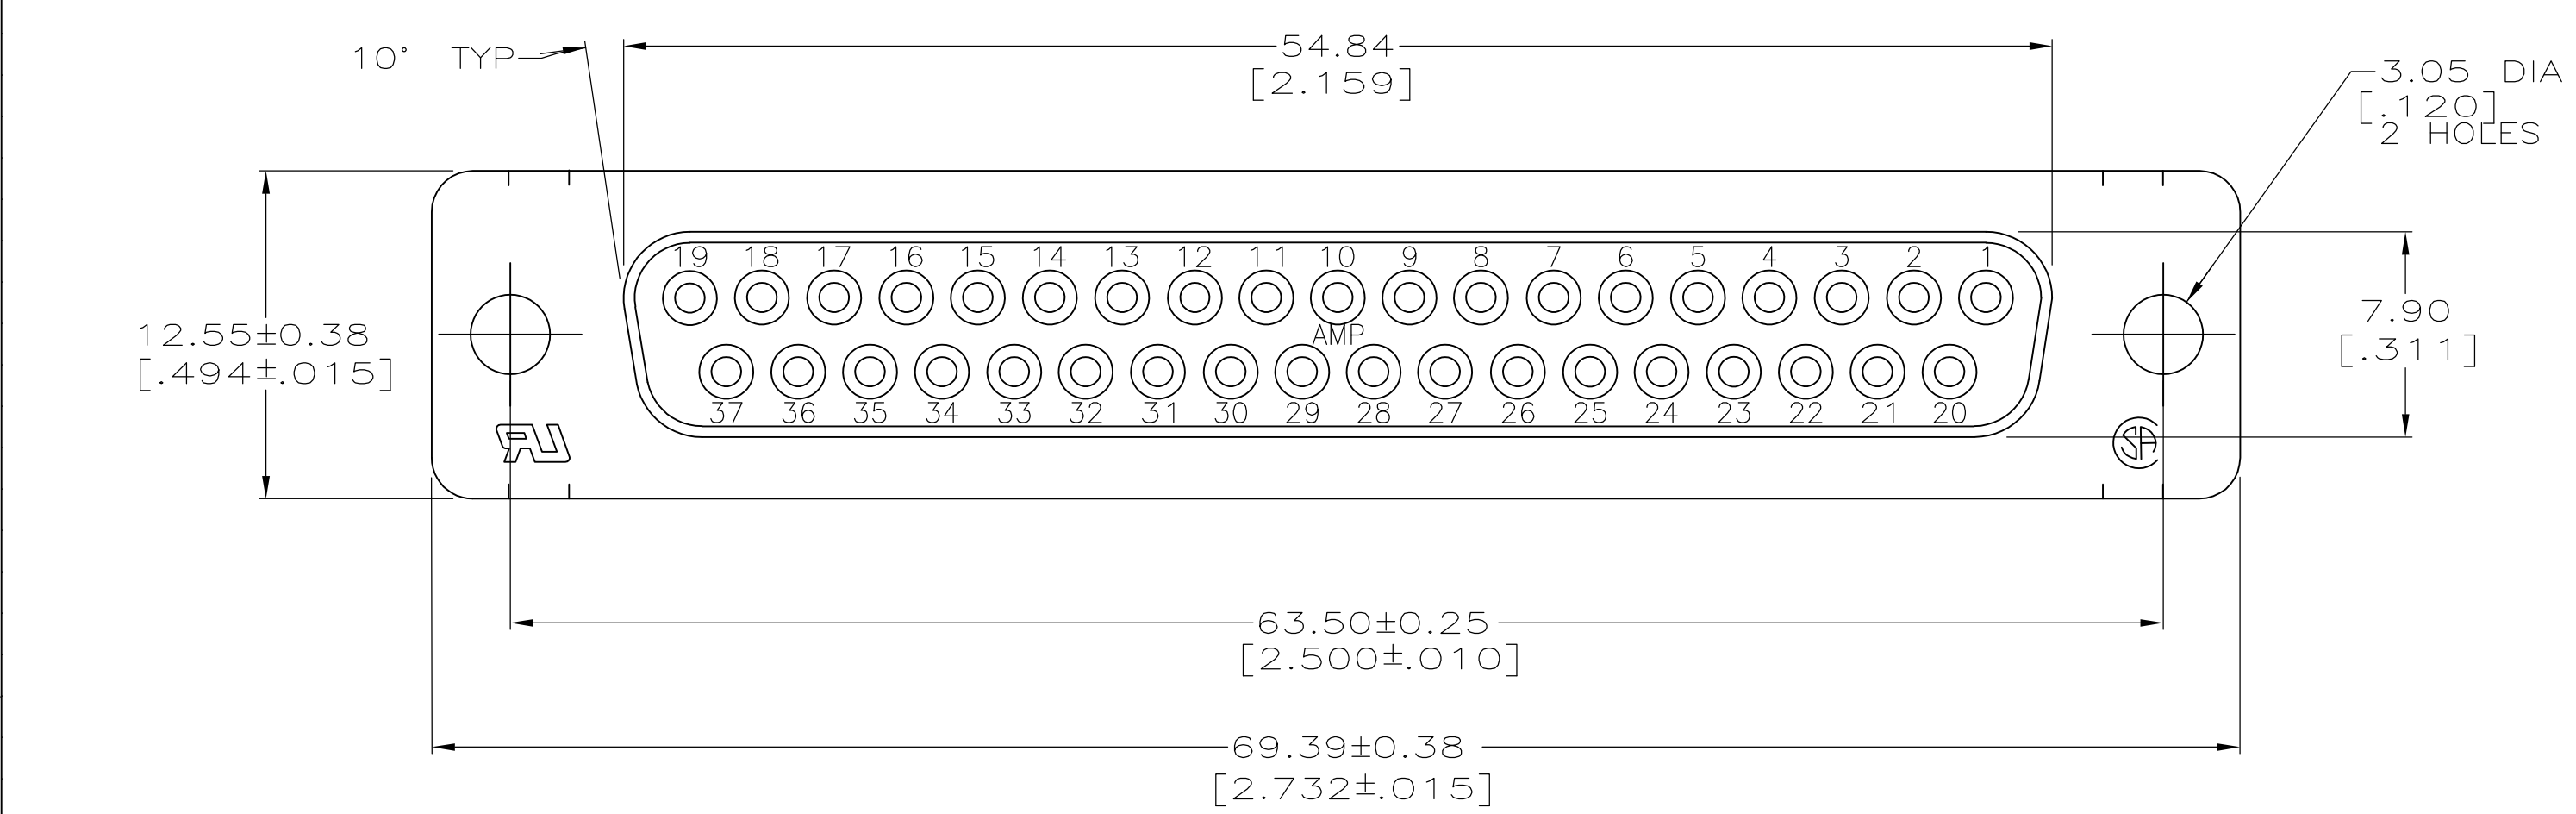
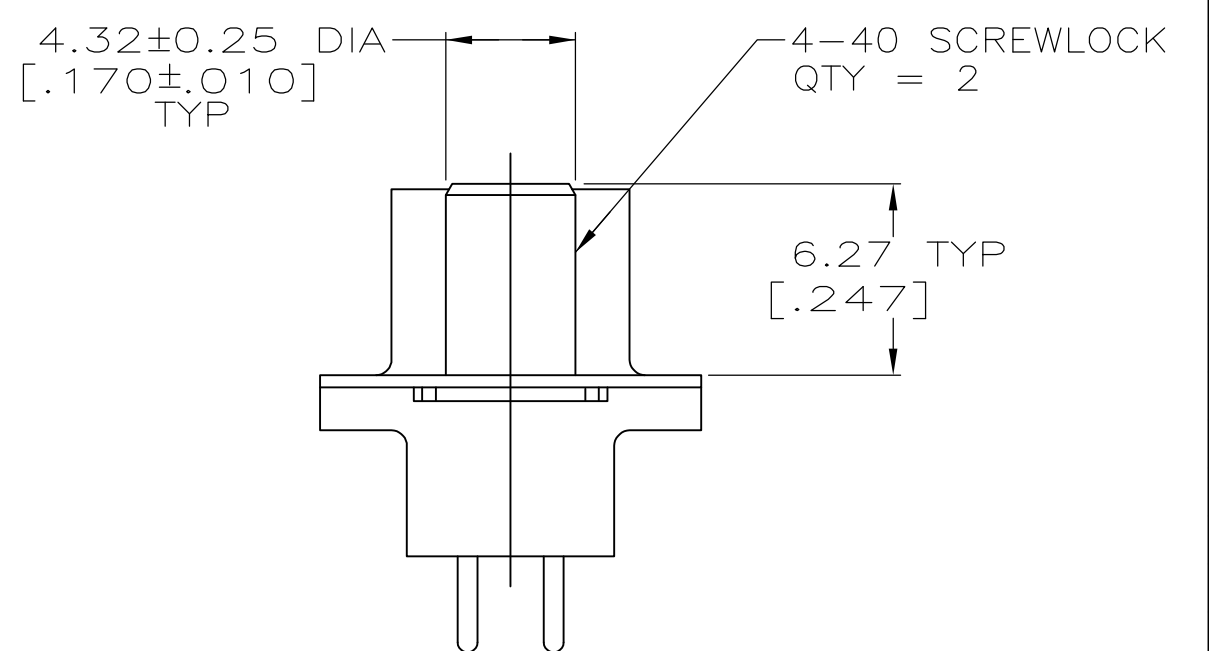
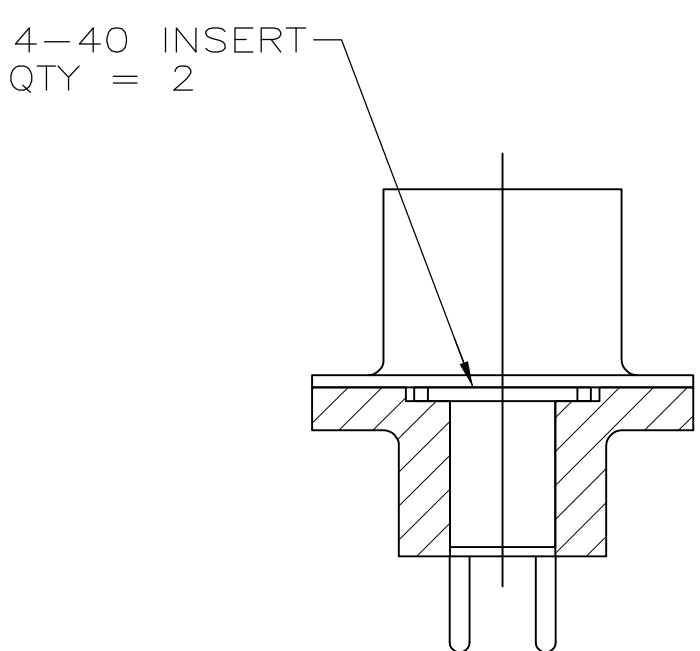


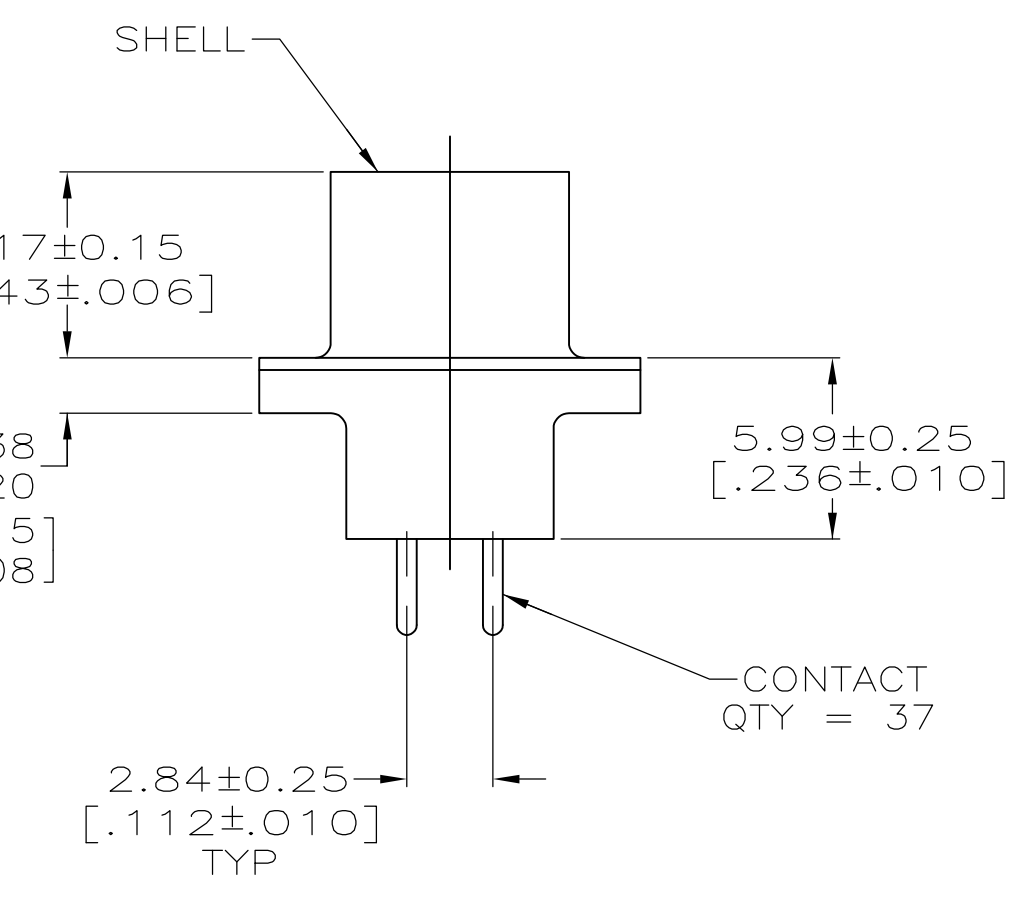


- 1 HOUSING: BLACK POLYESTER, UL 94V-0 RATED; CONTACT: PHOSPHOR BRONZE
SHELL: CARBON STEEL; SCREWLOCK: ZINC; INSERT: BRASS.
- 2 NOTE DELETED.
- 3 GOLD FLASH FOR A LENGTH OF 2.54[.100] MIN FROM MATING END,
2.54μm[.000100] MIN TIN OR TIN-LEAD FOR A LENGTH OF DIMENSION A FROM
OPPOSITE END, BOTH OVER 1.27μm[.000050] MIN NICKEL.
- 4 0.76μm[.000030] MIN GOLD FOR A LENGTH OF 2.54[.100] MIN FROM MATING END,
2.54μm[.000100] MIN TIN OR TIN-LEAD FOR A LENGTH OF DIMENSION A FROM
OPPOSITE END, BOTH OVER 1.27μm[.000050] MIN NICKEL.
- 5 5.08μm[.000200] MIN TIN OVER 2.54μm[.000100] MIN COPPER.
- 6 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMERS.
- 7 2.79[.110] MAX IN SHELL TAB CLINCH AREAS.

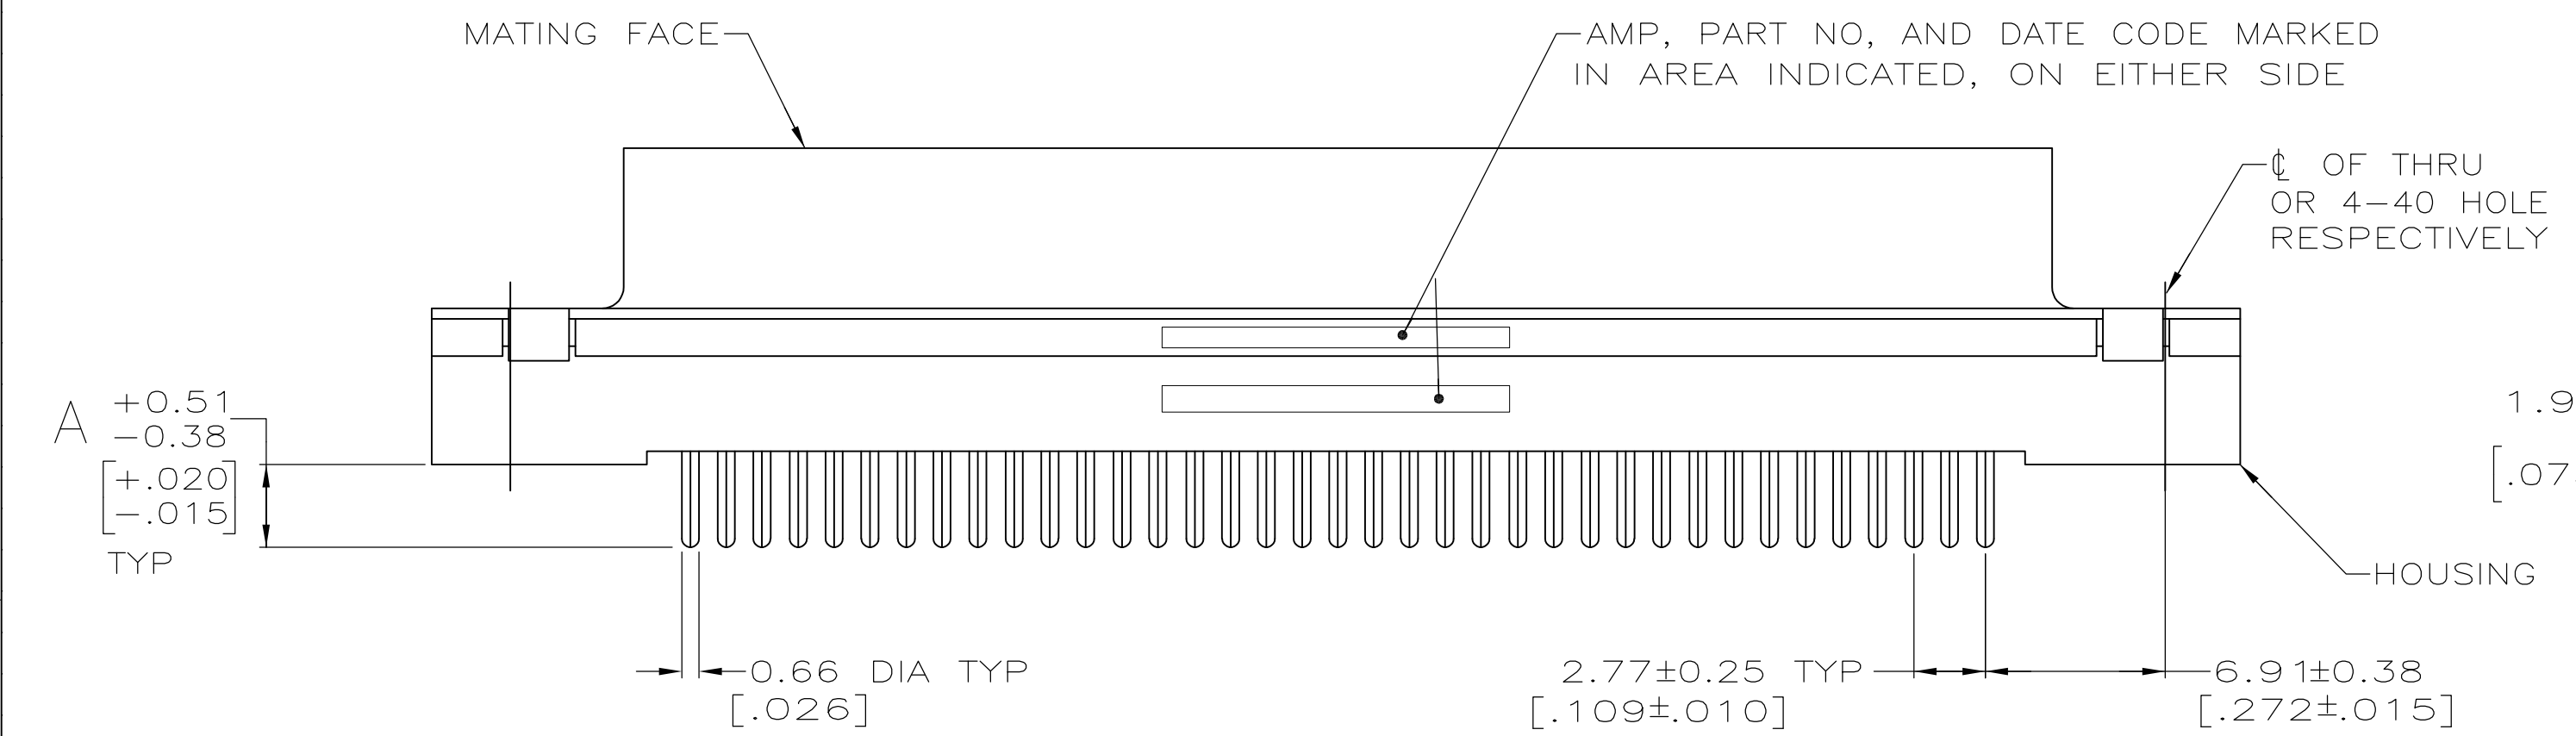

DETAIL D

DETAIL E

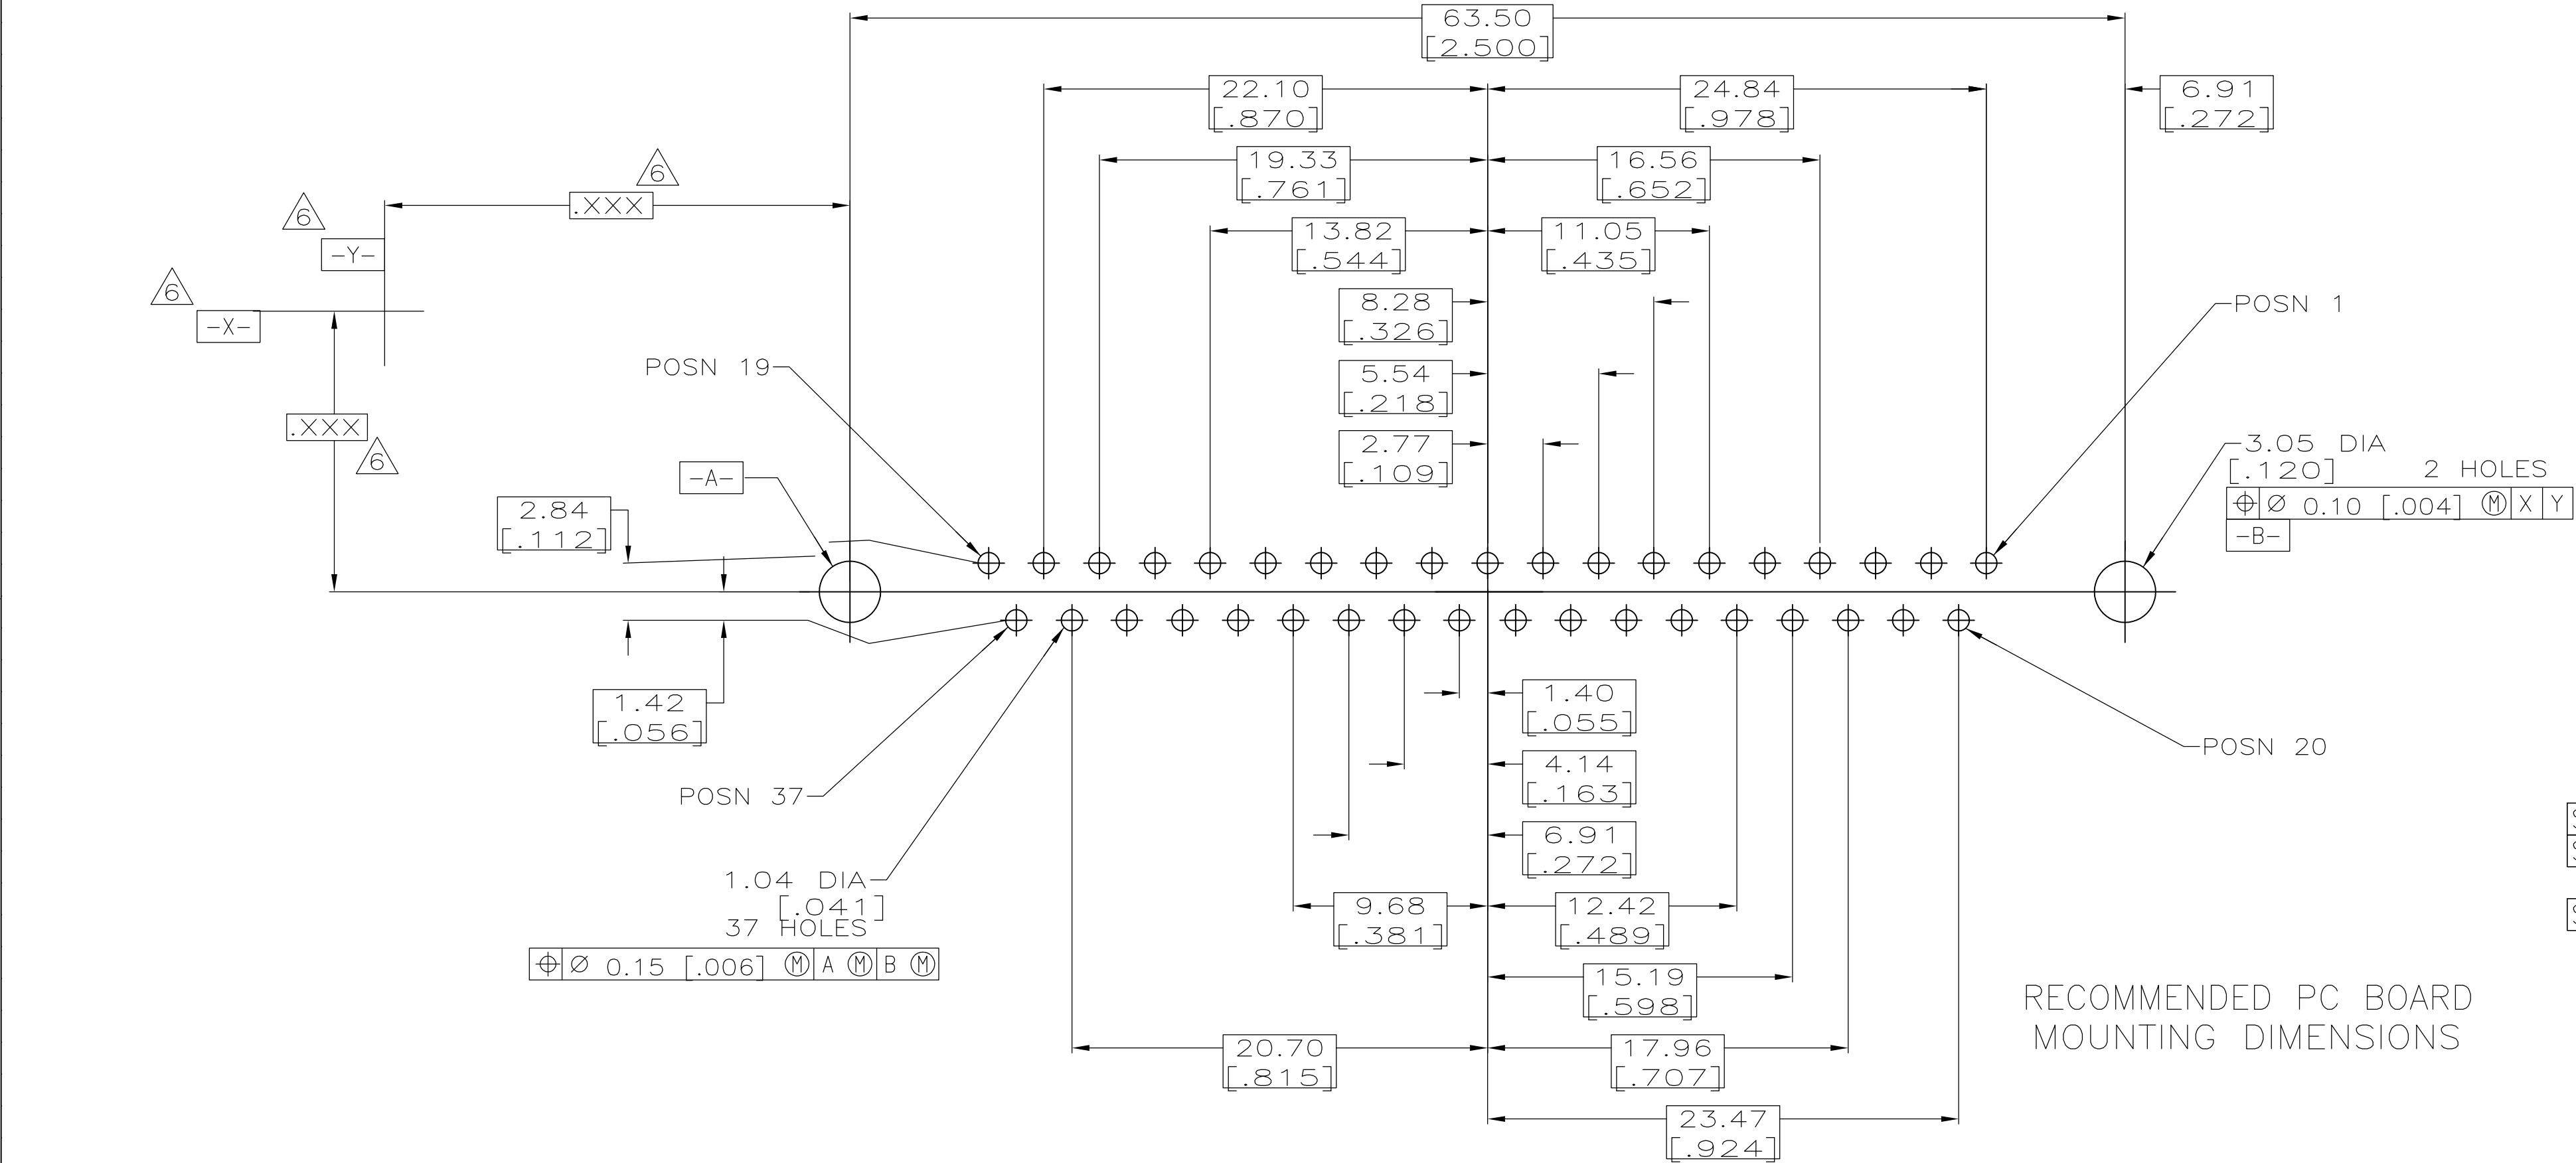

RECOMMENDED PC BOARD
MOUNTING DIMENSIONS

OBSOLETE	6.35 [.250]	4-40 SCREWLOCK (DETAIL E)	1	1-747301-8
OBSOLETE	6.35 [.250]	4-40 SCREWLOCK (DETAIL E)	3	1-747301-7
	4.32 [.170]	4-40 SCREWLOCK (DETAIL E)	4	1-747301-6
OBSOLETE	4.32 [.170]	4-40 SCREWLOCK (DETAIL E)	3	1-747301-5
	3.18 [.125]	4-40 SCREWLOCK (DETAIL E)	4	1-747301-4
OBSOLETE	3.18 [.125]	4-40 SCREWLOCK (DETAIL E)	3	1-747301-3
OBSOLETE	6.35 [.250]	4-40 INSERT (DETAIL D)	4	1-747301-2
OBSOLETE	6.35 [.250]	4-40 INSERT (DETAIL D)	3	1-747301-1
OBSOLETE	4.32 [.170]	4-40 INSERT (DETAIL D)	4	1-747301-0
OBSOLETE	4.32 [.170]	4-40 INSERT (DETAIL D)	3	747301-9
	3.18 [.125]	4-40 INSERT (DETAIL D)	4	747301-8
	3.18 [.125]	4-40 INSERT (DETAIL D)	3	747301-7
OBSOLETE	6.35 [.250]	-	4	747301-6
OBSOLETE	6.35 [.250]	-	3	747301-5
SUPERSEDED BY 747301-2	4.32 [.170]	-	4	747301-4
SUPERSEDED BY 747301-4	4.32 [.170]	-	3	747301-3
	3.18 [.125]	-	4	747301-2
SUPERSEDED BY 747301-2	3.18 [.125]	-	3	747301-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± 0.13 [.005]

3 PLC ± -

4 PLC ± -

ANGLES ± -

MATERIAL

SEE TABLE

DWN J. McCLINTON

CHK R. STONE

REV C. ROHDE

PRODUCT SPEC

APPLICATION SPEC

114-40023

WEIGHT

108-40025

SIZE

CAGE CODE

DRAWING NO

00779

747301

CUSTOMER DRAWING

SCALE

4:1

SHEET

1

OF

1

REV

L

Tyco Electronics Corporation

Harrisburg, PA 17105-3608

RECEPTACLE ASSEMBLY, SIZE 4, 37 POSN, VERTICAL, FRONT METAL SHELL, AMPLITE HD-20

RESTRICTED TO



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331