

Terminal Part Number: 02977131  
Surface Plating: SN  
Material Thickness [mm]: 1,02  
Cross Section [mm²]: 3,00

*This document is non-contractual  
and for information only.*



*For more information, please  
consult your local sales office*

Cable Type codes: 1005  
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
Insulation Range Φ[mm]: 3,00 - 3,25  
Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|-------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 1005 3,00         |             | 3,13                        | 250                   | 3,20        | 0,05               | 5,15        | 0,10               | 4,80        | 0,10               | 6,70        | 0,20               |

Cable type code legend:

1005:  
Industry Designator: SAE  
Conductor Material: COPPER  
Conductor Plating: NONE  
Insul. Material: PVC, PVDF, XLPE  
Insul. Wall Designator: THIN

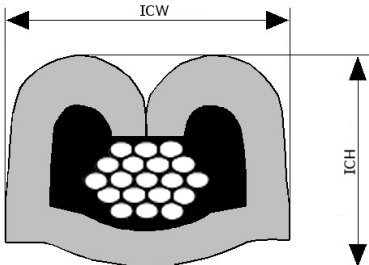

Terminal Part Number: 02977131

Surface Plating: SN

Material Thickness [mm]: 1,02

Cross Section [mm²]: 3,00 | 5,00

This document is non-contractual  
and for information only.

For more information, please  
consult your local sales office

Cable Type codes: 1005

Crimp Process: (D) DIP SOLDER - TERMINAL IS CRIMPED ON BARE CORE

Insulation Range Φ[mm]: 3,00 - 4,07

Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|-------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 1005 3,00         |             | 3,13                        | 250                   | 3,20        | 0,05               | 5,15        | 0,10               | 4,80        | 0,10               | 6,70        | 0,20               |
| 1005 5,00         |             | 3,89                        | 300                   | 3,50        | 0,05               | 5,25        | 0,10               | 5,10        | 0,10               | 6,80        | 0,20               |

Cable type code legend:

1005:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, PVDF, XLPE

Insul. Wall Designator: THIN

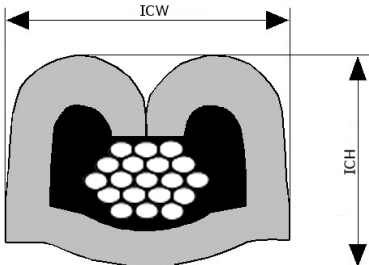

Terminal Part Number: 02977131

Surface Plating: SN

Material Thickness [mm]: 1,02

Cross Section [mm²]: 5,00

*This document is non-contractual  
and for information only.*

*For more information, please  
consult your local sales office*

Cable Type codes: 1005

Crimp Process: (S) SOLDER - CRIMP AND SWEAT - CORE IS DIP SOLDERED

Insulation Range Φ[mm]: 3,70 - 4,07

Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|-------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 1005 5,00         |             | 3,89                        | 300                   | 3,50        | 0,05               | 5,25        | 0,10               | 5,10        | 0,10               | 6,80        | 0,20               |

Cable type code legend:

1005:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, PVDF, XLPE

Insul. Wall Designator: THIN

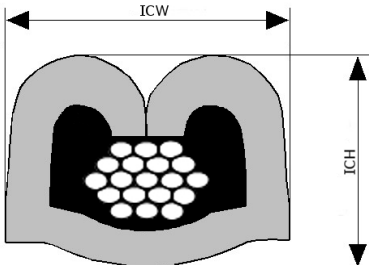

Terminal Part Number: 02977131

Surface Plating: SN

Material Thickness [mm]: 1,02

Cross Section [mm²]: 0,80 | 1,00

This document is non-contractual  
and for information only.

For more information, please  
consult your local sales office

Cable Type codes: 1005 + 1005

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Seal(s): NONE

| Cable type / seal     | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|-----------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 1005 0,80 + 1005 1,00 |             | 2,03 + 2,23                 | 90                    | 2,85        | 0,05               | 5,80        | 0,10               | 4,30        | 0,10               | 7,10        | 0,20               |

Cable type code legend:

1005:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, PVDF, XLPE

Insul. Wall Designator: THIN

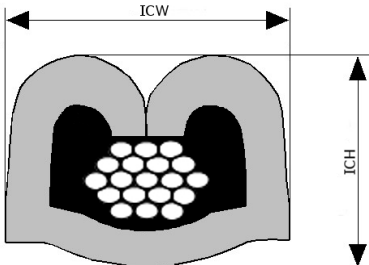

Terminal Part Number: 02977131

Surface Plating: SN

Material Thickness [mm]: 1,02

Cross Section [mm²]: 0,80 | 1,00

This document is non-contractual  
and for information only.

For more information, please  
consult your local sales office

Cable Type codes: 1005 + 1005

Crimp Process: (D) DIP SOLDER - TERMINAL IS CRIMPED ON BARE CORE

Seal(s): NONE

| Cable type / seal     | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|-----------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 1005 0,80 + 1005 1,00 |             | 2,03 + 2,23                 | 90                    | 2,85        | 0,05               | 5,80        | 0,10               | 4,30        | 0,10               | 7,10        | 0,20               |

Cable type code legend:

1005:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, PVDF, XLPE

Insul. Wall Designator: THIN

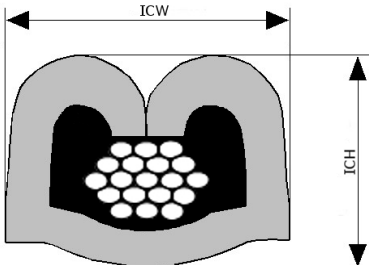

Terminal Part Number: 02977131

Surface Plating: SN

Material Thickness [mm]: 1,02

Cross Section [mm²]: 3,00

Cable Type codes: 1007

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 3,45 - 3,81

Seal(s): NONE

This document is non-contractual  
and for information only.

For more information, please  
consult your local sales office

| Cable type / seal | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|-------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 1007 3,00         |             | 3,63                        | 250                   | 3,20        | 0,05               | 5,15        | 0,10               | 4,80        | 0,10               | 6,70        | 0,20               |

Cable type code legend:

1007:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPA/PVDF, XLPE

Insul. Wall Designator: REGULAR

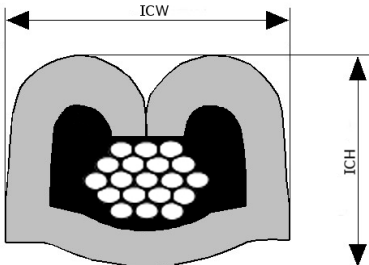

Terminal Part Number: 02977131

Surface Plating: SN

Material Thickness [mm]: 1,02

Cross Section [mm²]: 3,00 | 5,00

This document is non-contractual  
and for information only.

For more information, please  
consult your local sales office

Cable Type codes: 1007

Crimp Process: (D) DIP SOLDER - TERMINAL IS CRIMPED ON BARE CORE

Insulation Range Φ[mm]: 3,45 - 4,70

Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|-------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 1007 3,00         |             | 3,63                        | 250                   | 3,20        | 0,05               | 5,15        | 0,10               | 4,80        | 0,10               | 6,70        | 0,20               |
| 1007 5,00         |             | 4,45                        | 300                   | 3,50        | 0,05               | 5,25        | 0,10               | 5,70        | 0,10               | 7,20        | 0,20               |

Cable type code legend:

1007:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPA/PVDF, XLPE

Insul. Wall Designator: REGULAR

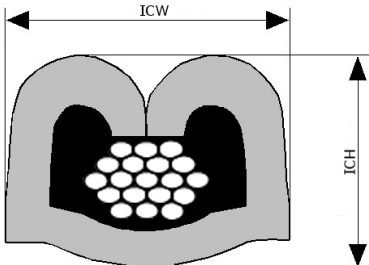

Terminal Part Number: 02977131

Surface Plating: SN

Material Thickness [mm]: 1,02

Cross Section [mm²]: 5,00

*This document is non-contractual  
and for information only.*

*For more information, please  
consult your local sales office*

Cable Type codes: 1007

Crimp Process: (S) SOLDER - CRIMP AND SWEAT - CORE IS DIP SOLDERED

Insulation Range Φ[mm]: 4,20 - 4,70

Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|-------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 1007 5,00         |             | 4,45                        | 300                   | 3,50        | 0,05               | 5,25        | 0,10               | 5,70        | 0,10               | 7,20        | 0,20               |

Cable type code legend:

1007:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPA/PVDF, XLPE

Insul. Wall Designator: REGULAR

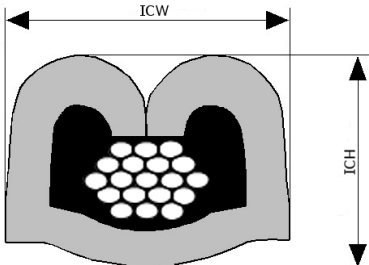



Terminal Part Number: 02977131

Surface Plating: SN

Material Thickness [mm]: 1,02

Cross Section [mm²]: 0,80 | 1,00

This document is non-contractual  
and for information only.

For more information, please  
consult your local sales office

Cable Type codes: 1007 + 1007

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Seal(s): NONE

| Cable type / seal     | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|-----------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 1007 0,80 + 1007 0,80 |             | 2,33 + 2,33                 | 90                    | 2,80        | 0,05               | 5,80        | 0,10               | 4,30        | 0,10               | 7,00        | 0,20               |
| 1007 0,80 + 1007 1,00 |             | 2,33 + 2,58                 | 90                    | 2,85        | 0,05               | 5,80        | 0,10               | 4,30        | 0,10               | 7,10        | 0,20               |

Cable type code legend:

1007:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPA/PVDF, XLPE

Insul. Wall Designator: REGULAR

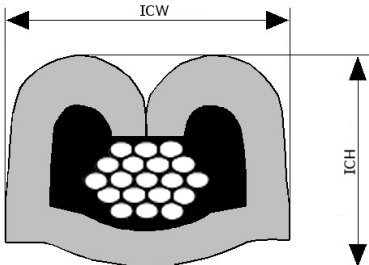

Terminal Part Number: 02977131

Surface Plating: SN

Material Thickness [mm]: 1,02

Cross Section [mm²]: 0,80 | 1,00 | 2,00

*This document is non-contractual  
and for information only.*

*For more information, please  
consult your local sales office*

Cable Type codes: 1007 + 1007

Crimp Process: (D) DIP SOLDER - TERMINAL IS CRIMPED ON BARE CORE

Seal(s): NONE

| Cable type / seal     | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|-----------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 1007 0,80 + 1007 0,80 |             | 2,33 + 2,33                 | 90                    | 2,80        | 0,05               | 5,80        | 0,10               | 4,30        | 0,10               | 7,00        | 0,20               |
| 1007 0,80 + 1007 1,00 |             | 2,33 + 2,58                 | 90                    | 2,85        | 0,05               | 5,80        | 0,10               | 4,30        | 0,10               | 7,10        | 0,20               |
| 1007 1,00 + 1007 1,00 |             | 2,58 + 2,58                 | 120                   | 2,95        | 0,05               | 5,80        | 0,10               | 4,70        | 0,10               | 7,70        | 0,20               |
| 1007 2,00 + 1007 2,00 |             | 2,98 + 2,98                 | 200                   | 3,15        | 0,05               | 5,85        | 0,10               | 4,90        | 0,10               | 7,50        | 0,20               |

Cable type code legend:

1007:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPA/PVDF, XLPE

Insul. Wall Designator: REGULAR

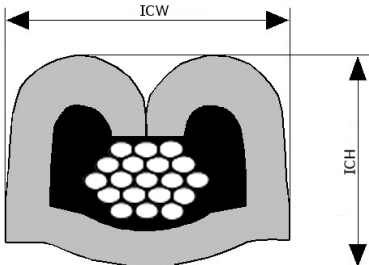

Terminal Part Number: 02977131

Surface Plating: SN

Material Thickness [mm]: 1,02

Cross Section [mm²]: 1,00

Cable Type codes: 1007 + 1007

Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD

Seal(s): NONE

This document is non-contractual  
and for information only.

For more information, please  
consult your local sales office

| Cable type / seal     | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|-----------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 1007 1,00 + 1007 1,00 |             | 2,58 + 2,58                 | 120                   | 2,95        | 0,05               | 5,80        | 0,10               | 4,70        | 0,10               | 7,70        | 0,20               |

Cable type code legend:

1007:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPA/PVDF, XLPE

Insul. Wall Designator: REGULAR

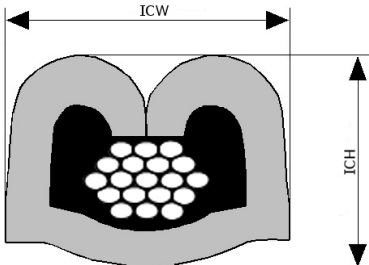

Terminal Part Number: 02977131

Surface Plating: SN

Material Thickness [mm]: 1,02

Cross Section [mm<sup>2</sup>]: 1,00 | 3,00

Cable Type codes: 1007 + 1009

Crimp Process: (D) DIP SOLDER - TERMINAL IS CRIMPED ON BARE CORE

Seal(s): NONE

This document is non-contractual  
and for information only.

For more information, please  
consult your local sales office

| Cable type / seal     | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|-----------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 1007 1,00 + 1009 3,00 |             | 2,58 + 4,13                 | 120                   | 3,20        | 0,05               | 5,80        | 0,10               | 5,00        | 0,10               | 8,80        | 0,20               |

Cable type code legend:

1007:

Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPA/PVDF, XLPE

Insul. Wall Designator: REGULAR

1009:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPE

Insul. Wall Designator: SPECIAL

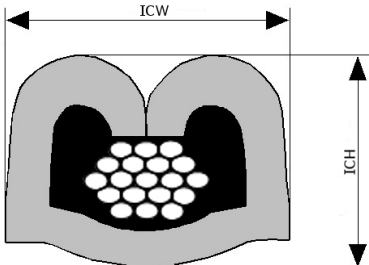

Terminal Part Number: 02977131

Surface Plating: SN

Material Thickness [mm]: 1,02

Cross Section [mm²]: 3,00

*This document is non-contractual  
and for information only.*

*For more information, please  
consult your local sales office*

Cable Type codes: 1009

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 4,00 - 4,25

Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|-------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 1009 3,00         |             | 4,13                        | 250                   | 3,20        | 0,05               | 5,15        | 0,10               | 4,80        | 0,10               | 6,70        | 0,20               |

Cable type code legend:

1009:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPE

Insul. Wall Designator: SPECIAL

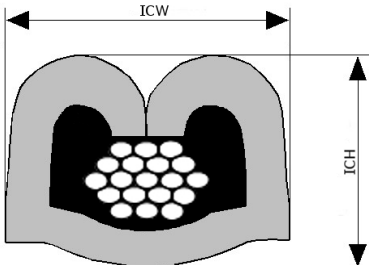

Terminal Part Number: 02977131  
Surface Plating: SN  
Material Thickness [mm]: 1,02  
Cross Section [mm²]: 3,00 | 5,00

This document is non-contractual  
and for information only.

For more information, please  
consult your local sales office



Cable Type codes: 1009  
Crimp Process: (D) DIP SOLDER - TERMINAL IS CRIMPED ON BARE CORE  
Insulation Range Φ[mm]: 4,00 - 5,33  
Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|-------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 1009 3,00         |             | 4,13                        | 250                   | 3,20        | 0,05               | 5,15        | 0,10               | 4,80        | 0,10               | 6,70        | 0,20               |
| 1009 5,00         |             | 5,07                        | 300                   | 3,50        | 0,05               | 5,25        | 0,10               | 5,70        | 0,10               | 7,20        | 0,20               |

Cable type code legend:

1009:

Industry Designator: SAE  
Conductor Material: COPPER  
Conductor Plating: NONE  
Insul. Material: PVC, XLPE  
Insul. Wall Designator: SPECIAL

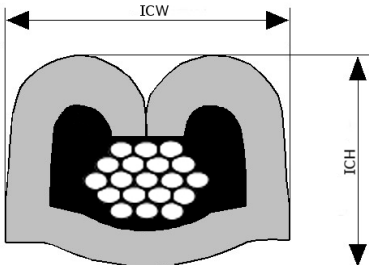

Terminal Part Number: 02977131  
Surface Plating: SN  
Material Thickness [mm]: 1,02  
Cross Section [mm²]: 5,00

*This document is non-contractual  
and for information only.*

*For more information, please  
consult your local sales office*



Cable Type codes: 1009  
Crimp Process: (S) SOLDER - CRIMP AND SWEAT - CORE IS DIP SOLDERED  
Insulation Range Φ[mm]: 4,80 - 5,33  
Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|-------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 1009 5,00         |             | 5,07                        | 300                   | 3,50        | 0,05               | 5,25        | 0,10               | 5,70        | 0,10               | 7,20        | 0,20               |

Cable type code legend:

1009:

Industry Designator: SAE  
Conductor Material: COPPER  
Conductor Plating: NONE  
Insul. Material: PVC, XLPE  
Insul. Wall Designator: SPECIAL

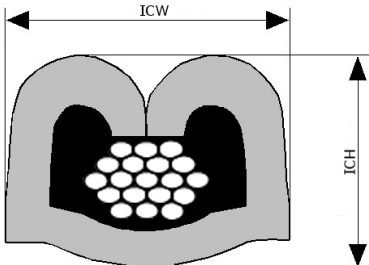

Terminal Part Number: 02977131

Surface Plating: SN

Material Thickness [mm]: 1,02

Cross Section [mm²]: 1,00 | 2,00 | 3,00

This document is non-contractual  
and for information only.

For more information, please  
consult your local sales office

Cable Type codes: 1009 + 1009

Crimp Process: (D) DIP SOLDER - TERMINAL IS CRIMPED ON BARE CORE

Seal(s): NONE

| Cable type / seal     | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|-----------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 1009 1,00 + 1009 1,00 |             | 3,17 + 3,17                 | 120                   | 2,95        | 0,05               | 5,80        | 0,10               | 4,70        | 0,10               | 7,70        | 0,20               |
| 1009 1,00 + 1009 3,00 |             | 3,17 + 4,13                 | 120                   | 3,20        | 0,05               | 5,80        | 0,10               | 5,00        | 0,10               | 8,60        | 0,20               |
| 1009 2,00 + 1009 2,00 |             | 3,73 + 3,73                 | 200                   | 3,15        | 0,05               | 5,85        | 0,10               | 4,90        | 0,10               | 7,50        | 0,20               |

Cable type code legend:

1009:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPE

Insul. Wall Designator: SPECIAL

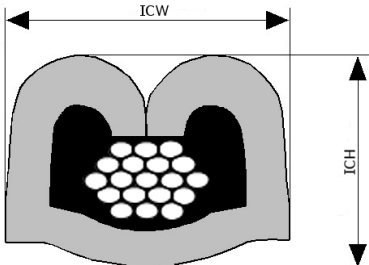



Terminal Part Number: 02977131

Surface Plating: SN

Material Thickness [mm]: 1,02

Cross Section [mm<sup>2</sup>]: 2,00

Cable Type codes: 1009 + 1009

Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD

Seal(s): NONE

This document is non-contractual  
and for information only.

For more information, please  
consult your local sales office

| Cable type / seal     | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|-----------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 1009 2,00 + 1009 2,00 |             | 3,73 + 3,73                 | 200                   | 3,15        | 0,05               | 5,85        | 0,10               | 4,90        | 0,10               | 7,50        | 0,20               |

Cable type code legend:

1009:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPE

Insul. Wall Designator: SPECIAL

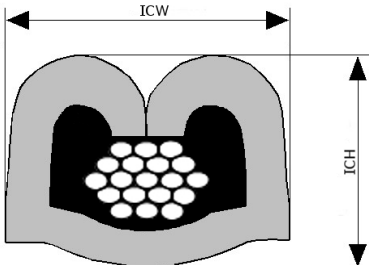

Terminal Part Number: 02977131  
Surface Plating: SN  
Material Thickness [mm]: 1,02  
Cross Section [mm²]: 2,00

*This document is non-contractual  
and for information only.*

*For more information, please  
consult your local sales office*



Cable Type codes: 1009 + 1009  
Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED  
Seal(s): NONE

| Cable type / seal     | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|-----------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 1009 2,00 + 1009 2,00 |             | 3,73 + 3,73                 | 200                   | 3,15        | 0,05               | 5,85        | 0,10               | 4,90        | 0,10               | 7,50        | 0,20               |

Cable type code legend:

1009:

Industry Designator: SAE  
Conductor Material: COPPER  
Conductor Plating: NONE  
Insul. Material: PVC, XLPE  
Insul. Wall Designator: SPECIAL

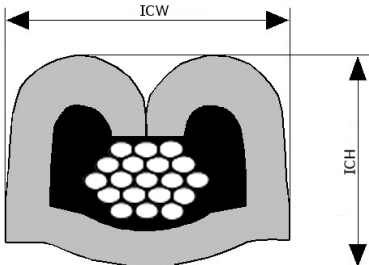

Terminal Part Number: 02977131  
Surface Plating: SN  
Material Thickness [mm]: 1,02  
Cross Section [mm²]: 3,00

*This document is non-contractual  
and for information only.*

*For more information, please  
consult your local sales office*



Cable Type codes: 1011  
Crimp Process: (D) DIP SOLDER - TERMINAL IS CRIMPED ON BARE CORE  
Insulation Range Φ[mm]: 4,50 - 4,70  
Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|-------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 1011 3,00         |             | 4,60                        | 250                   | 3,20        | 0,05               | 5,15        | 0,10               | 5,40        | 0,10               | 7,10        | 0,20               |

Cable type code legend:

1011:

Industry Designator: SAE  
Conductor Material: COPPER  
Conductor Plating: NONE  
Insul. Material: EAE, POLYOLEFIN, PVC, TPE, XLPE  
Insul. Wall Designator: HEAVY DUTY

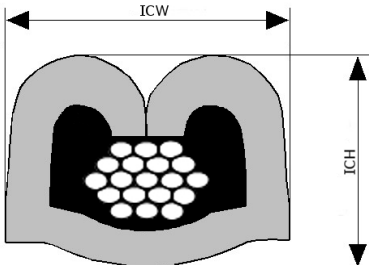

Terminal Part Number: 02977131

Surface Plating: SN

Material Thickness [mm]: 1,02

Cross Section [mm²]: 0,50 | 3,00

Cable Type codes: 1011 + 1007

Crimp Process: (D) DIP SOLDER - TERMINAL IS CRIMPED ON BARE CORE

Seal(s): NONE

This document is non-contractual  
and for information only.

For more information, please  
consult your local sales office

| Cable type / seal     | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1011 0,50 + 1007 3,00 |             | 2,78 + 3,63              | 80                 | 3,15     | 0,05         | 5,85     | 0,10         | 5,30     | 0,10         | 8,00     | 0,20         |

Cable type code legend:

1011:

Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: EAE, POLYOLEFIN, PVC, TPE, XLPE

Insul. Wall Designator: HEAVY DUTY

1007:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPA/PVDF, XLPE

Insul. Wall Designator: REGULAR

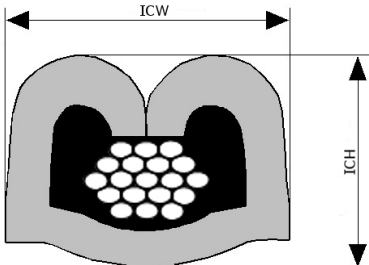

Terminal Part Number: 02977131

Surface Plating: SN

Material Thickness [mm]: 1,02

Cross Section [mm²]: 0,50 | 3,00

Cable Type codes: 1011 + 1009

Crimp Process: (D) DIP SOLDER - TERMINAL IS CRIMPED ON BARE CORE

Seal(s): NONE

This document is non-contractual  
and for information only.

For more information, please  
consult your local sales office

| Cable type / seal     | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1011 0,50 + 1009 3,00 |             | 2,78 + 4,13              | 80                 | 3,15     | 0,05         | 5,85     | 0,10         | 5,30     | 0,10         | 8,00     | 0,20         |

Cable type code legend:

1011:

Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: EAE, POLYOLEFIN, PVC, TPE, XLPE

Insul. Wall Designator: HEAVY DUTY

1009:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPE

Insul. Wall Designator: SPECIAL

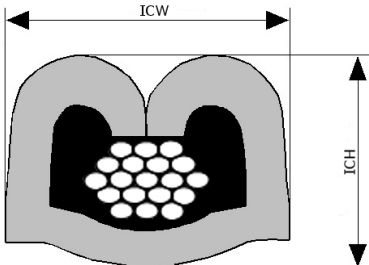

Terminal Part Number: 02977131

Surface Plating: SN

Material Thickness [mm]: 1,02

Cross Section [mm²]: 0,50 | 0,80 | 1,00 | 2,00

*This document is non-contractual  
and for information only.*

*For more information, please  
consult your local sales office*

Cable Type codes: 1011 + 1011

Crimp Process: (D) DIP SOLDER - TERMINAL IS CRIMPED ON BARE CORE

Seal(s): NONE

| Cable type / seal     | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|-----------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 1011 0,50 + 1011 0,50 |             | 2,78 + 2,78                 | 80                    | 2,80        | 0,05               | 5,10        | 0,10               | 4,50        | 0,10               | 7,30        | 0,20               |
| 1011 0,80 + 1011 0,80 |             | 3,13 + 3,13                 | 90                    | 2,80        | 0,05               | 5,80        | 0,10               | 4,50        | 0,10               | 7,80        | 0,20               |
| 1011 1,00 + 1011 1,00 |             | 3,45 + 3,45                 | 120                   | 2,95        | 0,05               | 5,80        | 0,10               | 4,70        | 0,10               | 8,20        | 0,20               |
| 1011 1,00 + 1011 2,00 |             | 3,45 + 3,90                 | 120                   | 3,10        | 0,05               | 5,80        | 0,10               | 4,80        | 0,10               | 7,80        | 0,20               |
| 1011 2,00 + 1011 2,00 |             | 3,90 + 3,90                 | 200                   | 3,15        | 0,05               | 5,85        | 0,10               | 4,90        | 0,10               | 7,50        | 0,20               |

Cable type code legend:

1011:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: EAE, POLYOLEFIN, PVC, TPE, XLPE

Insul. Wall Designator: HEAVY DUTY

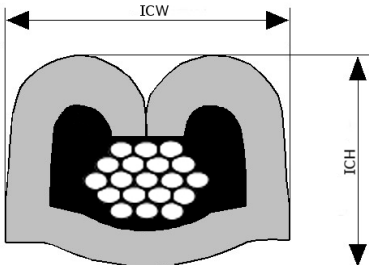

Terminal Part Number: 02977131

Surface Plating: SN

Material Thickness [mm]: 1,02

Cross Section [mm²]: 1,00 | 2,00

This document is non-contractual  
and for information only.

For more information, please  
consult your local sales office

Cable Type codes: 1011 + 1011

Crimp Process: (L) DIP SOLDER - TERMINAL CRIMPED ON SOLDERED CORE

Seal(s): NONE

| Cable type / seal     | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|-----------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 1011 1,00 + 1011 1,00 |             | 3,45 + 3,45                 | 120                   | 2,95        | 0,05               | 5,80        | 0,10               | 4,70        | 0,10               | 8,20        | 0,20               |
| 1011 1,00 + 1011 2,00 |             | 3,45 + 3,90                 | 120                   | 3,10        | 0,05               | 5,80        | 0,10               | 4,80        | 0,10               | 7,80        | 0,20               |

Cable type code legend:

1011:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: EAE, POLYOLEFIN, PVC, TPE, XLPE

Insul. Wall Designator: HEAVY DUTY

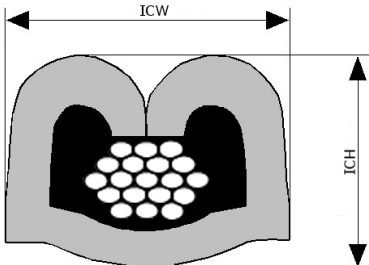

Terminal Part Number: 02977131  
Surface Plating: SN  
Material Thickness [mm]: 1,02  
Cross Section [mm²]: 3,00

*This document is non-contractual  
and for information only.*



*For more information, please  
consult your local sales office*

Cable Type codes: 1080  
Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED  
Insulation Range Φ[mm]: 4,28 - 4,54  
Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|-------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 1080 3,00         |             | 4,41                        | 250                   | 3,20        | 0,05               | 5,15        | 0,10               | 4,80        | 0,10               | 6,70        | 0,20               |

Cable type code legend:

1080:  
Industry Designator: SAE  
Conductor Material: COPPER  
Conductor Plating: SN  
Insul. Material: XLPE  
Insul. Wall Designator: HEAVY

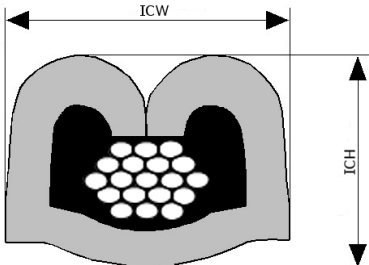



Terminal Part Number: 02977131

Surface Plating: SN

Material Thickness [mm]: 1,02

Cross Section [mm²]: 1,00 | 3,00

Cable Type codes: 1094 + 1009

Crimp Process: (D) DIP SOLDER - TERMINAL IS CRIMPED ON BARE CORE

Seal(s): NONE

This document is non-contractual  
and for information only.

For more information, please  
consult your local sales office

| Cable type / seal     | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|-----------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 1094 1,00 + 1009 1,00 |             | 3,03 + 3,17                 | 120                   | 2,95        | 0,05               | 5,80        | 0,10               | 4,70        | 0,10               | 7,70        | 0,20               |
| 1094 1,00 + 1009 3,00 |             | 3,03 + 4,13                 | 120                   | 3,20        | 0,05               | 5,80        | 0,10               | 5,00        | 0,10               | 8,60        | 0,20               |

Cable type code legend:

1094:

Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPE

Insul. Wall Designator: HEAVY DUTY

1009:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPE

Insul. Wall Designator: SPECIAL

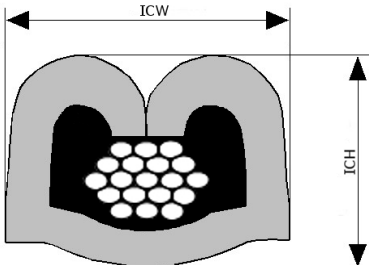

Terminal Part Number: 02977131

Surface Plating: SN

Material Thickness [mm]: 1,02

Cross Section [mm<sup>2</sup>]: 1,00

Cable Type codes: 1094 + 1094

Crimp Process: (D) DIP SOLDER - TERMINAL IS CRIMPED ON BARE CORE

Seal(s): NONE

This document is non-contractual  
and for information only.

For more information, please  
consult your local sales office

| Cable type / seal     | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|-----------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 1094 1,00 + 1094 1,00 |             | 3,03 + 3,03                 | 120                   | 2,95        | 0,05               | 5,80        | 0,10               | 4,70        | 0,10               | 7,70        | 0,20               |

Cable type code legend:

1094:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPE

Insul. Wall Designator: HEAVY DUTY

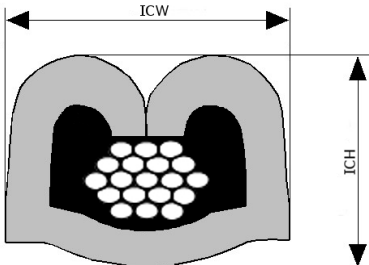

# Crimp Information Sheet

**DELPHI**

Terminal Part Number: 02977131

Surface Plating: SN

Material Thickness [mm]: 1,02

Cross Section [mm<sup>2</sup>]: 4,00

*This document is non-contractual  
and for information only.*

*For more information, please  
consult your local sales office*

Cable Type codes: 2010

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range  $\Phi$ [mm]: 3,20 - 3,70

Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|-------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 2010 4,00         |             | 3,45                        | 350                   | 3,60        | 0,05               | 5,20        | 0,10               | 5,40        | 0,10               | 6,60        | 0,20               |

## Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR  
(AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE,  
XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

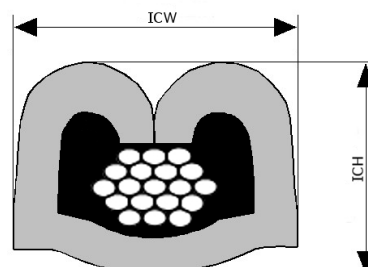

Terminal Part Number: 02977131  
Surface Plating: SN  
Material Thickness [mm]: 1,02  
Cross Section [mm²]: 4,00

*This document is non-contractual  
and for information only.*

*For more information, please  
consult your local sales office*

Cable Type codes: 2010  
Crimp Process: (D) DIP SOLDER - TERMINAL IS CRIMPED ON BARE CORE  
Insulation Range Φ[mm]: 3,20 - 3,70  
Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|-------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 2010 4,00         |             | 3,45                        | 350                   | 3,15        | 0,05               | 5,20        | 0,10               | 4,90        | 0,10               | 6,80        | 0,20               |

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

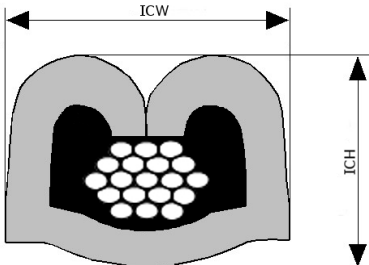

Terminal Part Number: 02977131

Surface Plating: SN

Material Thickness [mm]: 1,02

Cross Section [mm²]: 3,00 | 4,00

This document is non-contractual  
and for information only.

For more information, please  
consult your local sales office

Cable Type codes: 2010

Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED

Insulation Range Φ[mm]: 2,80 - 3,70

Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|-------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 2010 3,00         |             | 3,10                        | 240                   | 2,90        | 0,05               | 5,10        | 0,10               | 4,40        | 0,10               | 6,80        | 0,20               |
| 2010 4,00         |             | 3,45                        | 350                   | 3,15        | 0,05               | 5,20        | 0,10               | 4,90        | 0,10               | 6,80        | 0,20               |

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

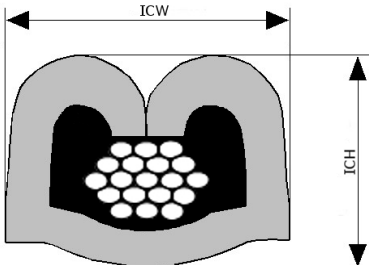

Terminal Part Number: 02977131

Surface Plating: SN

Material Thickness [mm]: 1,02

Cross Section [mm²]: 1,50 | 2,50

This document is non-contractual  
and for information only.

For more information, please  
consult your local sales office

Cable Type codes: 2010 + 2010

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Seal(s): NONE

| Cable type / seal     | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 2010 1,50 + 2010 2,50 |             | 2,20 + 2,80              | 155                | 3,10     | 0,05         | 5,20     | 0,10         | 5,55     | 0,10         | 6,90     | 0,20         |

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

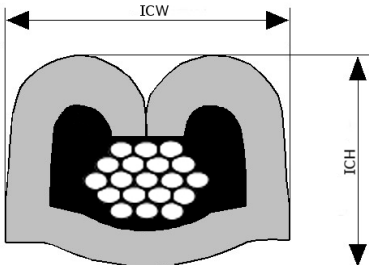

Terminal Part Number: 02977131  
Surface Plating: SN  
Material Thickness [mm]: 1,02  
Cross Section [mm²]: 4,00

*This document is non-contractual  
and for information only.*



*For more information, please  
consult your local sales office*

Cable Type codes: 2083  
Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED  
Insulation Range Φ[mm]: 3,40 - 3,80  
Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|-------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 2083 4,00         |             | 3,60                        | 265                   | 3,15        | 0,05               | 5,10        | 0,10               | 4,70        | 0,10               | 6,80        | 0,20               |

Cable type code legend:

2083:  
Industry Designator: ISO  
Conductor Material: COPPER  
Conductor Plating: NONE  
Insul. Material: PVC (YW)  
Insul. Wall Designator: THIN

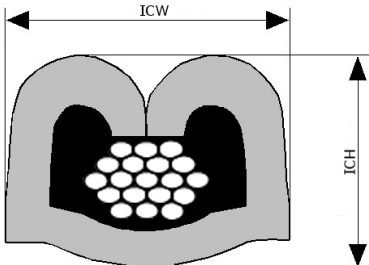



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331