

Attenuators

BNC Type

DC - 4 GHz Performance

Frequency: DC - 4.0 GHz and DC - 2.0 units available

Attenuation Values: 1 - 40 dB as noted

Attenuation Accuracy:

1 - 6 dB	± 0.3 dB
7 - 10 dB	± 0.5 dB
11 - 20 dB	± 0.75 dB
21 - 40 dB	± 1.0 dB
41-60 dB	± 1.5 dB

Impedance: 50 Ohms

VSWR: 1.25 max

Power: 2 Watts average @ +25 °C derated linearly to 0.5 Watts @ +125 °C U.O.S.

Peak Power: 200 Watts for 2Watt units and 100 Watts Peak for 5 & 10 Watt

Operating Temperature Range: -54C to +125C

Finish: Nickel Plated Brass and Black Anodized Aluminum




DC - 4.0 GHz	313 Series	Model Number
Male / Female	Female / Female	Male / Male
ATT-0313-XX-BNC-10	ATT-313F-XX-BNC-10	ATT-313M-XX-BNC-10
Attenuation Value = XX, Select 1 - 60 dB in 1 dB increments		


DC - 2.0 GHz	314 Series	Model Number
Male/Female	Female/Female	Male/Male
ATT-0314-XX-BNC-10	ATT-314F-XX-BNC-10	ATT-314M-XX-BNC-10
Attenuation Value = XX, Select 1 - 60 dB in 1 dB increments		

DC - 4.0 GHz	581 Series	Model Number
Male/Female	Female/Female	Male/Male
ATT-0581-XX-BNC-07	ATT-581F-XX-BNC-07	ATT-581M-XX-BNC-07
Attenuation Value = XX, Select 1 - 60 dB in 1 dB increments		
5 Watts		


DC - 4.0 GHz	582 Series	Model Number
Male/Female	Female/Female	Male/Male
ATT-0582-XX-BNC-07	ATT-582F-XX-BNC-07	ATT-582M-XX-BNC-07
Attenuation Value = XX, Select 1 - 60 dB in 1 dB increments		
10 Watts		





Attenuation Value	Length A
1 - 20 dB	1.36
21 - 60 dB	1.65



Attenuation Value	Length A
1 - 20 dB	1.43
21 - 60 dB	1.72



Attenuation Value	Length A
1 - 20 dB	1.55
21 - 60 dB	1.84

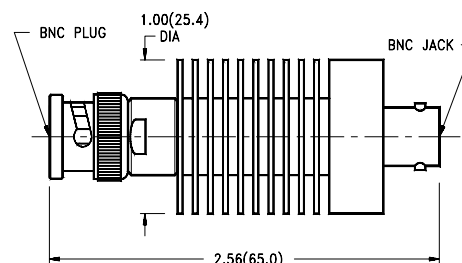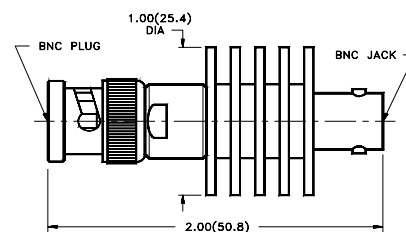

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions:](#)

[ATT-0314-03-BNC-10](#)



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331