


SPECIFICATION CONTROL DRAWING

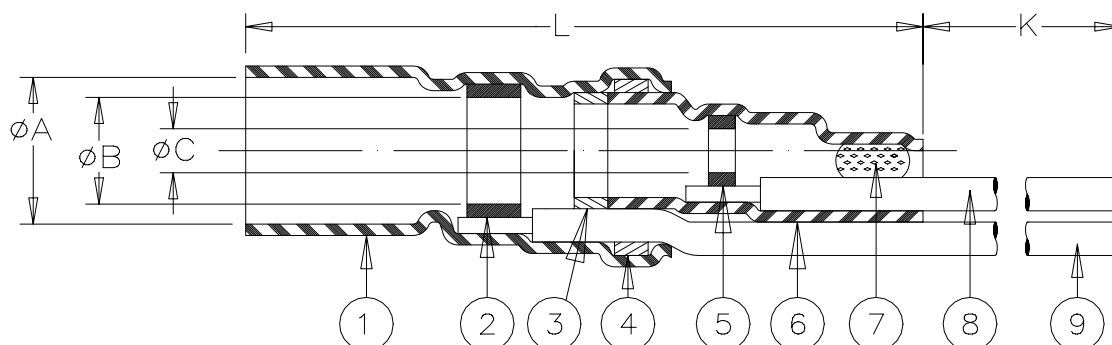

PART NAME	PRODUCT REVISION	PRODUCT DIMENSIONS					"GA" = WIRE GAUGE (AWG)
		A min	B min	C min	L max	K min	
B-021-26-N	D	6.3 (0.250)	4.6 (0.180)	2.8 (0.110)	32 (1.260)	150 (5.900)	26

CABLE DIMENSIONS				
D	E	F min	(G±0.02)	(M±0.02)
2.4 (0.095) TO 6.3 (0.250)	2.3 (0.090) TO 4.6 (0.180)	0.3 (0.012)	19 (0.750)	6 (0.235)


MATERIAL

1. & 6. INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyvinylidene fluoride. Transparent blue.
2. & 5. SOLDER PREFORMS WITH FLUX:
SOLDER: TYPE Sn63 per ANSI J-STD-006.
FLUX: TYPE ROL1 per ANSI J-STD-004.
- 3., 4. & 7. MELTABLE RINGS: Thermally stabilized thermoplastic.
8. CONDUCTOR LEAD: AWG GA (see table). MIL-W-81822/13-GA-9. ETFE insulated silver plated solid conductor. Color: white.
9. GROUND LEAD: MIL-W-81822/13-GA-G. ETFE insulated, silverplated, solid conductor. Color: blue. GA= Gauge per table.

APPLICATION

- A. The parts covered by this SCD are for use in terminating the primary conductor and the braided shield of a coaxial cable having tin or silverplated conductor and shield, rated for at least 125° C and meeting the dimensional requirements listed.
- B. Parts will meet the requirements of Raychem specification RT-1404 when installed per Raychem RPIP-500-03.

For best results, prepare the cable as shown:

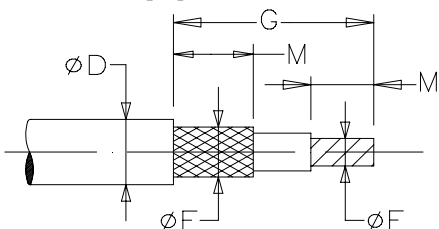

*A trademark of Tyco Electronics Corporation.

tyco <i>Electronics</i>		Tyco Electronics Corporation 305 Constitution Drive Menlo Park, CA 94025, USA		Raychem Products	COAXIAL SOLDERSLEEVE* DEVICE WITH PRE-INSTALLED LEAD SOLID WIRES			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE IN BETWEEN BRACKETS.					DOCUMENT NO: B-021-GA-N			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A		ANGLES: N/A ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DATE: 11/23/98		DOC ISSUE: 3	
DRAWN BY: R. MAPALO		REPLACES: B021XYN	DCR NUMBER: D981932	Prod. REV. SEE TABLE	SCALE:. NONE	SIZE: A	SHEET: 1 of 1	

If this document is printed it becomes uncontrolled. Check for the latest revision.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331