Series S Size 00 - .039 Centers

BeCu Plunger Tips

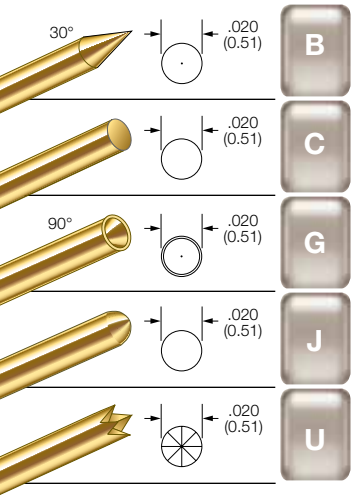

Probe Specifications

Minimum Centers: .039 (0.99)
Current Rating: 3 amps continuous
Spring Force: 1.3 or 1.6 oz. @ .050 (1.27) travel
Typical Resistance: < 55 mΩ
Maximum Travel: .090 (2.29)
Working Travel: .050 (1.27)

Rated Force oz. (g)	Preload oz. (g)	Material
1.3 (37)	0.6 (17)	BeCu
1.6 (45)	0.7 (20)	SS

Materials

Barrel: Nickel/silver, preplated gold
Spring: Beryllium copper or stainless steel, gold plated
Plunger: Beryllium copper, gold plated over nickel or Duralloy™
Receptacle: Nickel/silver, gold plated
Plug-In Terminal: Beryllium copper, preplated gold

S-00 Probe

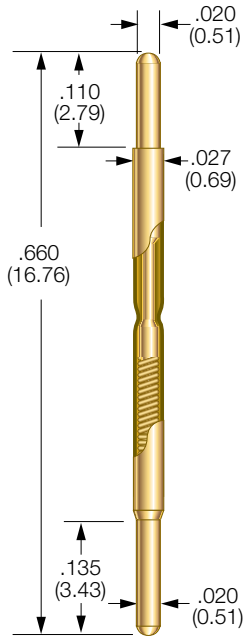

R-00 Receptacles
R00-W-390 / R00-W-500

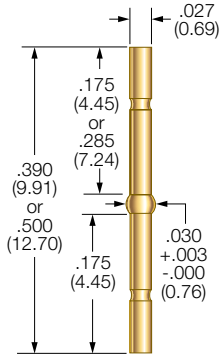

FP-Plug



Drill Size: 0.75mm
Mounting Hole Size: .028/.0295 (0.71/0.75)
Recommended Wire: 30 gage

Receptacle Options

Part Number	Style	Receptacle or Terminal Length	Probe/Receptacle Combined Length	Probe/Receptacle/Terminal Combined Length
R-00-W-390	Receptacle	0.390 (9.91)	0.915 (23.24)	1.03 (26.16)
R-00-W-500	Receptacle	0.500 (12.70)	1.025 (26.04)	1.14 (28.96)
FP-Plug	Plug-In Terminal*	0.285 (7.24)	—	—

*To order with preattached wire, add wire length and strip length (in inches) to the end of the part number. For example: R-00-W-390-36-1 or FP-Plug-36-1

How to Order: Spring Contact Probe

S	00	J	1.3	G
Series	Size	Tip Style	Spring Force	Plating Options

Spring Force:
1.3 oz. @ .050 (1.27) travel
1.6 oz. @ .050 (1.27) travel

Plating Options:
G: Gold Plated Plunger
D: Duralloy™ Plated Plunger

Crimping pliers:
CP00W-390
CP00W-500
Insertion tool: RT00

Receptacle

R	00	W	390
Series	Size	Termination	Length

Terminations:
W: Receptacle

Lengths:
390 or 500

* To order with preattached wire, add wire length and strip length (in inches) to the end of the part number. 12" and 36" standard.

View updates of this information at www.idinet.com

Specifications subject to change without notice. Dimensions in inches (millimeters)

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург, Промышленная ул, дом № 19, литера Н, помещение 100-Н Офис 331