

NOTES:

1. MATERIALS AND FINISHES:

BODY & NUT - STAINLESS STEEL,PASSIVATED
CONTACT - BeCu,GOLD PLATING
INSULATOR - PTFE,NATURAL
GASKET - SILICONE RUBBER,RED
RETAINER RING - SUS303,NATURAL

2. ELECTRICAL:

A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC - 6 GHz
C. AVERAGE INPUT POWER: 2W MAX AT +25°C
(DERATED LINEARLY TO 0.5W MAX AT +125°C)
D. ATTENUATION: XX dB ±(SEE TABLE 2D)
[FOR ADDITIONAL VALUES, CONSULT FACTORY]
E. VSWR: (SEE TABLE 2E)

3. MECHANICAL:

A. MATING ENGAGEMENT: MIL-STD-348A,SERIES: TYPE N
B. MATING TORQUE: 6-10 IN-LBS MAX.
C. COUPLING PROOF TORQUE: 15 IN-LBS MIN.
D. COUPLING NUT RETENTION: 100 LBS MIN.
E. DURABILITY: 500 CYCLES MIN.

4. ENVIRONMENTAL:

A. OPERATING TEMPERATURE: -55°C TO +125°C
B. THERMAL SHOCK: MIL-STD-202, METHOD 107,CONDITION B
(EXCEPT HIGH TEMP +100°C)
C. SHOCK: MIL-STD-202, METHOD 213,CONDITION 1
D. VIBRATION: MIL-STD-202, METHOD 204,CONDITION B


5. PACKAGING:

A. QUANTITY: SINGLE PACK
B. BAG TO BE MARKED: AMPHENOL RF
PART NUMBER (SEE TABLE 5B)
DATE CODE

THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	6/30/15	50593	JN/BCG

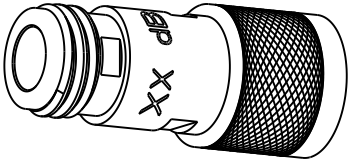

SCALE 1.000

dB	DC-18 GHz
1-6	±0.3
7-20	±0.5
21-40	±1.0
41-60	±1.5


TABLE 2D
ATTENUATION
ACCURACY

dB	DC-2.5 GHz	2.5-4 GHz	4-6 GHz
1-3	1.15:1	1.20:1	1.25:1
4-6	1.15:1	1.20:1	1.25:1
7-10	1.15:1	1.25:1	1.30:1

TABLE 2E
VSWR MAX.

PART NUMBER	ATTENUATION VALUE [dB]	"A" DIM.
ATS-1M1F-03DB2W	3	45.0 [1.77"] REF.
ATS-1M1F-06DB2W	6	45.0 [1.77"] REF.
ATS-1M1F-10DB2W	10	45.0 [1.77"] REF.
ATS-1M1F-15DB2W	15	45.0 [1.77"] REF.
ATS-1M1F-20DB2W	20	45.0 [1.77"] REF.
ATS-1M1F-30DB2W	30	53.1 [2.09"] REF.

TABLE 5B
PART NUMBER
IDENFICATION

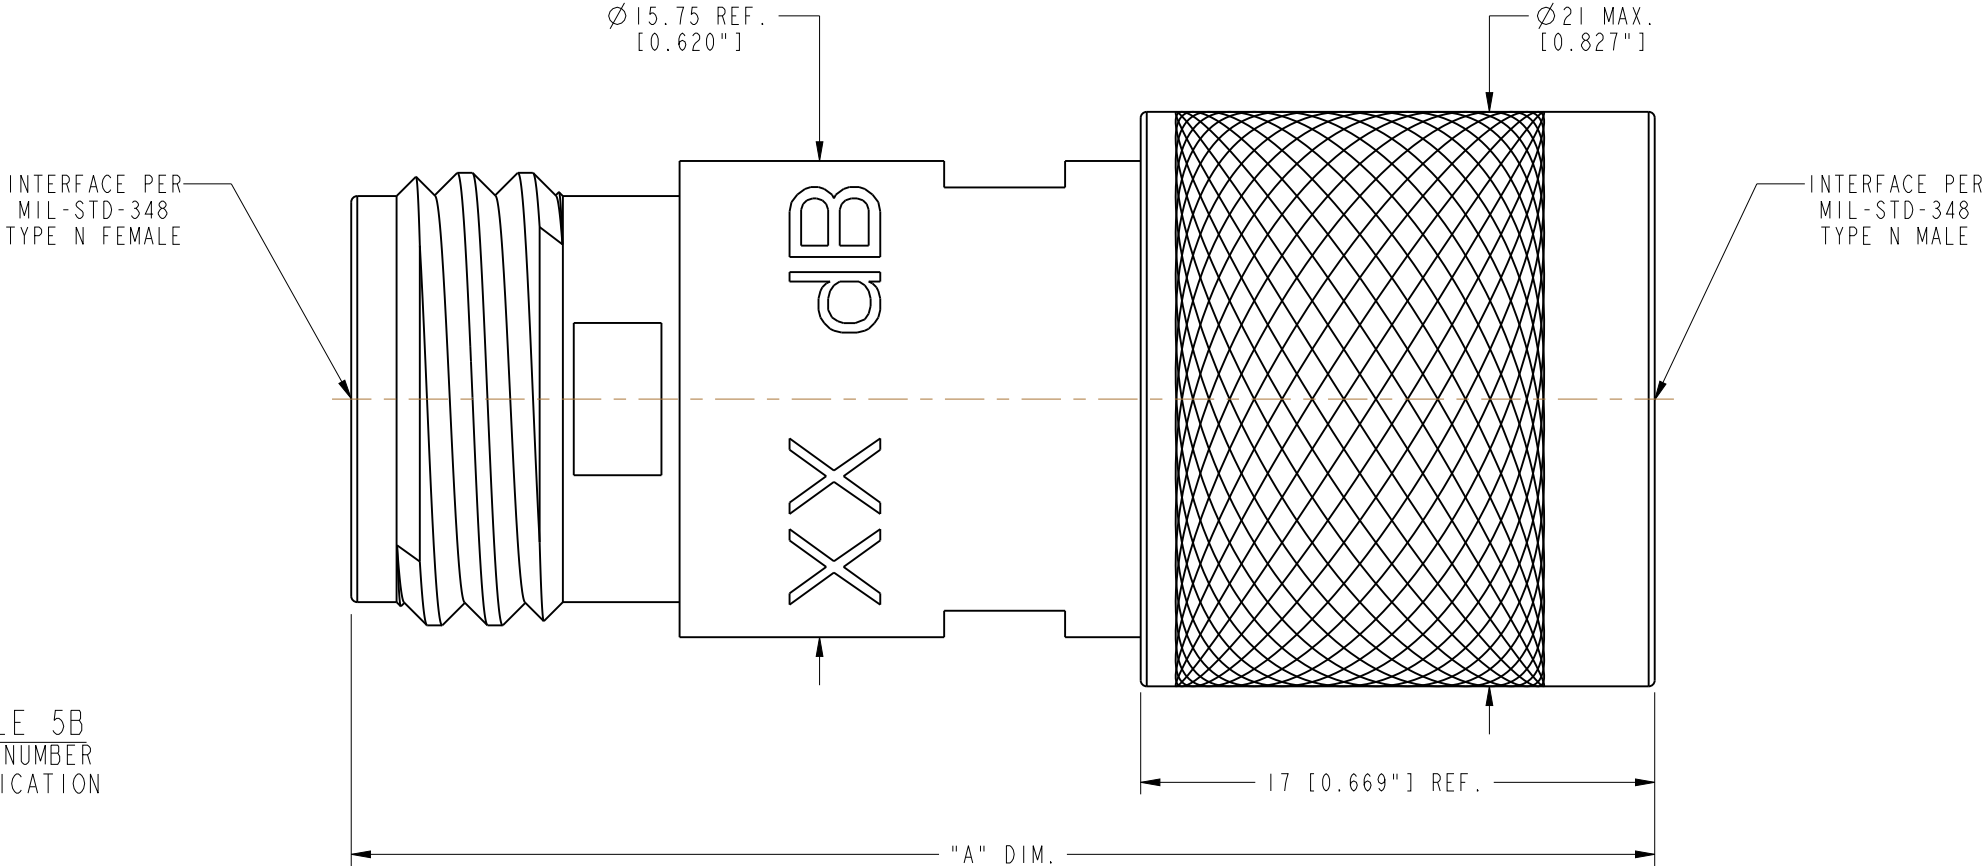

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ± 0.05mm ±0.1mm ±0.2mm ± 0.3mm ±1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL	DRAWN	DATE	TITLE TYPE N, PLUG TO JACK FIXED ATTENUATOR (2 WATT)		Amphenol RF www.amphenolrf.com	
	SEE NOTES	J. NERI	05-Mar-15				
			ENGINEER	DATE			
		REFERENCE	APPROVED	DATE	SCALE: 8.0:1.0 SHEET 2 OF 2		DRAWING NO. ATS-2M2F-XXDB2W
		EAR #6507	K. CAPOZZI	6/30/15			ITEM NO. ATS-2M2F-XXDB2W
	CONFIGURATION LEVEL: In Work	CAD FILE		DWG SIZE B		REV A	PART NO. ATS-2M2F-XXDB2W
	FINISH						



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331