


METRIC	3RD ANGLE PROJECTION	NUMBER
		C-17343688

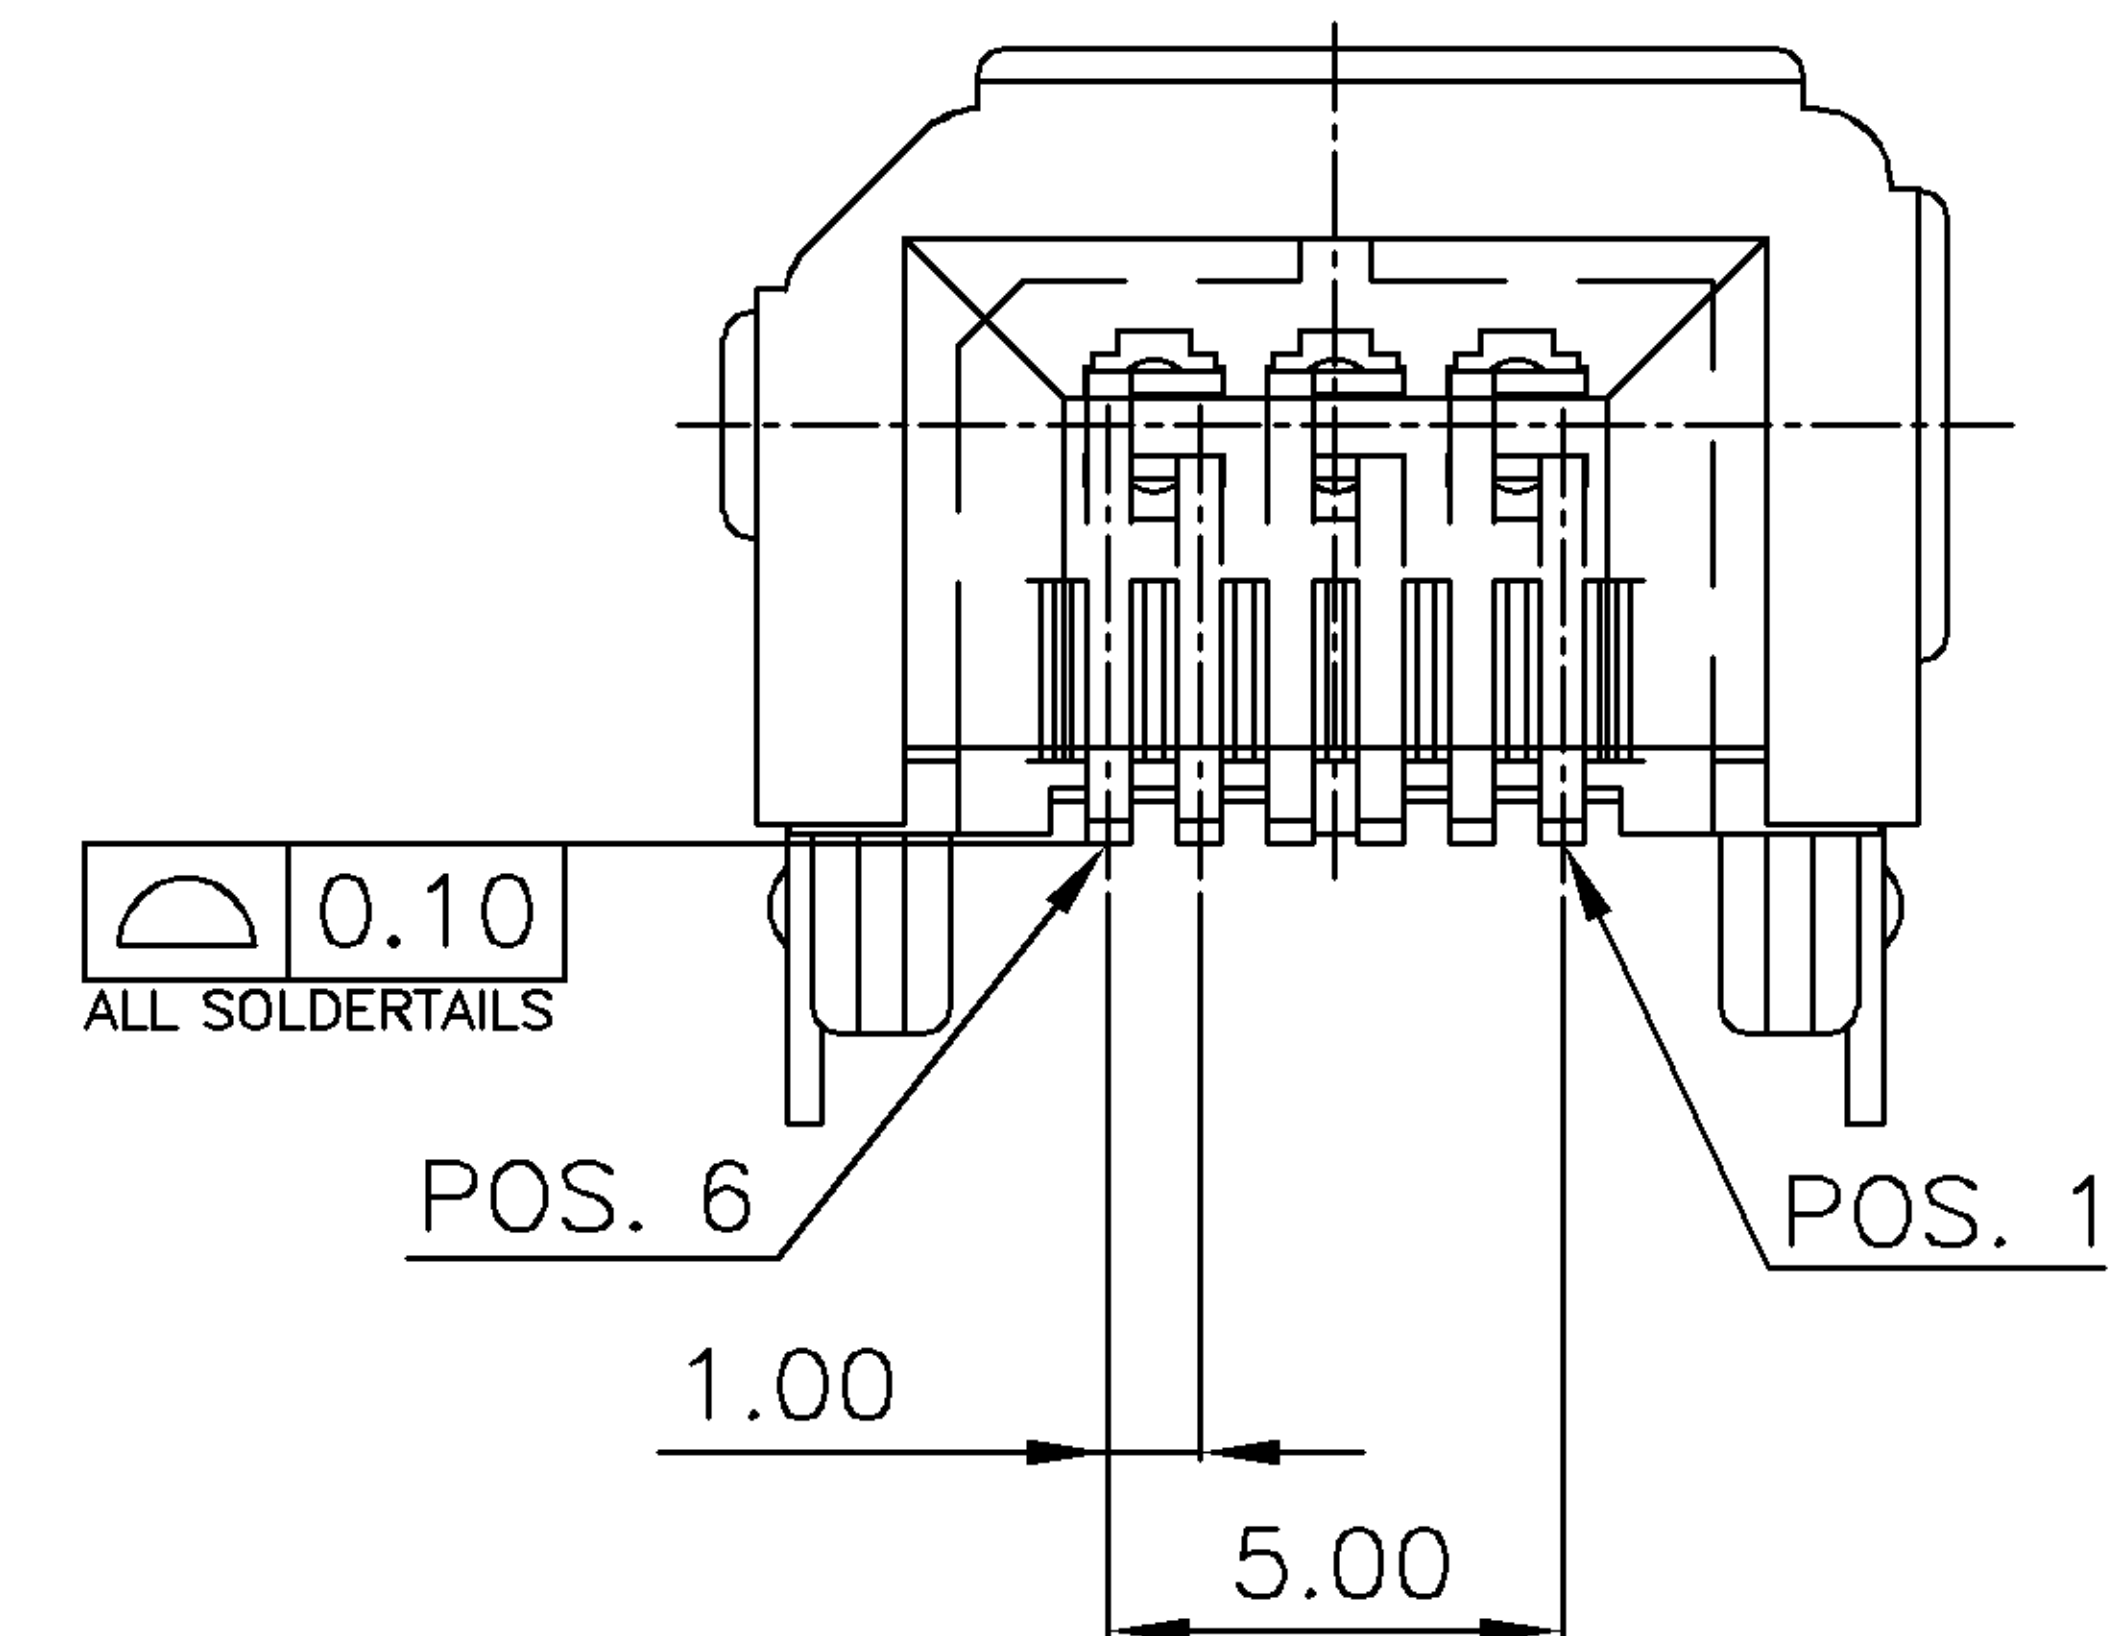

1. MATERIAL:
HOUSING: THERMOPLASTIC HIGH TEMP., GLASS FIBER FILLED.
UL 94V-0 RATED, COLOR: SEE TABLE.
CONTACT: BRASS, THICKNESS=0.25mm.
SHELL: PHOSPHOR BRONZE, THICKNESS=0.40mm.
BACK SHELL: STEEL, THICKNESS=0.30mm.
2. FINISH :
CONTACT: 30 μ " MIN. GOLD PLATING ON CONTACT AREA,
120 μ " MIN. TIN-Cu PLATING ON SOLDER TAILS,
50 μ " MIN. NICKEL UNDERPLATING OVERALL.
SHELL: 100 μ " MIN. NICKEL PLATING OVER 100 μ " MIN. Cu UNDERPLATED.
BACK SHELL: 100 μ " MIN. NICKEL PLATING OVER 100 μ " MIN. Cu UNDERPLATED.
3. REFLOW SOLDER CAPABLE TO 260°C PER TYCO SPEC 109-201, CONDITION B.

REEL	NATURAL	1-1734368-2
	BLACK	1-1734368-1
TUBE	NATURAL	1734368-2
	BLACK	1734368-1
PACKAGE	HSG. COLOR	PART NUMBER

TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 0.50 1 PLC ± 0.38 2 PLC ± 0.25 3 PLC ± 0.05 ANGLES ± 3°	DWN	O. HU		tyco Electronics TYCO HOLDINGS (BERMUDA) VII LTD. TAIWAN BRANCH		
		25-MAY-2005				
	CHK	S. HOU		NAME		
		25-MAY-2005				
MATERIAL SEE NOTE	APVD	W.J. KE		SOCKET ASSEMBLY, RIGHT ANGLE 6 POS. FLAT SMT, IEEE 1394		
		25-MAY-2005				
	PRODUCT SPEC					
	108-57559					
FINISH SEE NOTE	QUALIFICATION TEST REPORT		LOC	SIZE	DRAWING NO	REV
	501-57651		DW	A ₃	C-1734368	0
	WEIGHT		SCALE		SHEET	
	2.25g		--		1 OF 3	

O	FIRST RELEASED		OH AW	27MAR 2005
LTR	REVISION RECORD	ECN	DWN CHK	DATE

CUSTOMER DRAWING

D

C


B

A

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM AMP (TAIWAN) LTD. DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT.


PRINT DIST
DW

METRIC

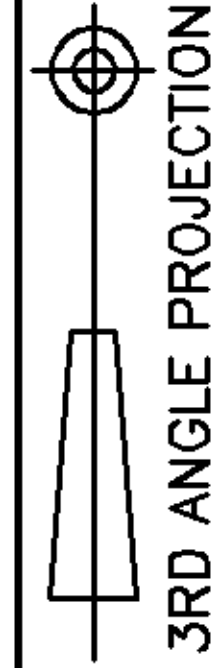

NUMBER
C-1734368

- NOTE:
- MATERIAL:
TUBE : PS.
SHIPPING CARTON : CORRUGATED FIBERBOARD.
 - DIMENSION:
TUBE : L=400, W=19.9, H=16.5mm.
SHIPPING CARTON : L=419.1, W=162.4, H=162.4mm.
 - QUANTITY:
PRIMARY PACKING : 29 PCS/TUBES
SECONDARY PACKING : 40 TUBES/CARTON(1160PCS).
 - WEIGHT:
NET WEIGHT : 2.6kg.
GROSS WEIGHT : 3.8kg.

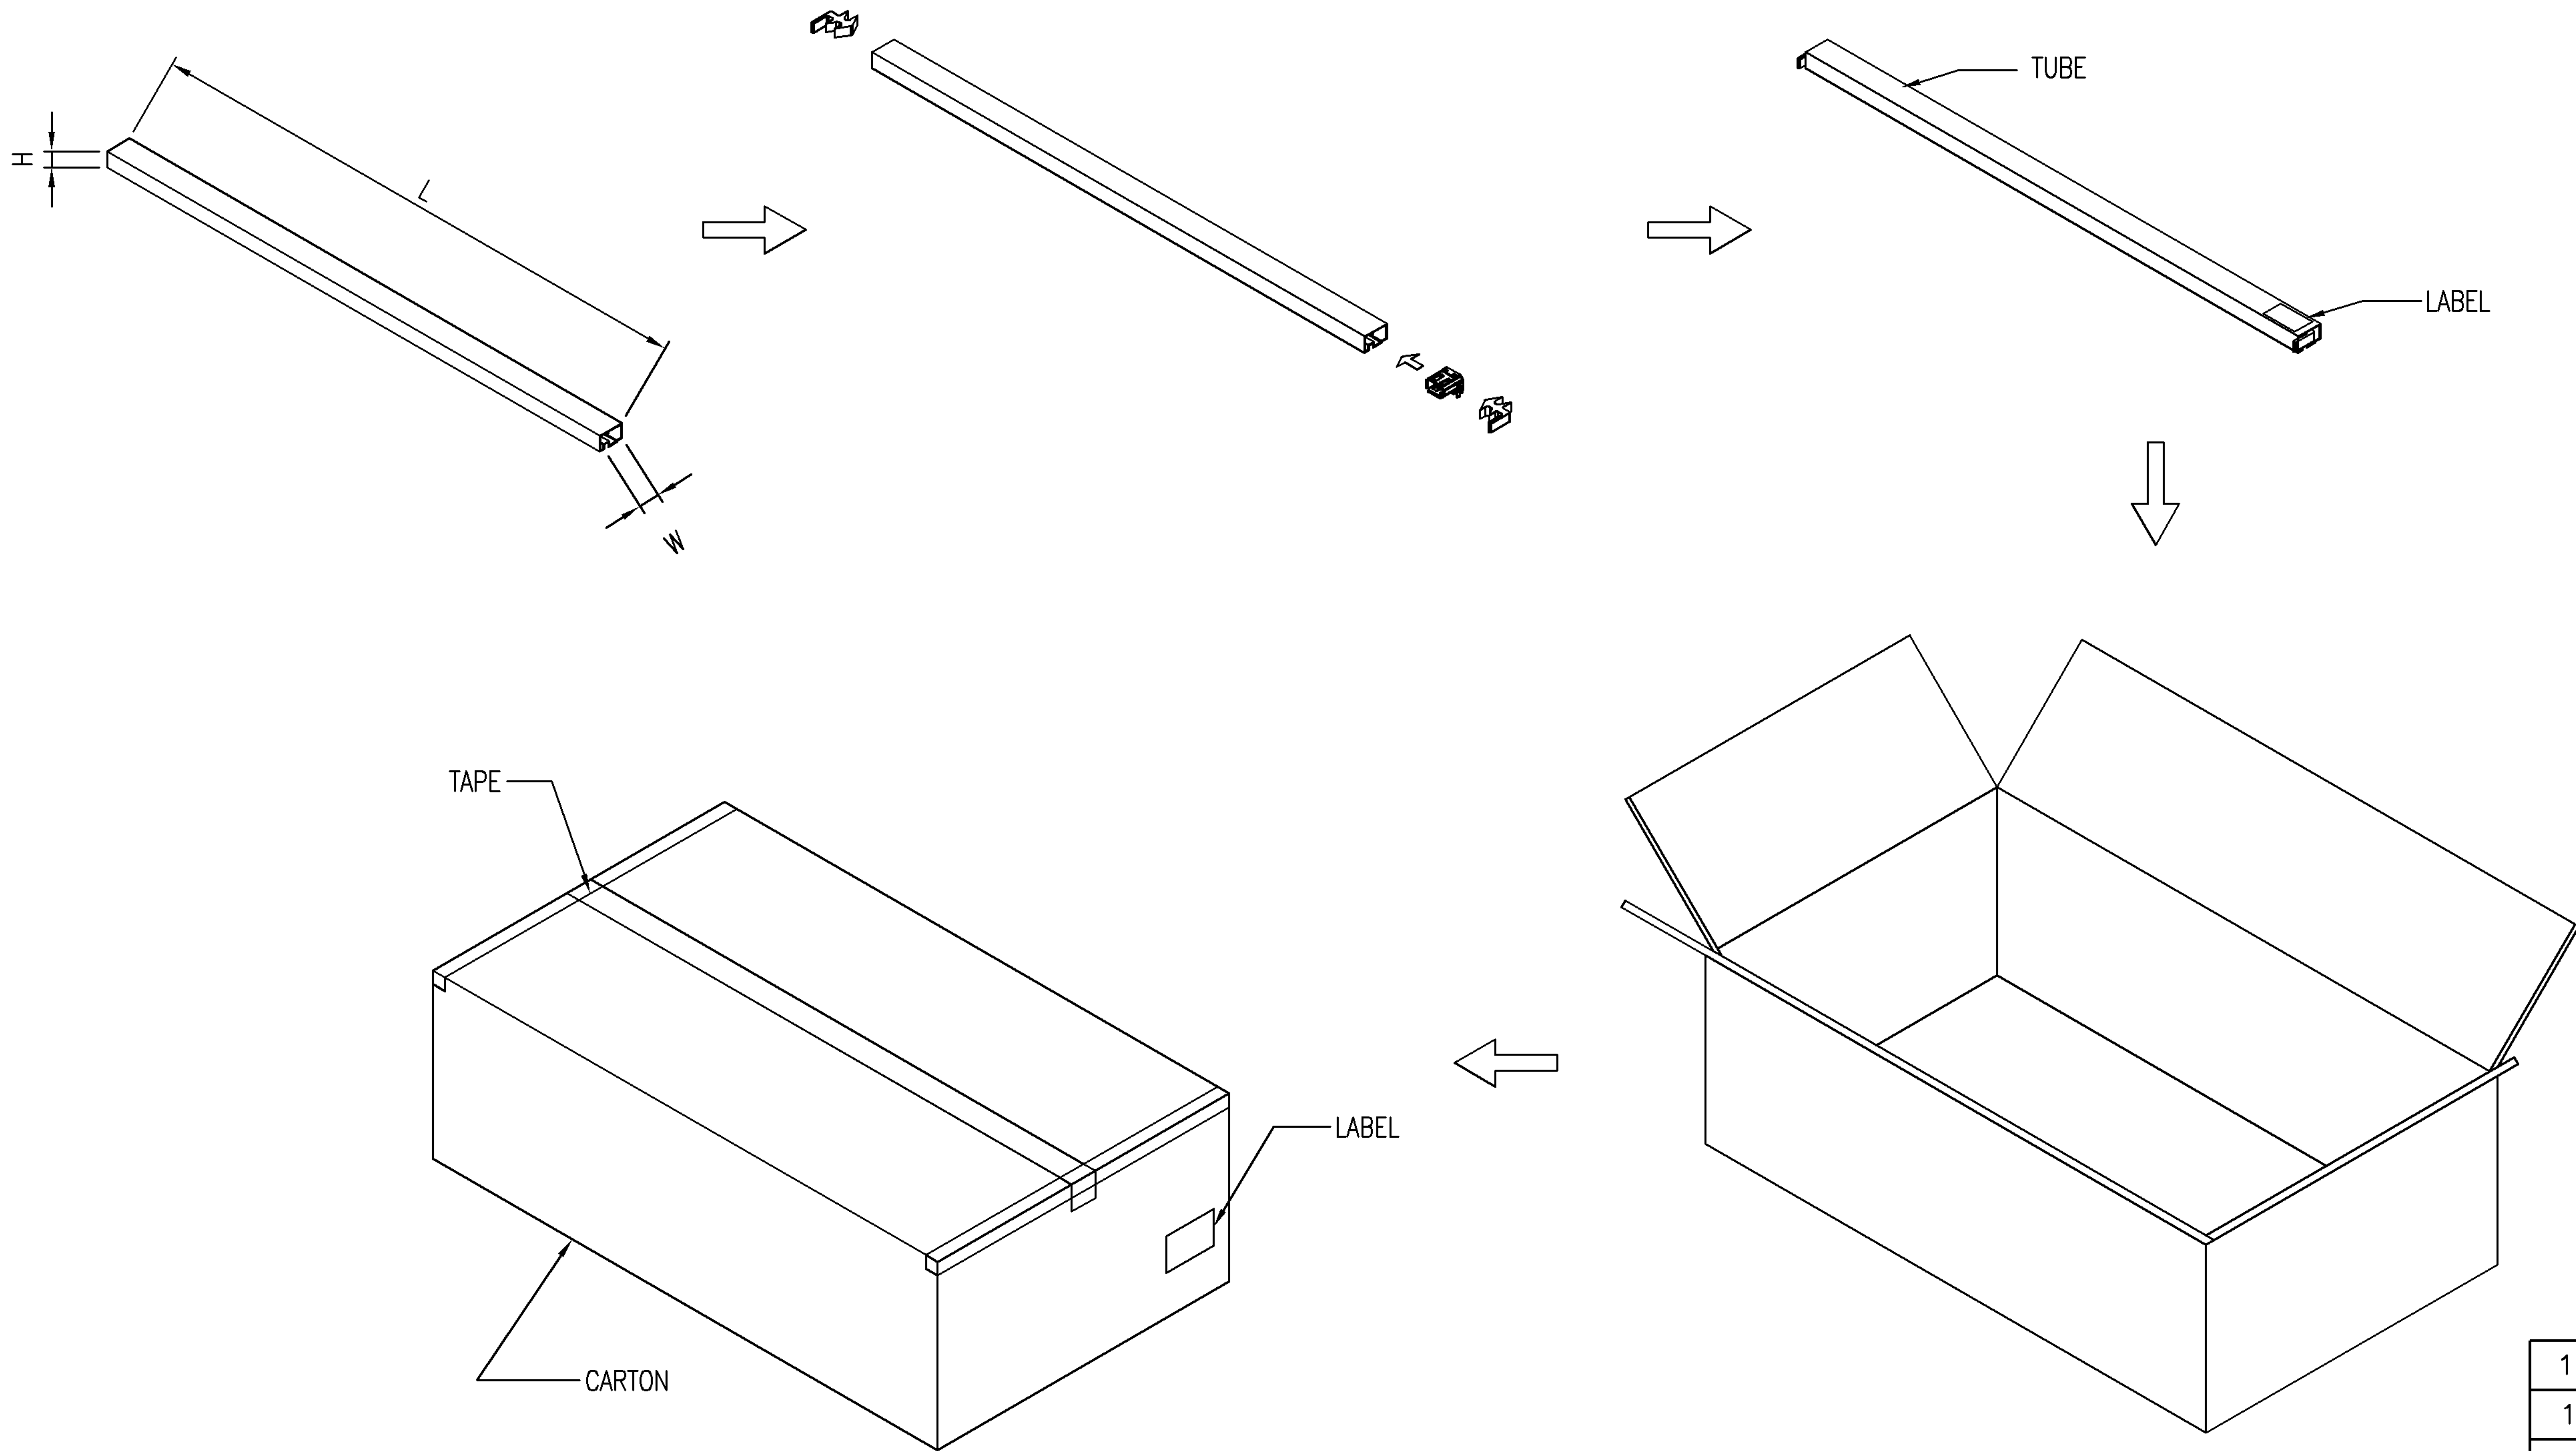

	SEE SHEET 1.			
LTR	REVISION RECORD	ECN	DWN CHK	DATE

TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± ANGLES ±	DWN O. HU 25-MAY-2005	tyco Electronics TYCO HOLDINGS (BERMUDA) VII LTD. TAIWAN BRANCH			
	CHK S. HOU 25-MAY-2005				
MATERIAL SEE SHEET 1.	APVD W.J. KE 25-MAY-2005	NAME SOCKET ASSEMBLY, RIGHT ANGLE 6 POS. FLAT SMT, IEEE 1394			
	PRODUCT SPEC				
FINISH SEE SHEET 1.	QUALIFICATION TEST REPORT	LOC DW	SIZE A₃	DRAWING NO C-1734368	REV O
	WEIGHT	SCALE --		SHEET 2 OF 3	


1734368-2
1734368-1
PART NUMBER

CUSTOMER DRAWING





THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM AMP (TAIWAN) LTD.
DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT.

PRINT DIST
DW


METRIC

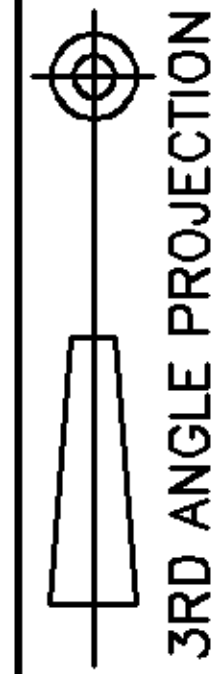

NUMBER
C-1734368

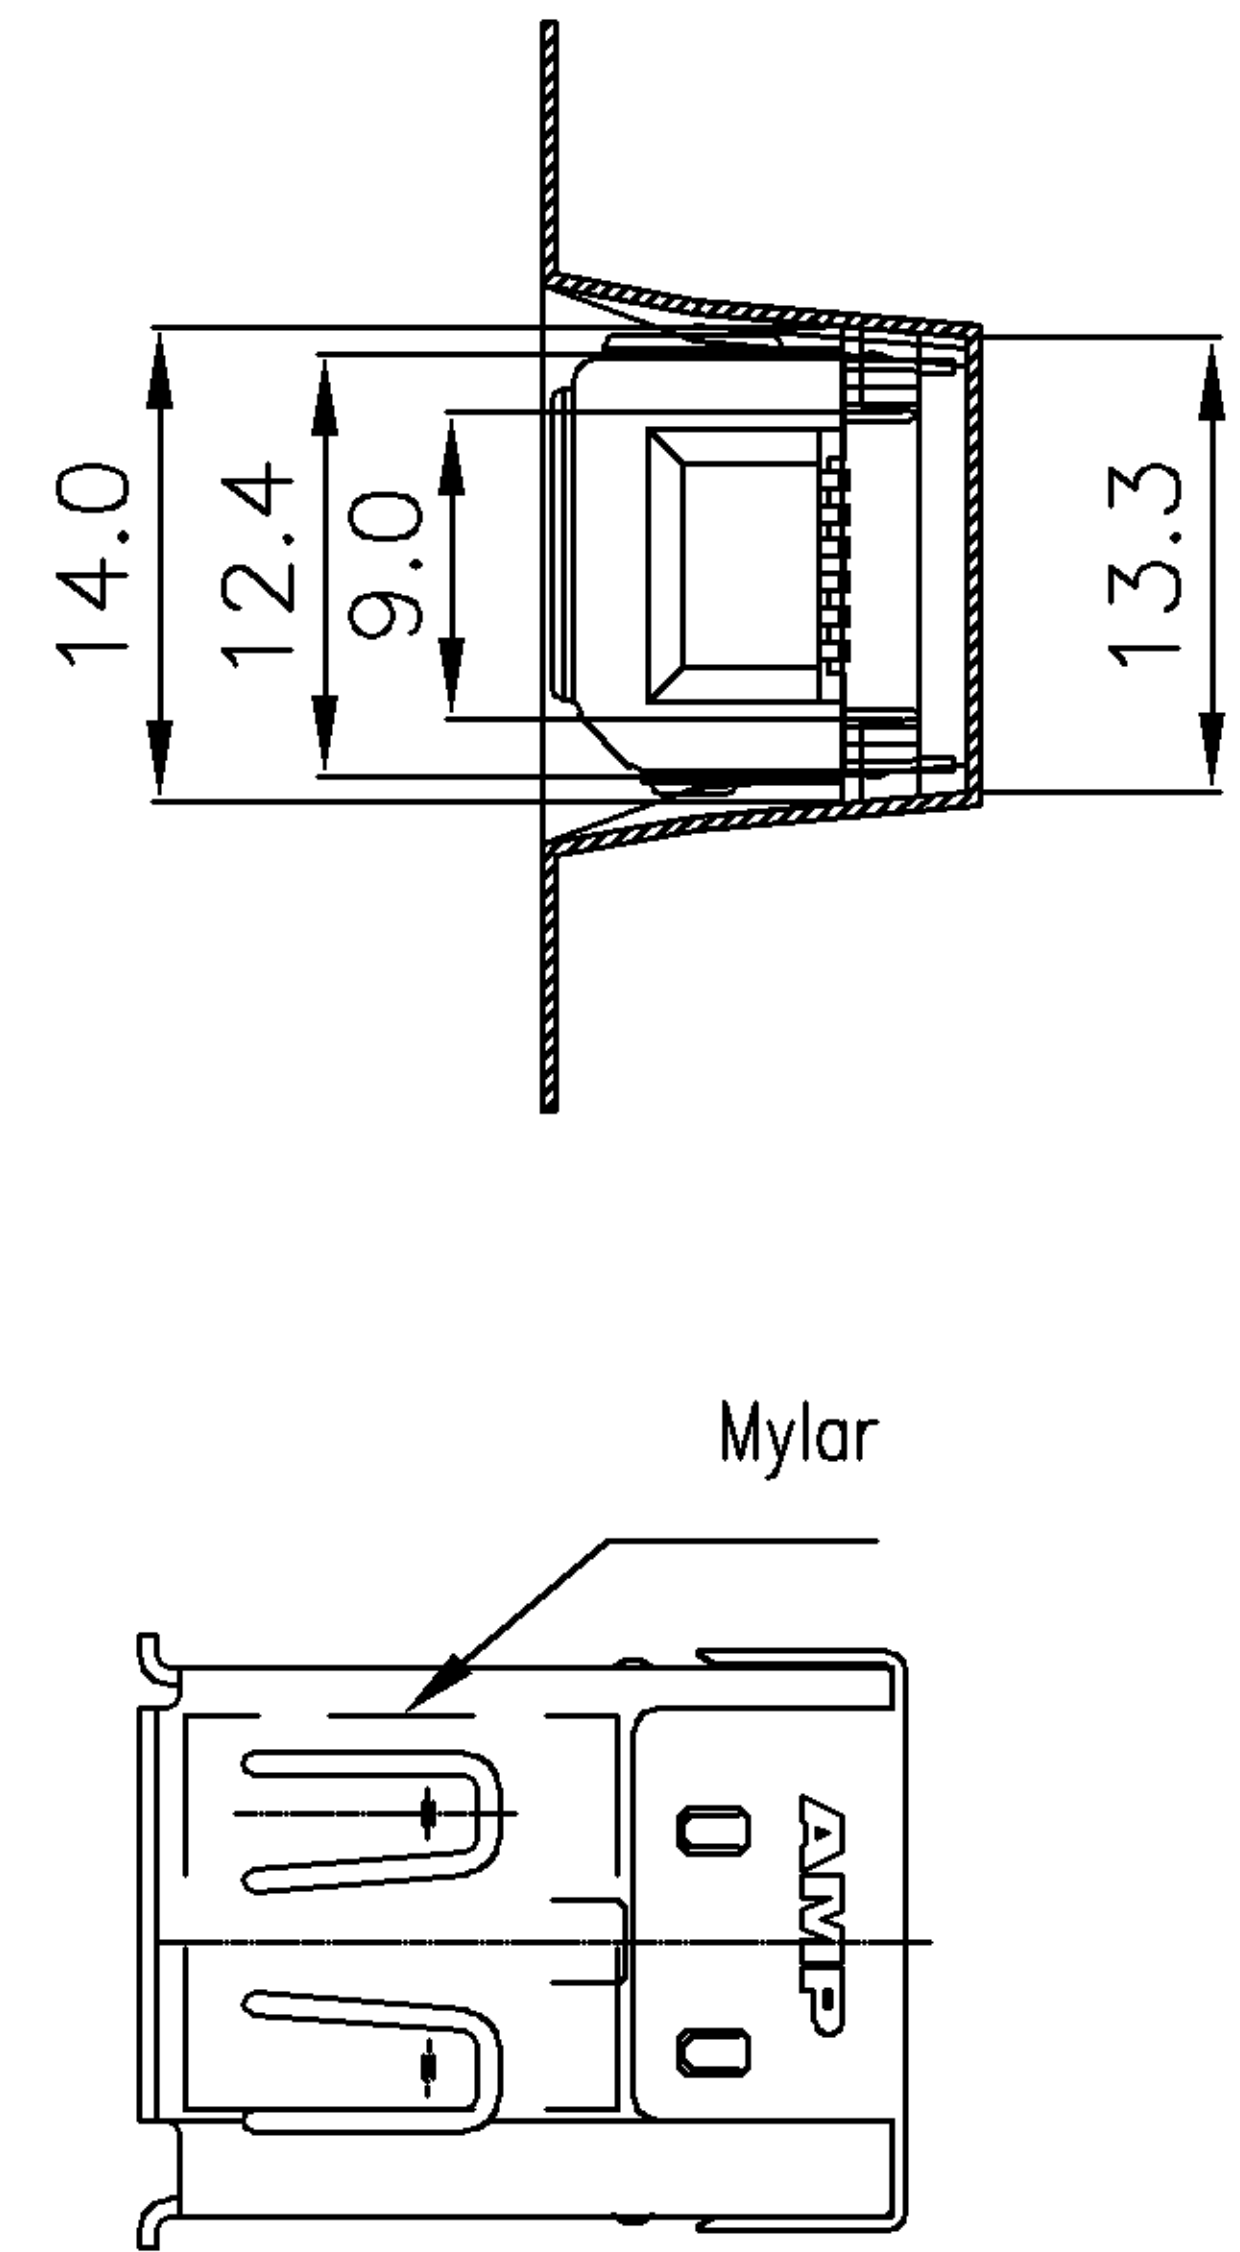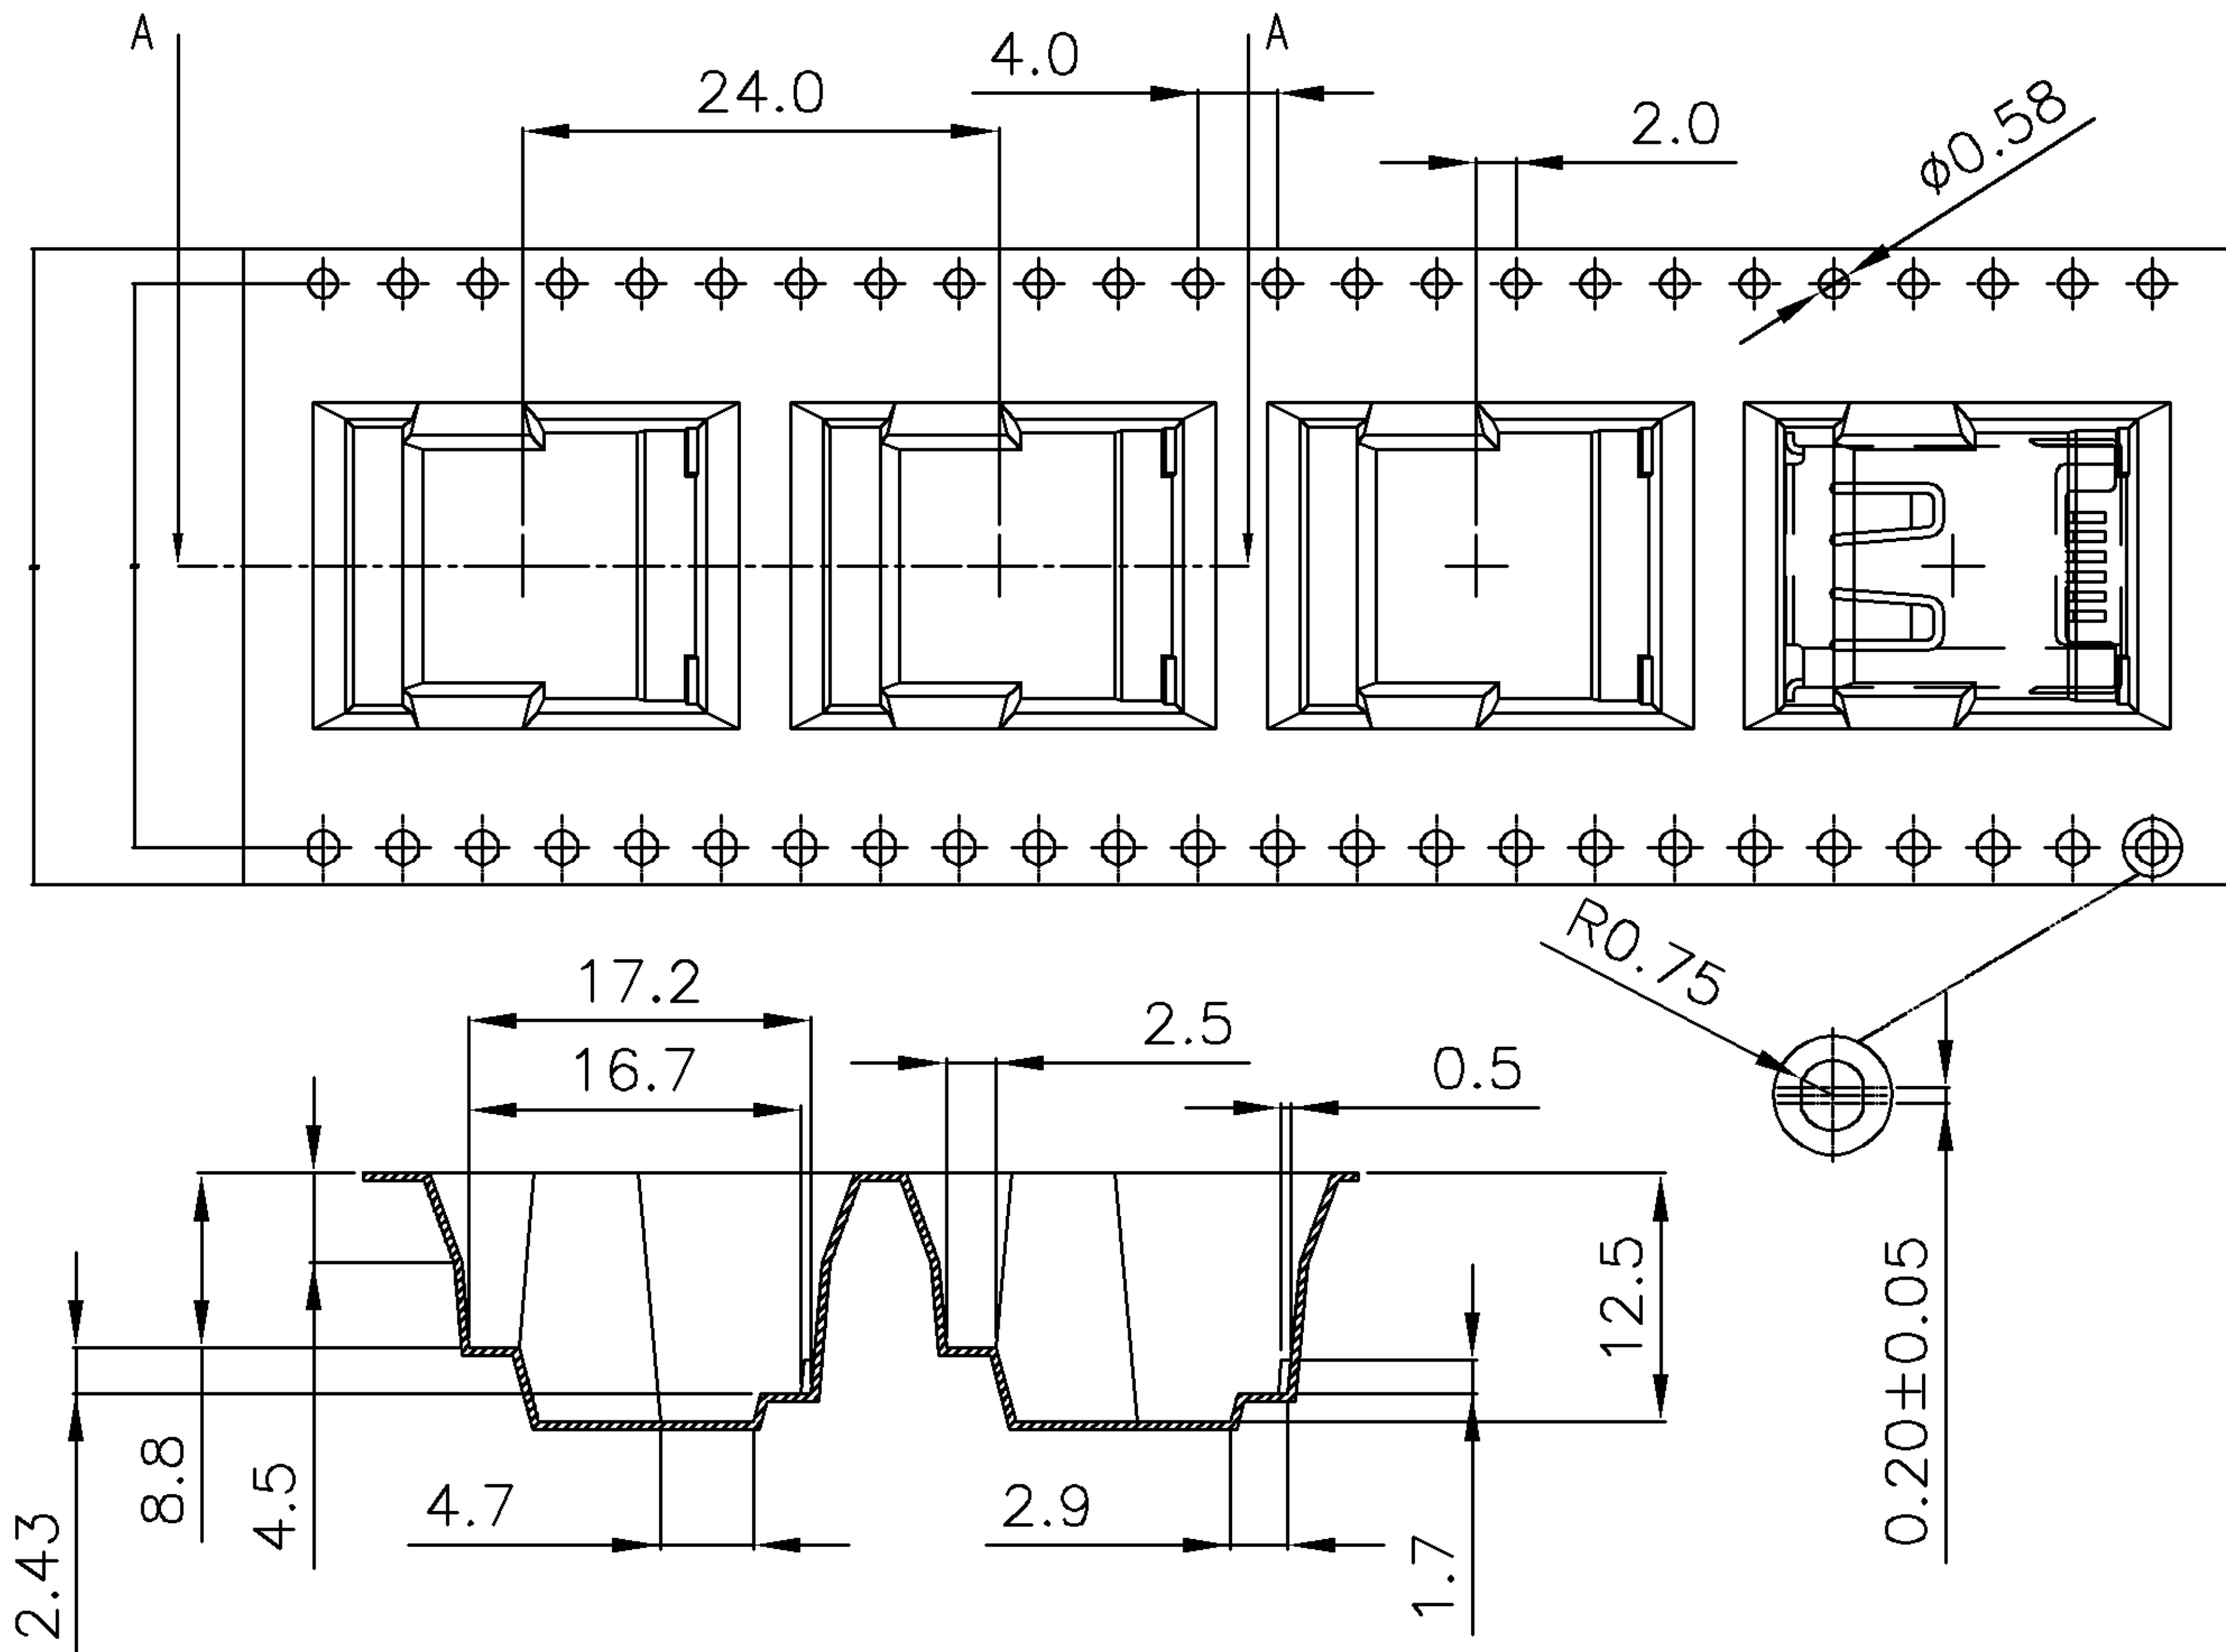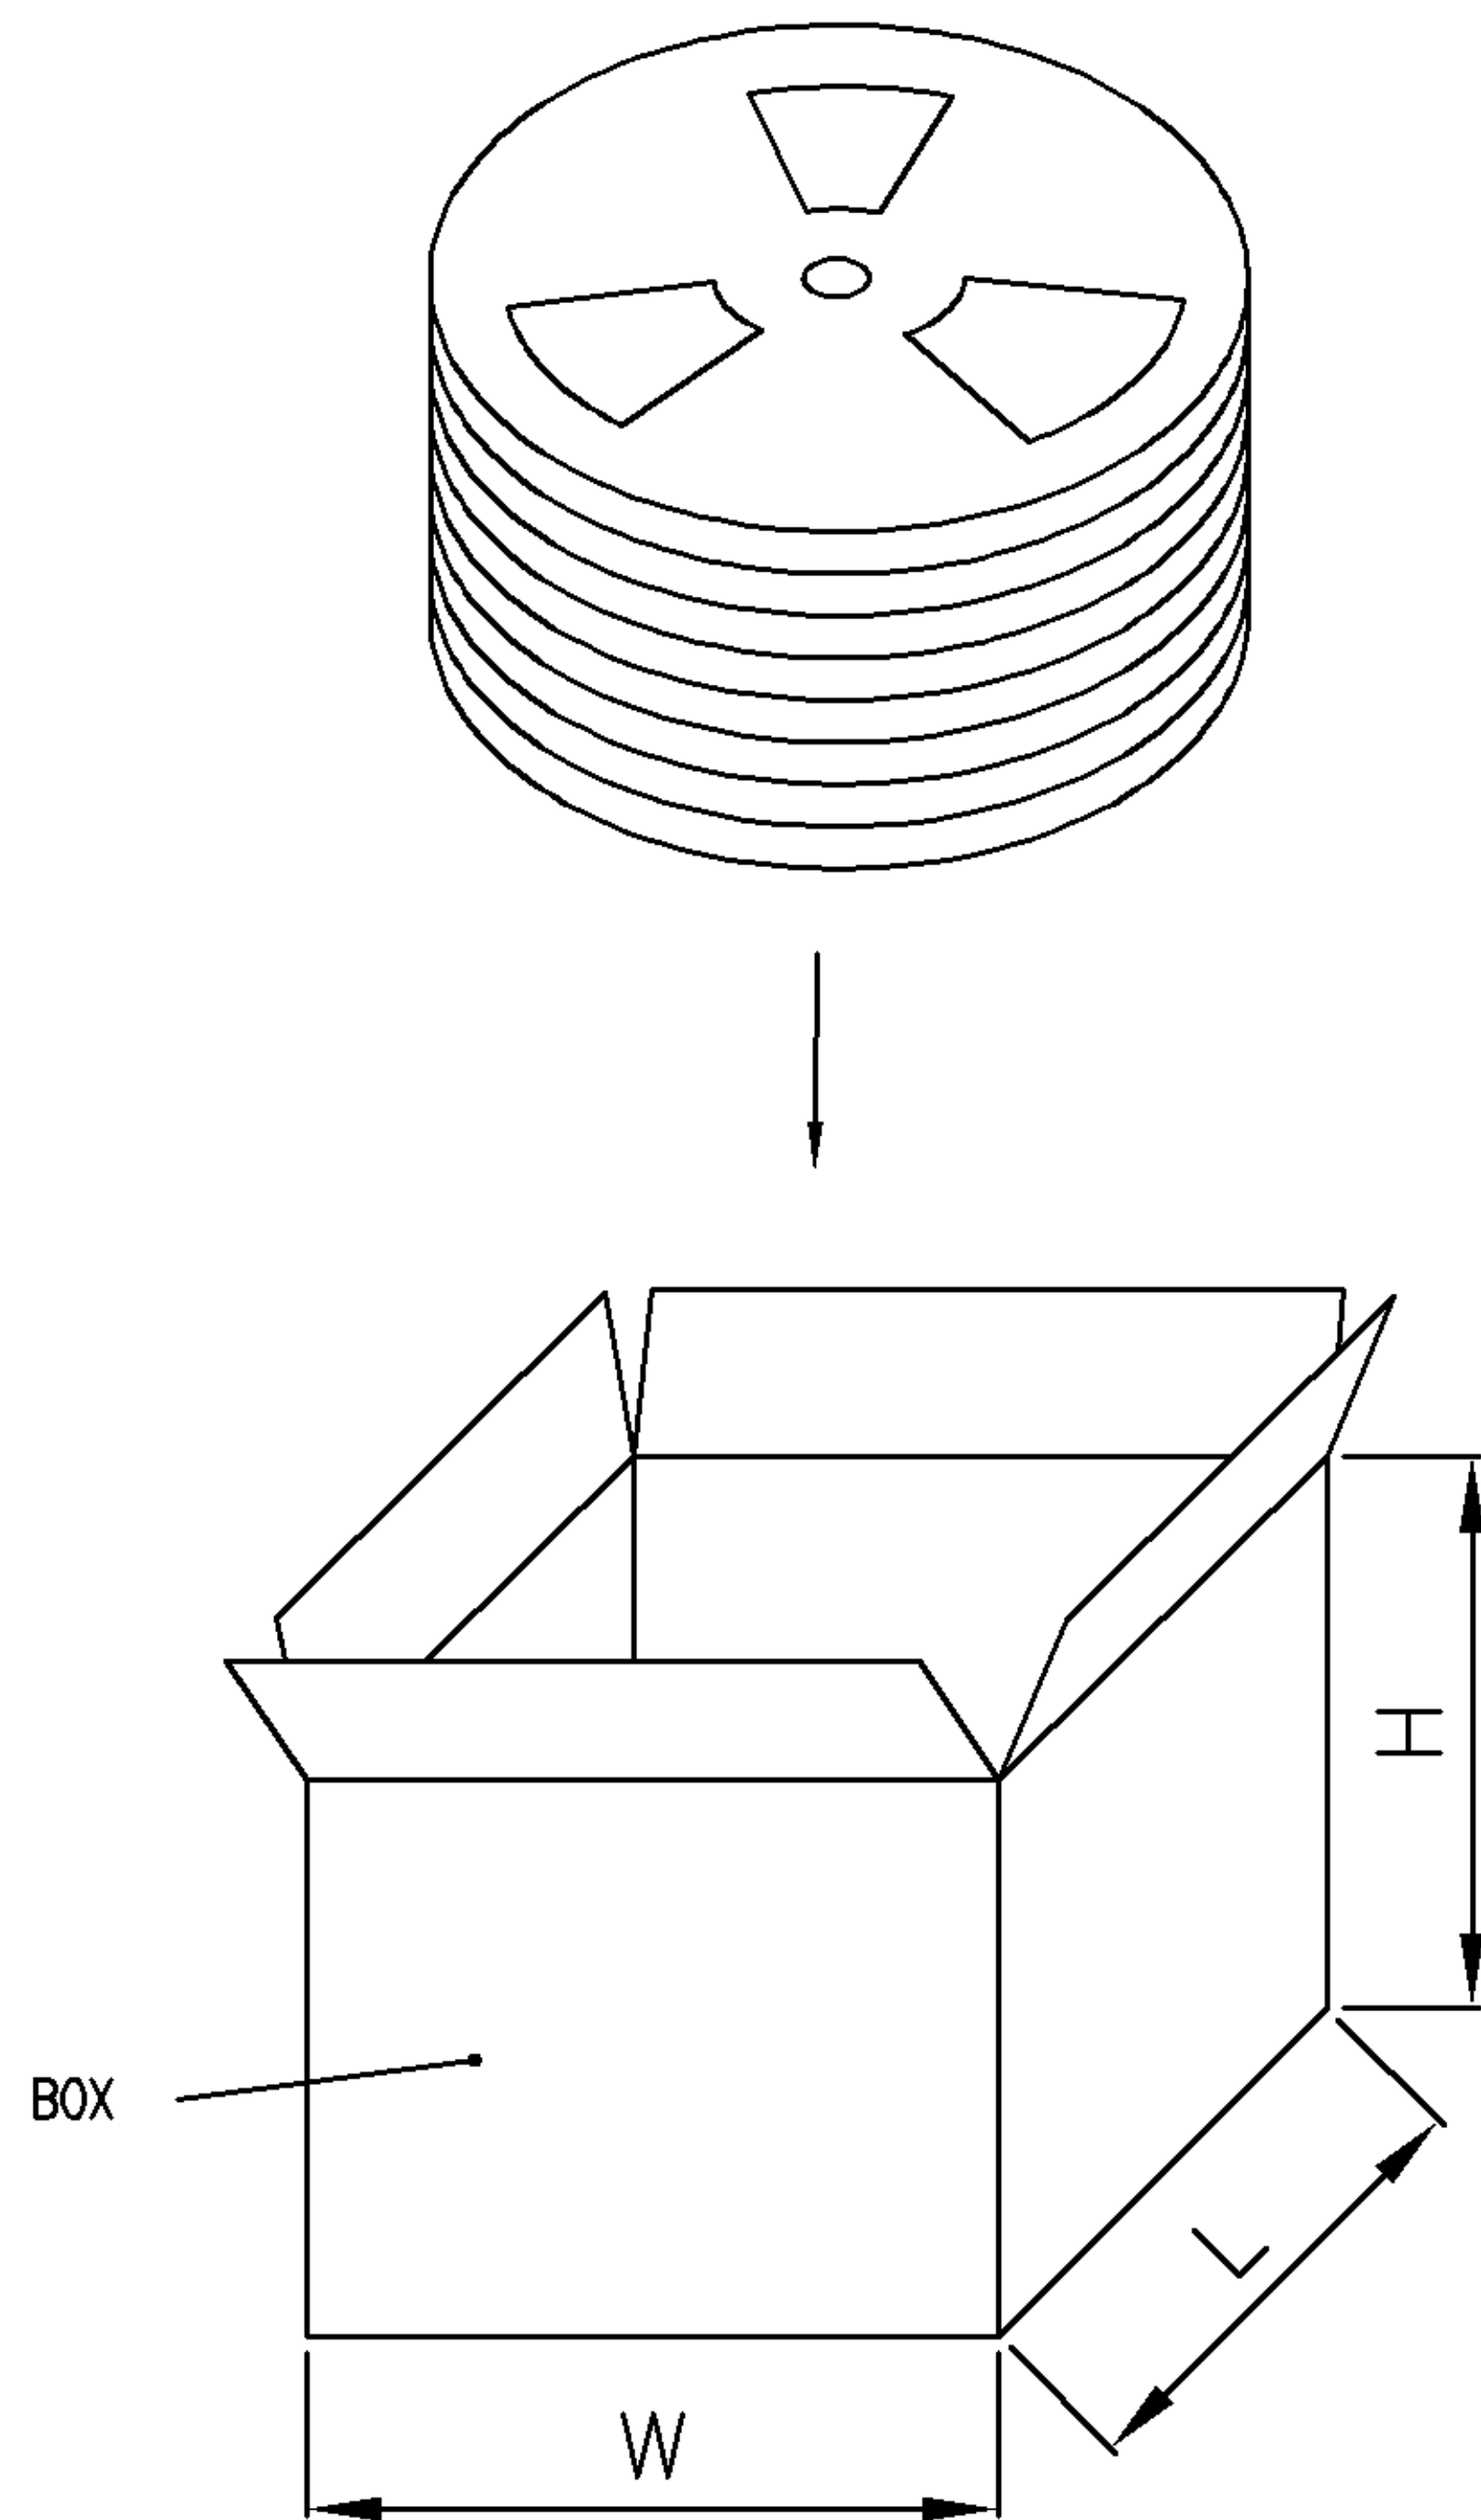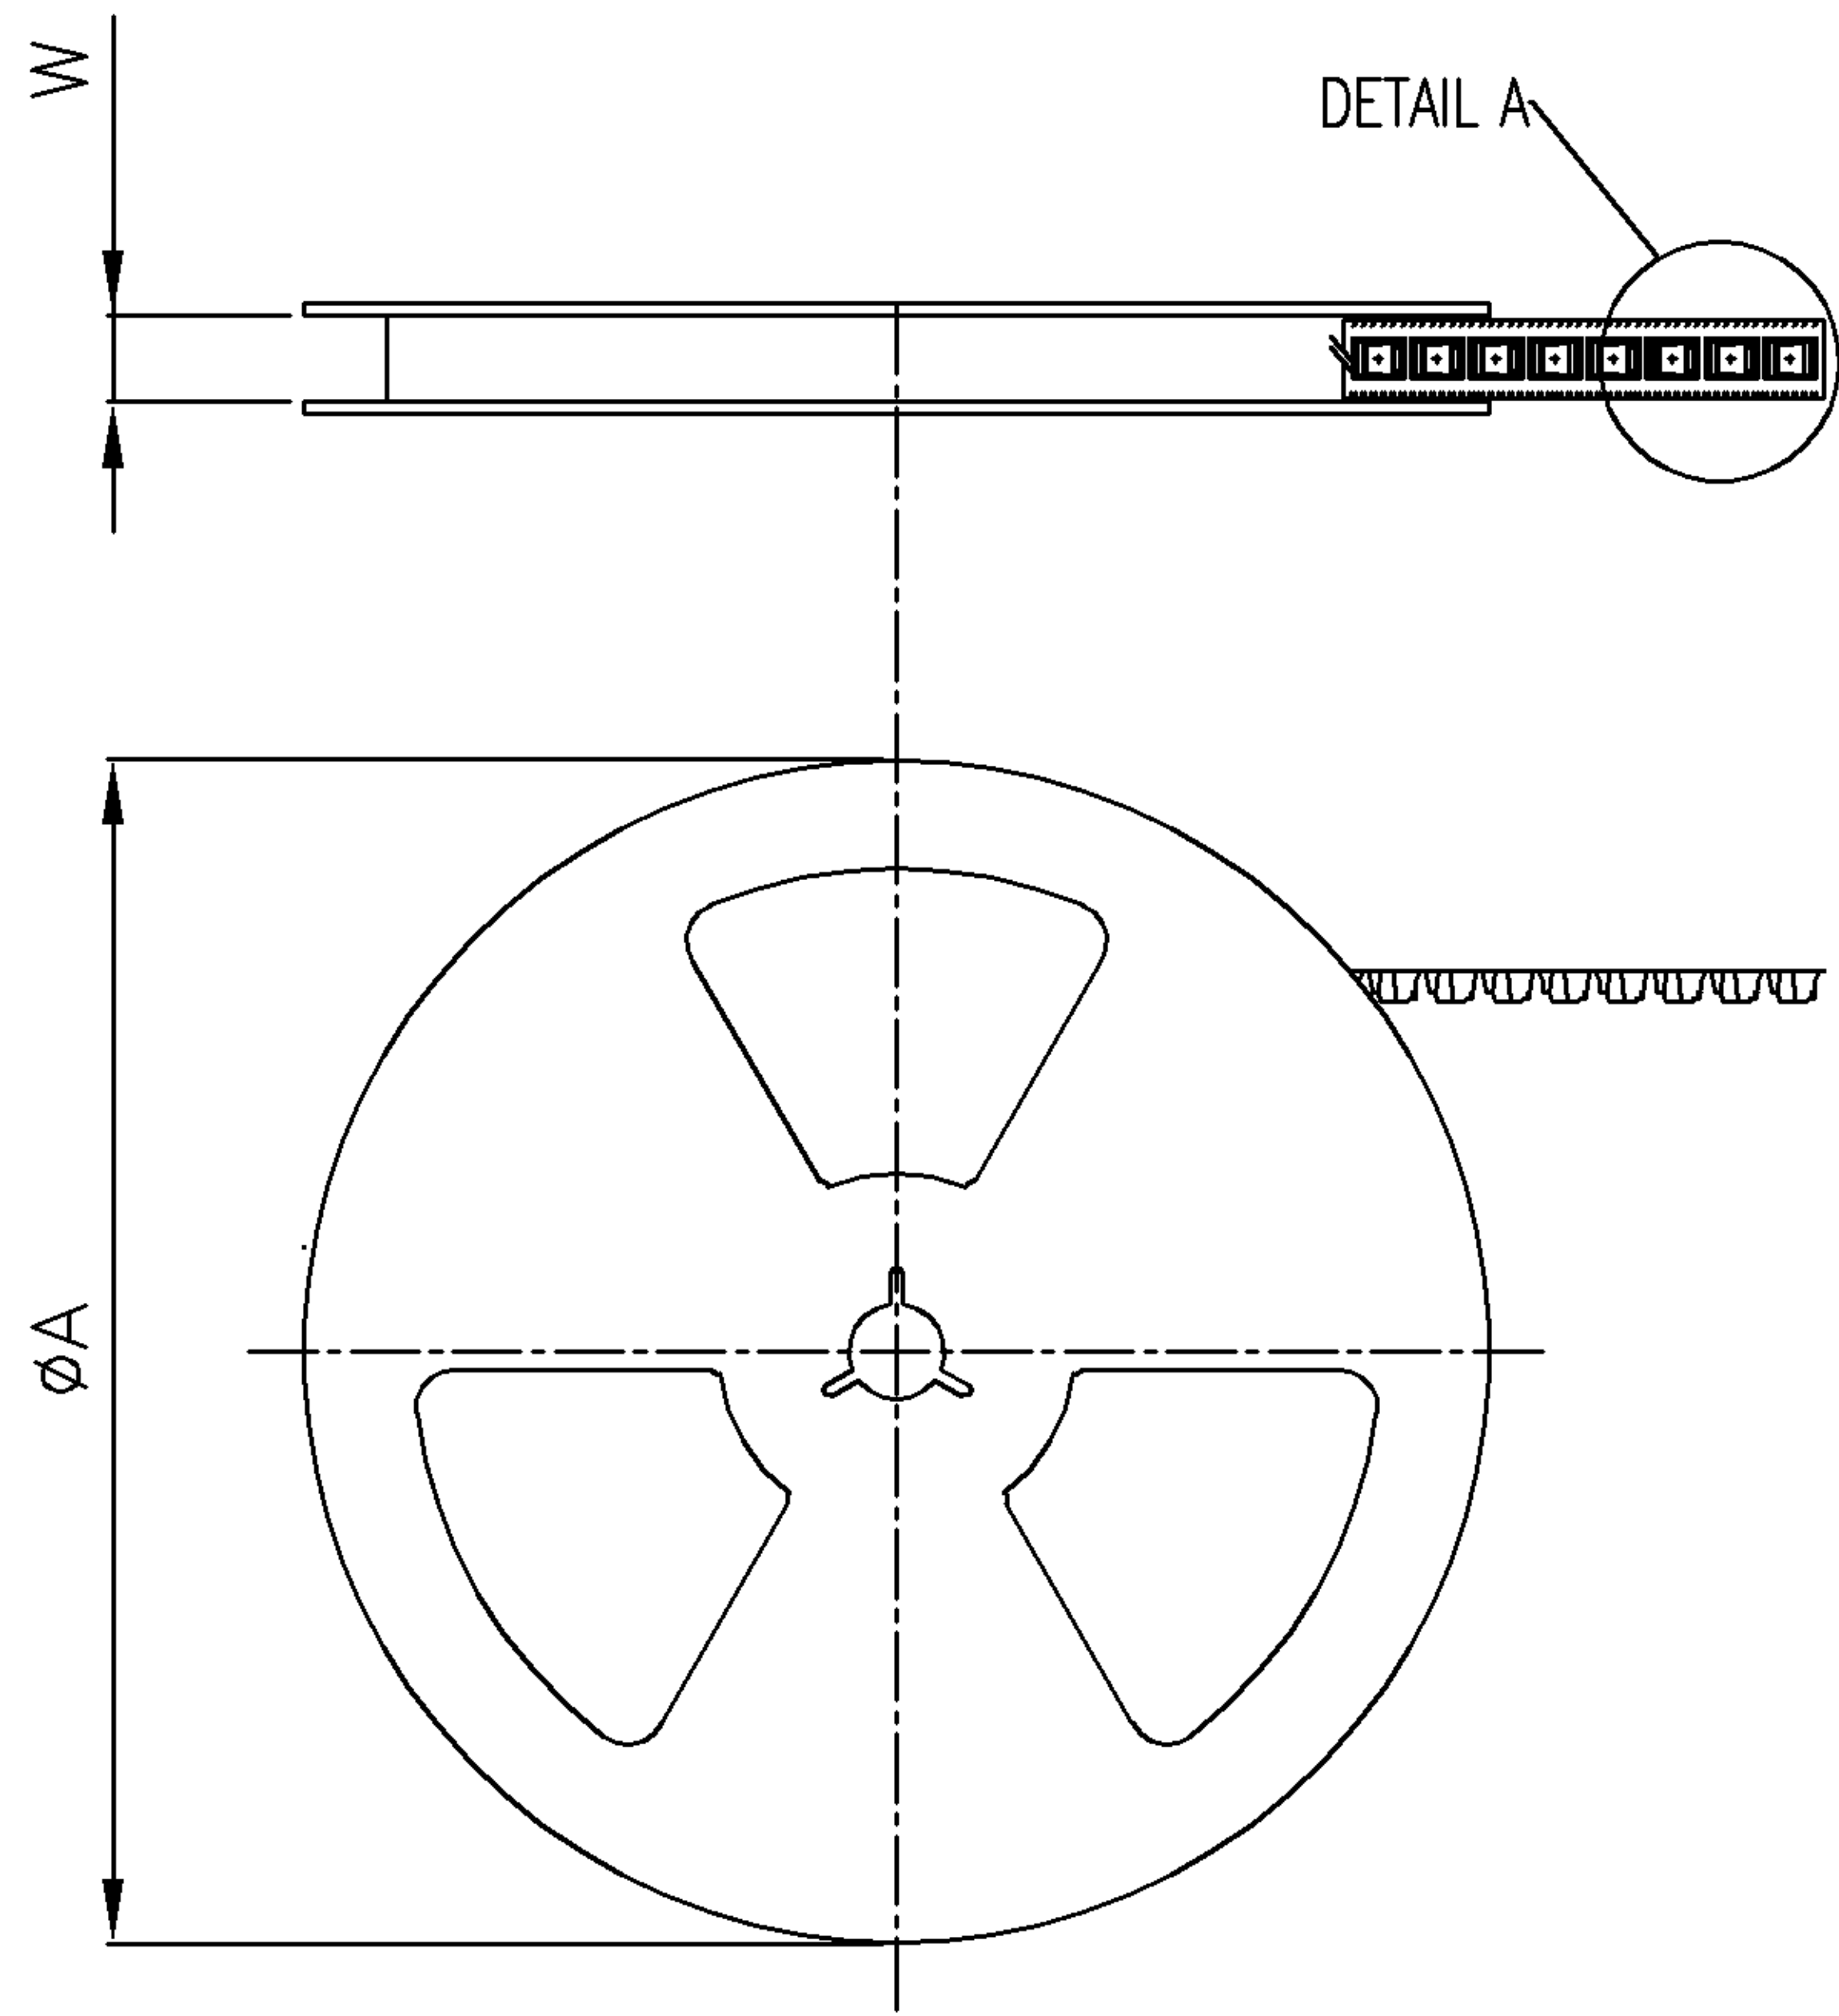

SECTION A-A

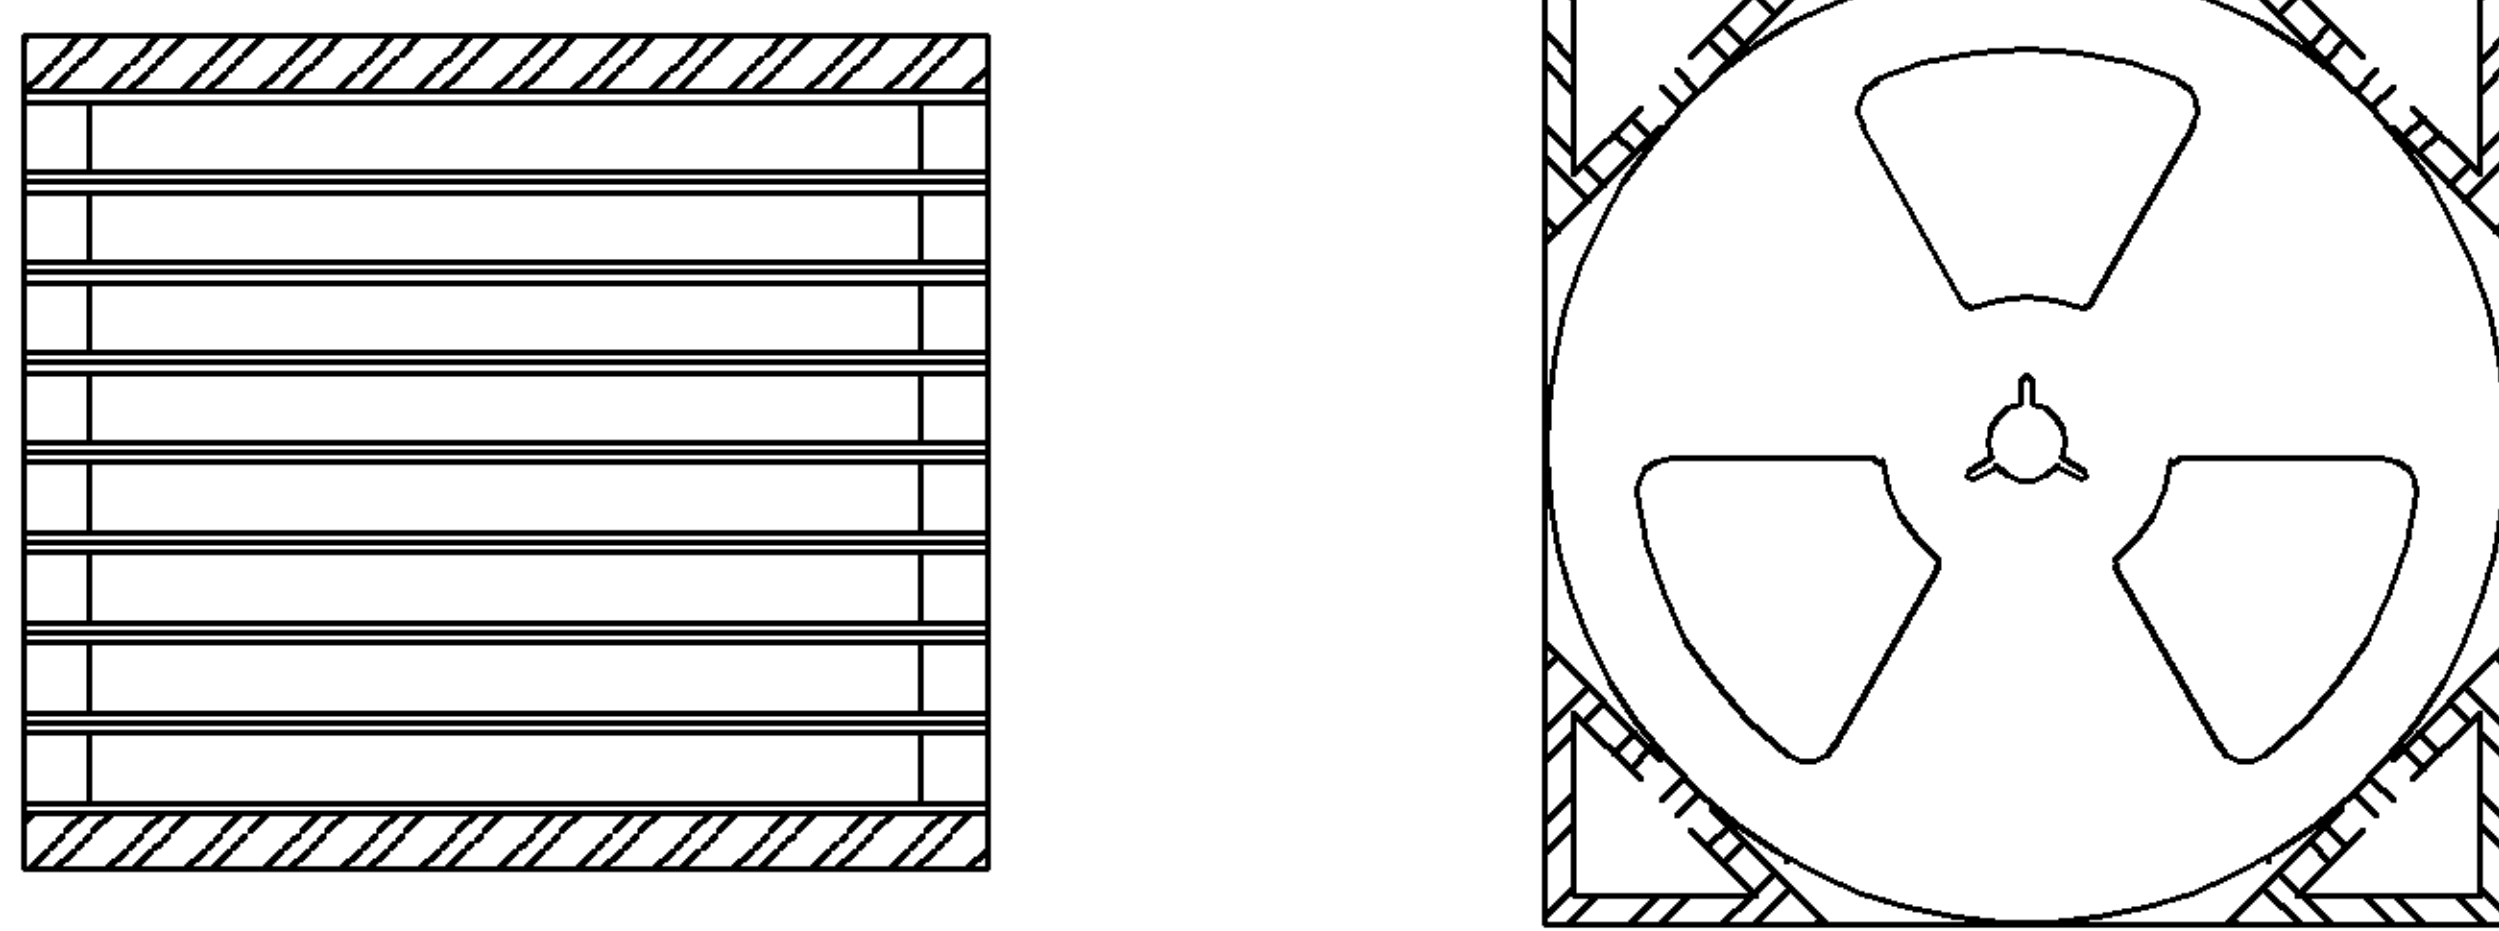

PACKING BOX

- NOTE:
- MATERIAL:
EMBOSSED CARRIER :PS .
COVER TAPE : PET.
SHIPPING CARTON : CORRUGATED FIBERBOARD.
 - DIMENSION:
REEL : W=32, $\phi A=330$ mm.
SHIPPING CARTON : L=348, W=348, H=340mm.
 - QUANTITY:
PRIMARY PACKING : 200 PCS/REEL.
SECONARY PACKING : 8 REEL/CARTON(1,600PCS).
 - WEIGHT:
NET WEIGHT : 9.5kg.
GROSS WEIGHT : 10.5kg.
 - PEELING RESISTANCE :10gf ~130gf
 - PEELING SPEED : 300 mm/minutes.

SEE SHEET 1.	ECN	DWN	CHK	DATE
LTR	REVISION RECORD			

TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± ANGLES ±	DWN O. HU 25-MAY-2005	tyco Electronics TYCO HOLDINGS (BERMUDA) VII LTD. TAIWAN BRANCH				
	CHK S. HOU 25-MAY-2005					
MATERIAL SEE SHEET 1.	APVD W.J. KE 25-MAY-2005	NAME SOCKET ASSEMBLY, RIGHT ANGLE 6 POS. FLAT SMT, IEEE 1394				
	PRODUCT SPEC					
FINISH SEE SHEET 1.	QUALIFICATION TEST REPORT	LOC DW	SIZE A ₃	DRAWING NO C-1734368		REV 0
	WEIGHT	SCALE --		SHEET 3 OF 3		



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331