
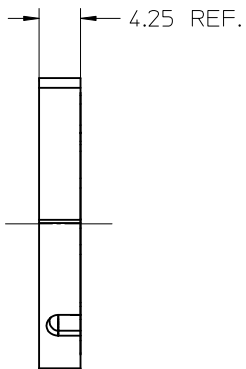
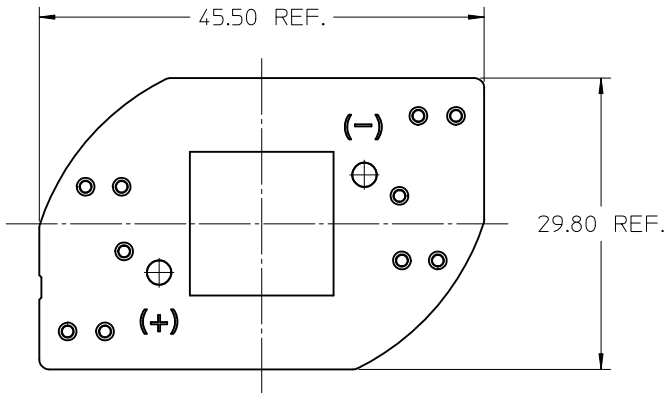
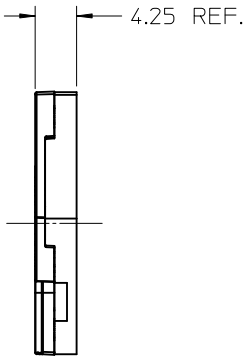
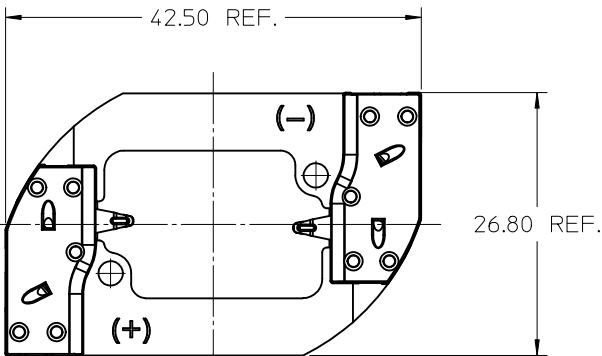



PART NUMBER	DESCRIPTION
180250-0000	ILLUMITEX 500 LED HOLDER WITHOUT COVER
180250-0001	ILLUMITEX 500 LED HOLDER WITH COVER






- NOTES:
- MATERIALS:
 - CAPS: NATURAL COLOR PA66 NYLON 25% GF UL94V-0
 - HOUSING: NATURAL COLOR PA66 NYLON 25% GF UL94V-0
 - COVER: NATURAL COLOR PA66 NYLON 25% GF UL94V-0
 - WIRE TRAP TERMINALS: COPPER ALLOY
 - FINISH: GOLD OVER NICKEL
 - THIS PRODUCT IS ELV AND ROHS COMPLIANT
 - APPLICABLE WIRE GAUGE - 20 AWG
 - SOLID WIRE IS RECOMMENDED
 - IF STRANDED WIRE IS USED, PRE-TINNED IS RECOMMENDED
 - 1 cm STRIP LENGTH IS RECOMMENDED
 - MOUNT HOLDER USING M2 SCREWS (2), 0.8 NEWTON METERS MAX TORQUE
 - FOR POTTED APPLICATIONS, THE ENCAPSULANT MUST NOT ENTER THE WIRE TRAP OR CONTACT BEAM CAVITIES. ENCAPSULANT IN THESE AREAS MAY PREVENT ELECTRICAL CONTACT
 - UL RECOGNIZED TO UL496
 - UL RECOGNIZED TO CSA-C22.2 NO. 43 (2008)
 - RATED 600V
 - UL FILE NUMBER E345583, UL-OLFB2

ENTER DESCRIPTION EC NO: SSL2012-0041 DRAWN: FJAKL IC 2011/11/01 CHKD: APPR: DMCGOWAN 2011/11/02 A1	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
		▽_A=0 ▽_C=0 ▽_P=0		mm	INCH	DRAWN BY	DATE	TITLE ILLUMITEX 500 LED HOLDER				
			4 PLACES	± ---	± ---	FJAKL IC	2011/06/08					
			3 PLACES	± ---	± ---	CHECKED BY	DATE					
			2 PLACES	± 0.13	± ---	APPROVED BY		DATE	MOLEX MOLEX INCORPORATED			
			1 PLACE	± 0.25	± ---							
			ANGULAR ± 1/2°		DMCGOWAN		2011/06/21		MOLEX MOLEX INCORPORATED			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		DOCUMENT NO.		SHEET NO.						
		SIZE B		SEE CHART		SD-180250-001		1 OF 2				
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												

WIRE TRAP CAPS REMOVED FROM FRONT VIEW FOR CLARITY




LED HOLDER PART NUMBER 180250-0000

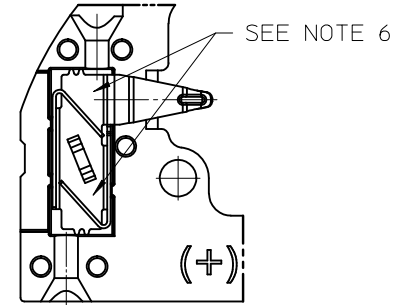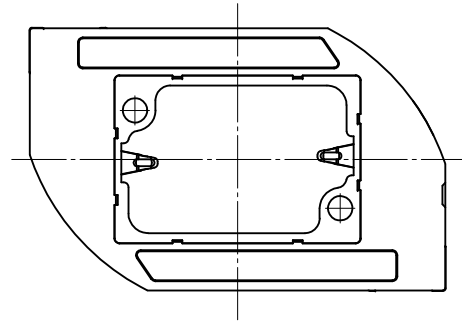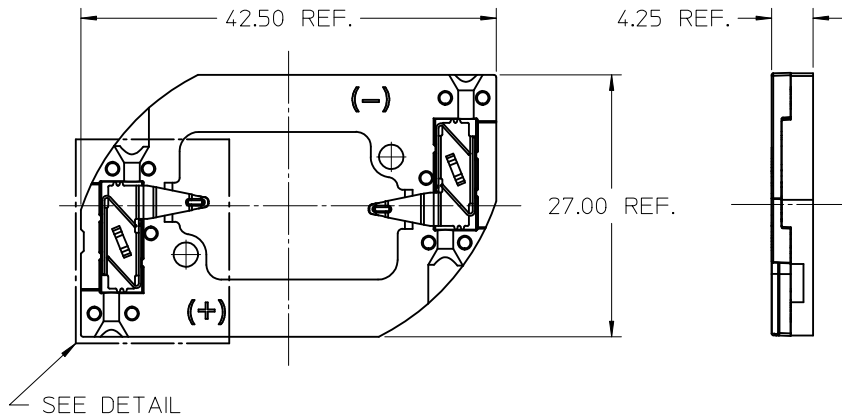

VIEW OF TWO-WAY WIRE TRAP
WIRE TRAPS ACCOMMODATE 20 GAUGE WIRE

DETAIL SCALE 3:1

LED HOLDER WITH COVER PART NUMBER 180250-0001

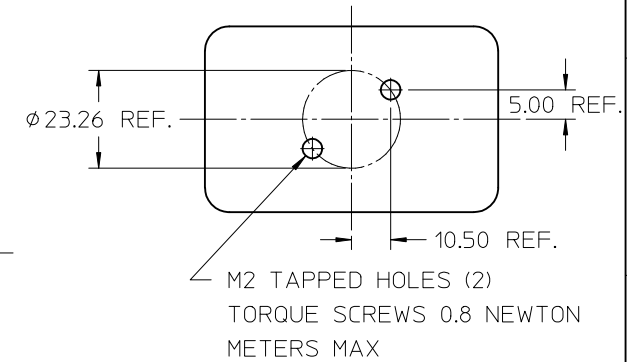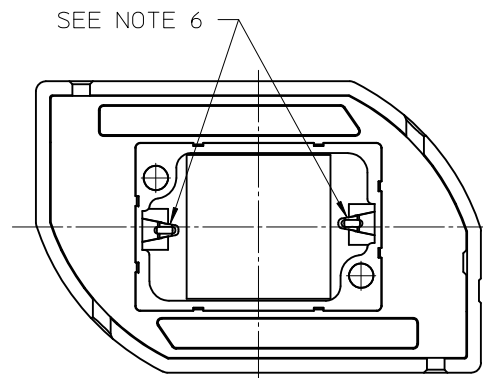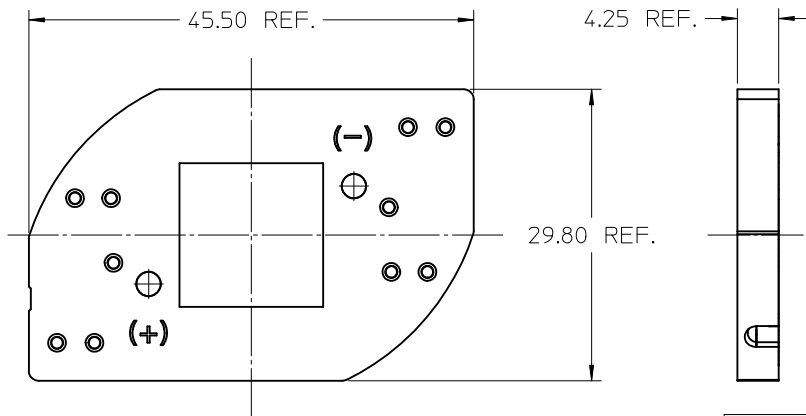

RECOMMENDED MOUNTING DIMENSIONS (NTS)

ENTER DESCRIPTION EC NO: SSL2012-0041 DRAWN: FJAKL IC CHKD: JAKL IC APPR: DMCGOWAN REV		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION					
		FA=0 FB=0 FC=0			DRAWN BY	DATE	TITLE ILLUMITEX 500 LED HOLDER								
			4 PLACES	± ---	± ---	FJAKL IC							2011/06/08		
			3 PLACES	± ---	± ---	CHECKED BY	DATE								
			2 PLACES	± 0.13	± ---	APPROVED BY DMCGOWAN		DATE 2011/06/21		MOLEX INCORPORATED					
			1 PLACE	± 0.25	± ---										
			ANGULAR ±1/2°			MATERIAL NO.		DOCUMENT NO.							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
			SEE CHART		SD-180250-001										
A1								SHEET NO. 2 OF 2							



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331