

High Voltage Rectifiers

$$V_{RRM} = 3200 \text{ V}$$

$$I_{F(AV)M} = 22.9 \text{ A}$$

V_{RRM} V	Standard Types	Power Designation
3200	UGE 0421 AY4	Si-E 1125 / 500-6



Symbol	Conditions	Ratings	
$I_{F(RMS)}$ $I_{F(AV)M}$	air self cooling, $T_{amb} = 45^{\circ}\text{C}$	40	A
	- without cooling plate	7.4	A
	- with colling plate	10.9	A
	forced air cooling: $v = 3 \text{ m/s}$, $T_{amb} = 35^{\circ}\text{C}$		
	- without cooling plate	14.2	A
	- with cooling plate	18.8	A
	oil cooling, $T_{amb} = 35^{\circ}\text{C}$		
	- without cooling plate	19.7	A
	- with cooling plate	22.9	A
P_{RSM}	$T_{(vj)} = 150^{\circ}\text{C}$; $t_p = 10 \mu\text{s}$	7	kW
I_{FSM}	non repetitive, 50 c/s (for 60 c/s add 10%) $T_{(vj)} = 45^{\circ}\text{C}$; $t_p = 10 \text{ ms}$	300	A
	$T_{(vj)} = 150^{\circ}\text{C}$; $t_p = 10 \text{ ms}$	250	A
T_{amb}		-40...+150	$^{\circ}\text{C}$
T_{stg}		-40...+150	$^{\circ}\text{C}$
$T_{(vj)}$		150	$^{\circ}\text{C}$
Weight		115	g

Features

- Hermetically sealed Epoxy
- Use in oil
- Avalanche characteristics

Applications


- X-Ray equipment
- Electrostatic dust precipitators
- Electronic beam welding
- Lasers
- Cable test equipment

Advantages

- Simple mounting
- Improved temperature and power cycling
- Reduced protection circuits
- Series and parallel operation

Symbol	Conditions	Characteristic Values	
I_R	$T_{(vj)} = 150^{\circ}\text{C}$; $V_R = V_{RRM}$	≤ 2	mA
V_F	$I_F = 55 \text{ A}$ $T_{(vj)} = 25^{\circ}\text{C}$	2.72	V
V_{TO}	$T_{(vj)} = 150^{\circ}\text{C}$	1.7	V
r_T	$T_{(vj)} = 150^{\circ}\text{C}$	16	m Ω
a	$f = 50\text{Hz}$	5 x 9,81	m/s ²
M_d		8	Nm

Dimensions in mm (1 mm = 0.0394")

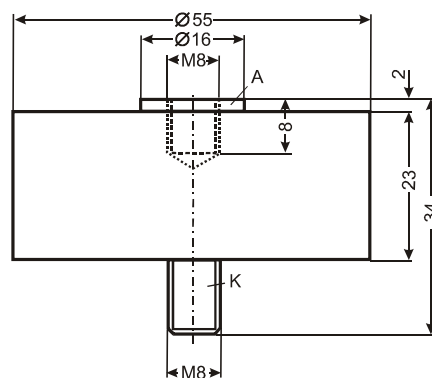

Data according to IEC 60747-2
IXYS reserve the right to change limits, test conditions and dimensions.

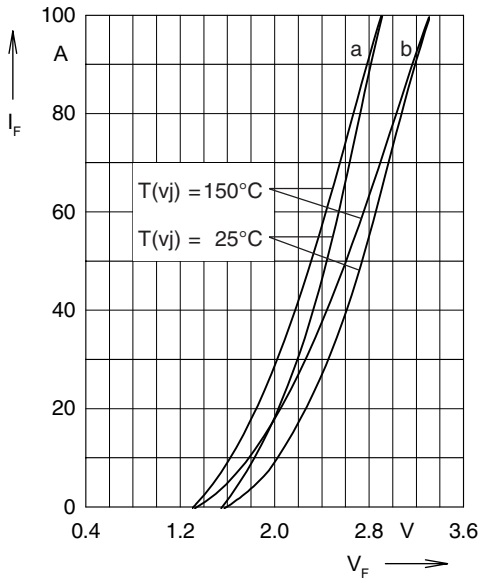


Fig. 1: **Forward characteristics**

Instantaneous forward current I_F as a function of instantaneous forward voltage drop V_F for junction temperature $T_{(vj)} = 25^\circ\text{C}$ and $T_{(vj)} = 150^\circ\text{C}$
 a = Mean value characteristic
 b = Limit value characteristic

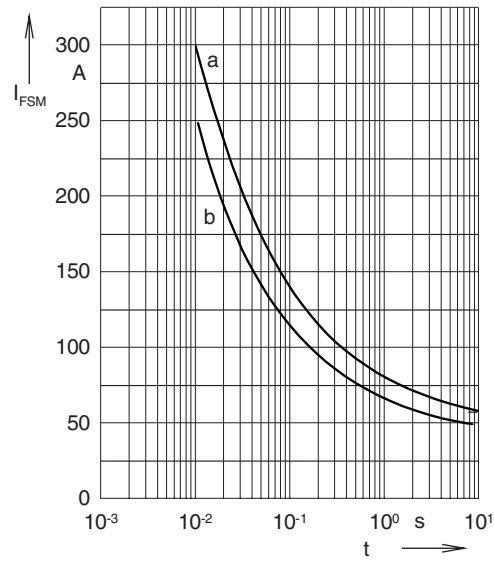


Fig. 2: **Characteristics of maximum permissible current**

The curves show the non repetitive peak one cycle surge forward current I_{FSM} as a function of time t and serve for rating protective devices.

a = Initial state $T_{(vj)} = 45^\circ\text{C}$
 b = Initial state $T_{(vj)} = 150^\circ\text{C}$

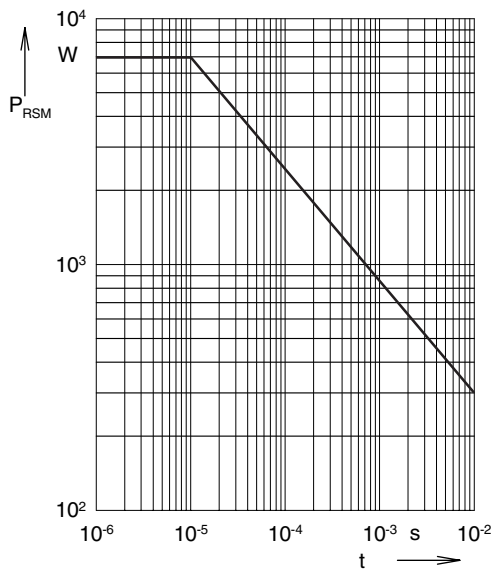


Fig. 3: **Power loss**

Non repetitive peak reverse power loss P_{RSM} as a function of time t , $T_{(vj)} = 150^\circ\text{C}$

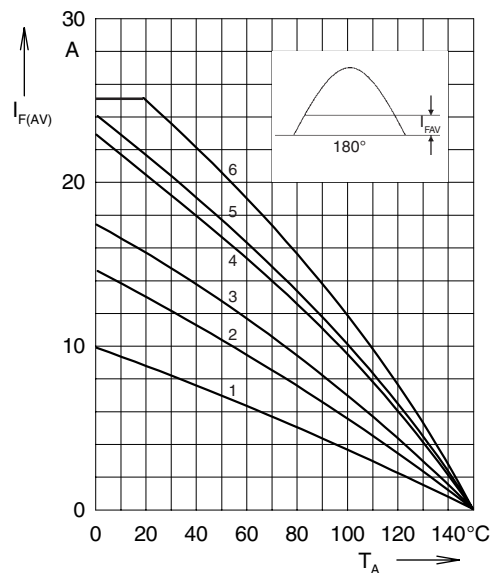


Fig. 4: **Load diagramm**

Mean forward current $I_{F(AV)}$ of one module for a sine half wave for various cooling modes as a function of the cooling medium temperature T_{amb} for a resistive load (horizontal mounting).

Cooling modes

- | | | |
|------------------------|---------|---------------|
| 1 = air self cooling | without | cooling plate |
| 2 = air self cooling | with | cooling plate |
| 3 = forced air cooling | without | cooling plate |
| 4 = forced air cooling | with | cooling plate |
| 5 = oil cooling | without | cooling plate |
| 6 = oil cooling | with | cooling plate |



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331