


**Description**

- Temperature compensated voltage controlled crystal oscillator (TCVCXO)
- Model IQXT-210-3
- Model Issue number 2

**Frequency Parameters**

- Frequency 10.0MHz
- Frequency Tolerance  $\pm 0.50$ ppm
- Tolerance Condition @ 25°C, 3.3V & VC=1.5V
- Frequency Stability  $\pm 0.14$ ppm
- Operating Temperature Range -40.00 to 85.00°C
- Ageing  $\pm 0.02$ ppm max per day,  $\pm 1$ ppm max per year
- Frequency Tolerance (measurement referenced to frequency observed with TA=25°C, Vs=3.3V, VC=1.5V and within 30 days after ex-works)
- Frequency Stability: TA varied across the operating temperature range, measurement referenced to frequency observed with TA=25°C, Vs=3.3V, VC=1.5V, load=15pF and temperature variable speed less than 2°C per minute.
- Ageing: TA=25°C, Vs=3.3V, VC=1.5V and after 1hr of operation.
- Supply Voltage Variation (measurement referenced to frequency observed with TA=25°C, Vs varied from 3.13V to 3.47V, VC=1.5V and load=15pF):  $\pm 0.1$ ppm max
- Load Variation (5% load change measurement referenced to frequency observed with TA=25°C, Vs=3.3V, VC=1.5V and load=15pF):  $\pm 0.1$ ppm max
- Short Term Stability (@ 25°C after 10mins power on): 5E-10/s typ @ 10MHz

**Electrical Parameters**

- Supply Voltage 3.3V  $\pm 5\%$
- Current Draw 10.00mA
- Current: TA=25°C, Vs=3.3V, VC=1.5V and load=15pF

**Frequency Adjustment**

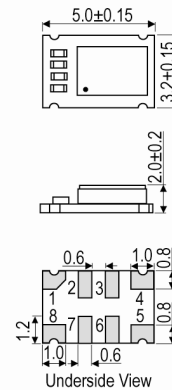
- Pulling  $\pm 10$ ppm to  $\pm 15$ ppm
- Control Voltage 1.5V  $\pm 1.5$ V
- Linearity:  $\pm 10\%$  max
- Slope: Positive
- Input Impedance: 100k $\Omega$  min

**Output Details**


- Output Compatability HCMOS
- Drive Capability 15pF
- Rise and Fall Time 8.0ns max
- Duty Cycle 45/55%
- Output Low (@ Vs=3.3V, load=15pF): 0.4V max
- Output High (@ Vs=3.3V, load=15pF): 2.4V min

**Noise Parameters**

- Phase Noise (@ 10MHz typ):
  - 90dBc/Hz @ 10Hz
  - 115dBc/Hz @ 100Hz
  - 135dBc/Hz @ 1kHz
  - 145dBc/Hz @ 10kHz
  - 148dBc/Hz @ 100kHz
  - 150dBc/Hz @ 1MHz

**Outline (mm)**

**Pad Connections**

1. Voltage Control
2. N/C
3. N/C
4. GND
5. Output
6. N/C
7. N/C
8. +Vs

**Solder Pad Layout**

**Sales Office Contact Details:**

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

**Environmental Parameters**

- Storage Temperature Range: -55 to 105°C
- ESD Level:  
HBM, Class 2: 2000V to 4000V, JEDEC JS-001-2010  
Machine Model, Class B: 200V to 400V, JEDEC JS-001-2010
- Shock: IEC 60068-2-27, Test Ea: 100G acceleration for 6ms, half sinewave, in 3 mutually perpendicular planes
- Vibration: IEC 60068-2-6, Test Fc: 10Hz-2000Hz, 0.75mm amplitude, 10G acceleration, 30mins per cycle, in 3 mutually perpendicular planes, test duration 2hrs

**Manufacturing Details**

- Moisture Sensitivity Level: 2
- Maximum Reflow Temperature: 260°C (30secs max)

**Compliance**

- RoHS Status (2011/65/EU)      Compliant
- REACH Status                      Compliant
- MSL Rating (JDEC-STD-033):    2

**Packaging Details**

- Pack Style: Bulk      Loose in bulk pack  
Pack Size: 1
- *Alternative packing option available*

---

**Sales Office Contact Details:**

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)



## Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

### Наши контакты:

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331