



REVISIONS				DATE	APPROVED
ZONE	LTR	DESCRIPTION			
	Y	REV PER OG3C-0166-02		25JUN02	MM
	Y1	REVISED PER -ECO-09-026444		27NOV09	KK AEG

PART NO	NO. OF POS	A	B	F	G
583660-1	36	.156	5.460	5.772	6.248
-2	15		2.184	2.496	2.942
-3	3		.312	.624	1.070
-4	4		.468	.780	1.226
-5	5		.624	.936	1.382
-6	6		.780	1.092	1.538
-7	7		.936	1.248	1.694
-8	8		1.092	1.404	1.850
-9	9		1.248	1.560	2.006
1-583660-0	10		1.404	1.716	2.162
1-1	11		1.560	1.872	2.318
1-2	12		1.716	2.028	2.474
1-3	13		1.872	2.184	2.630
1-4	14		2.028	2.340	2.786
1-5	15		2.340	2.652	3.098
1-6	17		2.496	2.808	3.254
1-7	18		2.652	2.964	3.410
1-8	19		2.808	3.120	3.566
1-9	20		2.964	3.276	3.722
2-583660-0	21		3.120	3.432	3.878
2-1	22		3.276	3.588	4.034
2-2	23		3.432	3.744	4.190
2-3	24		3.588	3.900	4.346
2-4	25		3.744	4.056	4.502
2-5	26		3.900	4.212	4.658
2-6	27		4.056	4.368	4.814
2-7	28		4.212	4.524	4.970
2-8	29		4.368	4.680	5.126
2-9	30		4.524	4.836	5.282
3-583660-0	31		4.680	4.992	5.438
3-1	32		4.836	5.148	5.594
3-2	33		4.992	5.304	5.750
3-3	34		5.148	5.460	5.906
3-4	35		5.304	5.616	6.062
3-5	37		5.616	5.928	6.374
3-6	38		5.772	6.084	6.530
3-7	39		5.928	6.240	6.686
3-8	40		6.084	6.396	6.842
3-9	41		6.240	6.552	6.998
4-583660-0	42		6.396	6.708	7.154
4-1	43		6.552	6.864	7.310
4-2	44		6.708	7.020	7.466
4-3	45		6.864	7.176	7.622
4-4	46		7.020	7.332	7.778
4-5	47		7.176	7.488	7.934
4-6	48		7.332	7.644	8.090
4-7	49		7.488	7.800	8.246
4-583660-8	50	.156	7.644	7.956	8.402


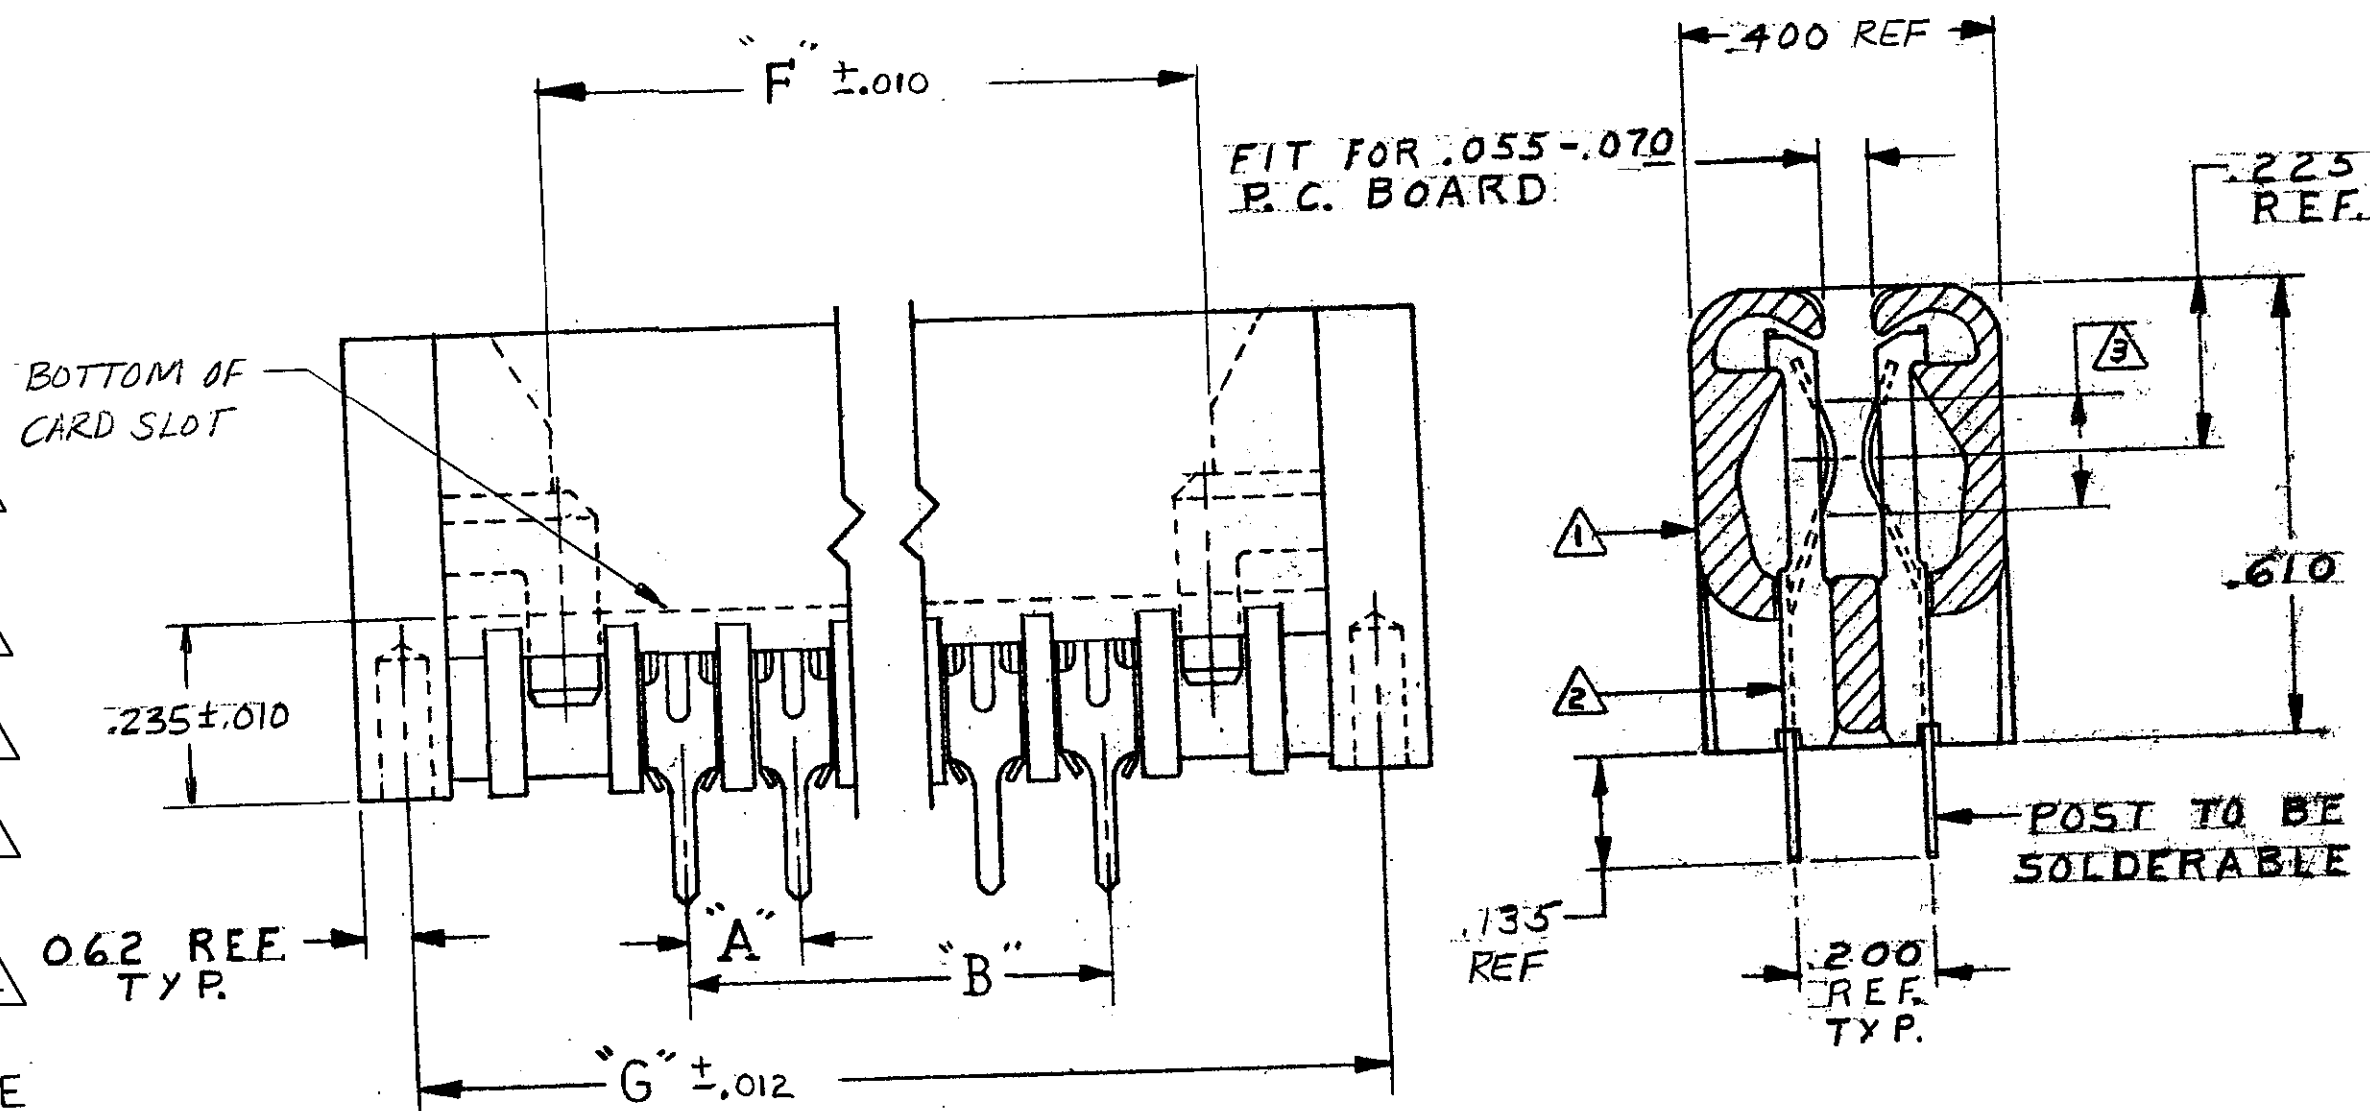


- ① GLASS FILLED POLYESTER, COLOR-BLACK
② PHOSPHOR BRONZE
③ .000015 GOLD, SELECTIVE
④ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES TOLERANCES ON: DECIMALS ±.005 ANGLES ±	CONTRACT NO. DR <i>Quink</i> 1-30-73 CHK <i>M. Zey</i> 2-5-73 APPD <i>Larry M Brown</i> 2-5-73 REL <i>R. G. Dunning</i> 3/13/73 DSGN APPD OTHER APPD	AMP INCORPORATED HARRISBURG, PENNSYLVANIA NAME HOUSING ASSEMBLY, TWIN LEAF, .156 Q. .010X.024, SOLDER TYPE POST, END CAP VERSION SIZE C CODE IDENT NO. 00779 NUMBER 583660 SCALE 1/8"=1" SHEET 1 OF 2 SHTS.
MATERIAL SEE CALLOUT		CUSTOMER DRAWING

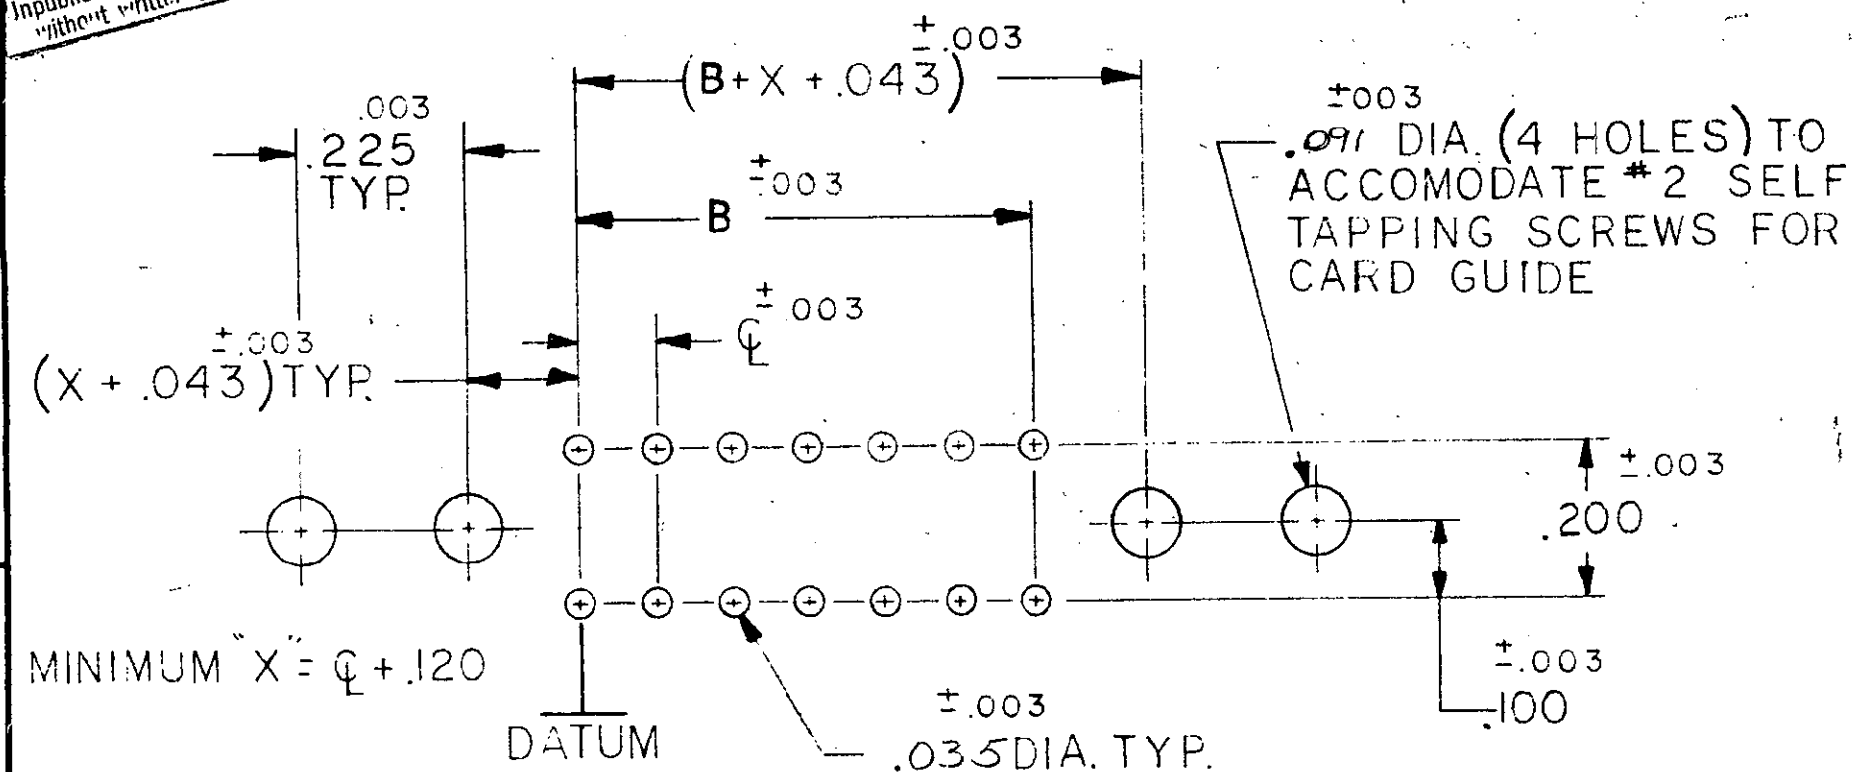

BOARD LAYOUT FOR USE WITH AMP CARD GUIDE PART NO. 583671

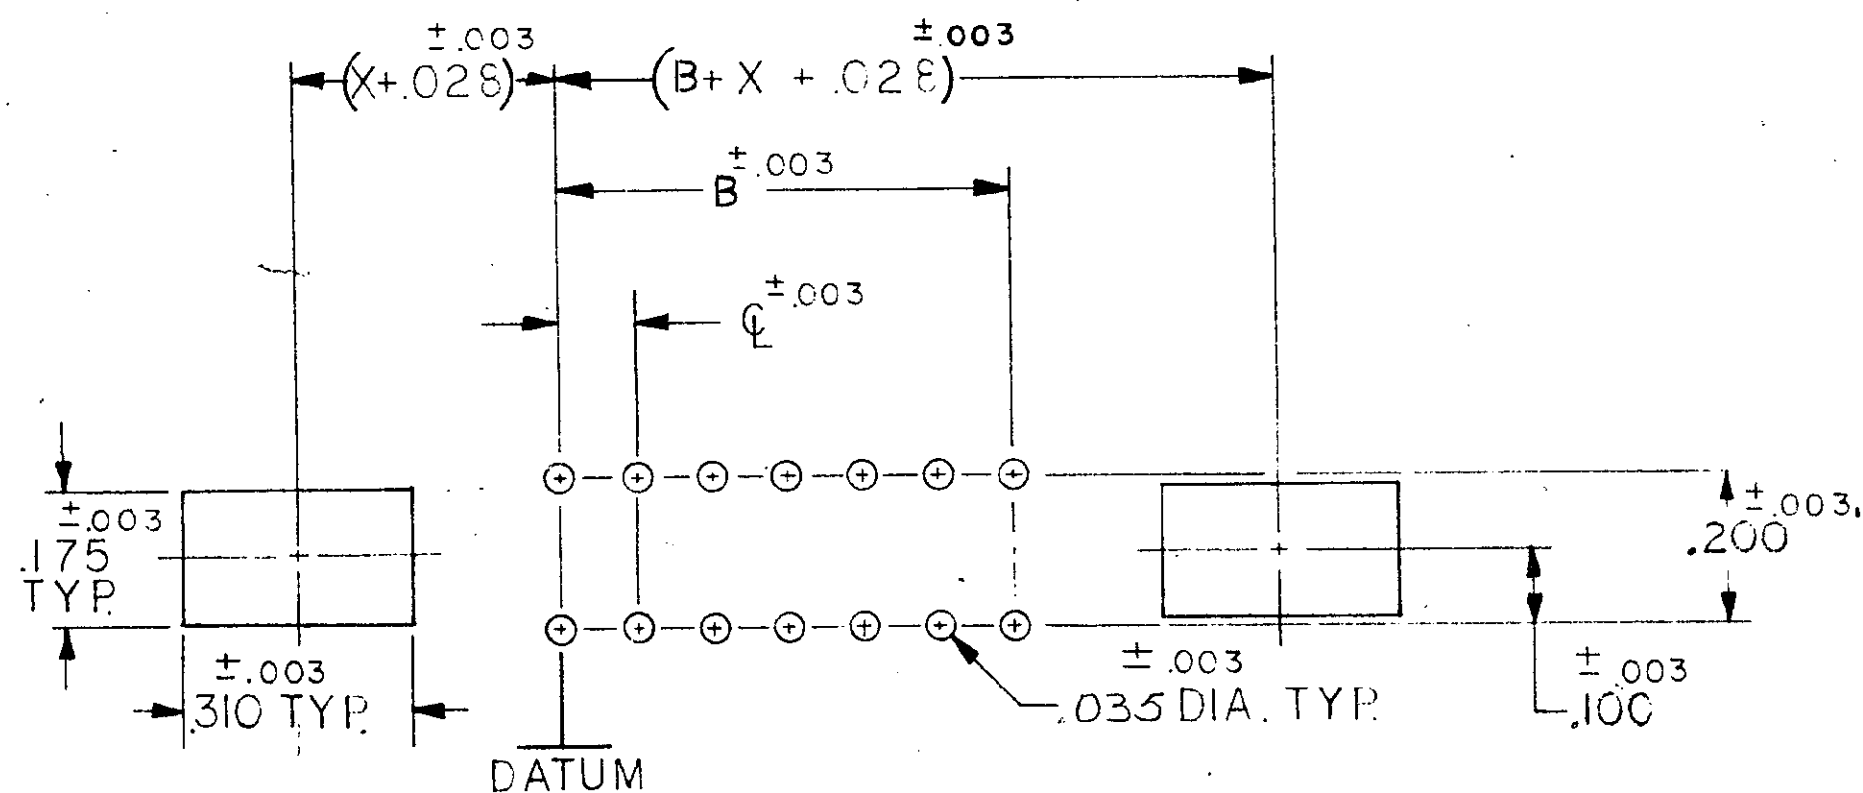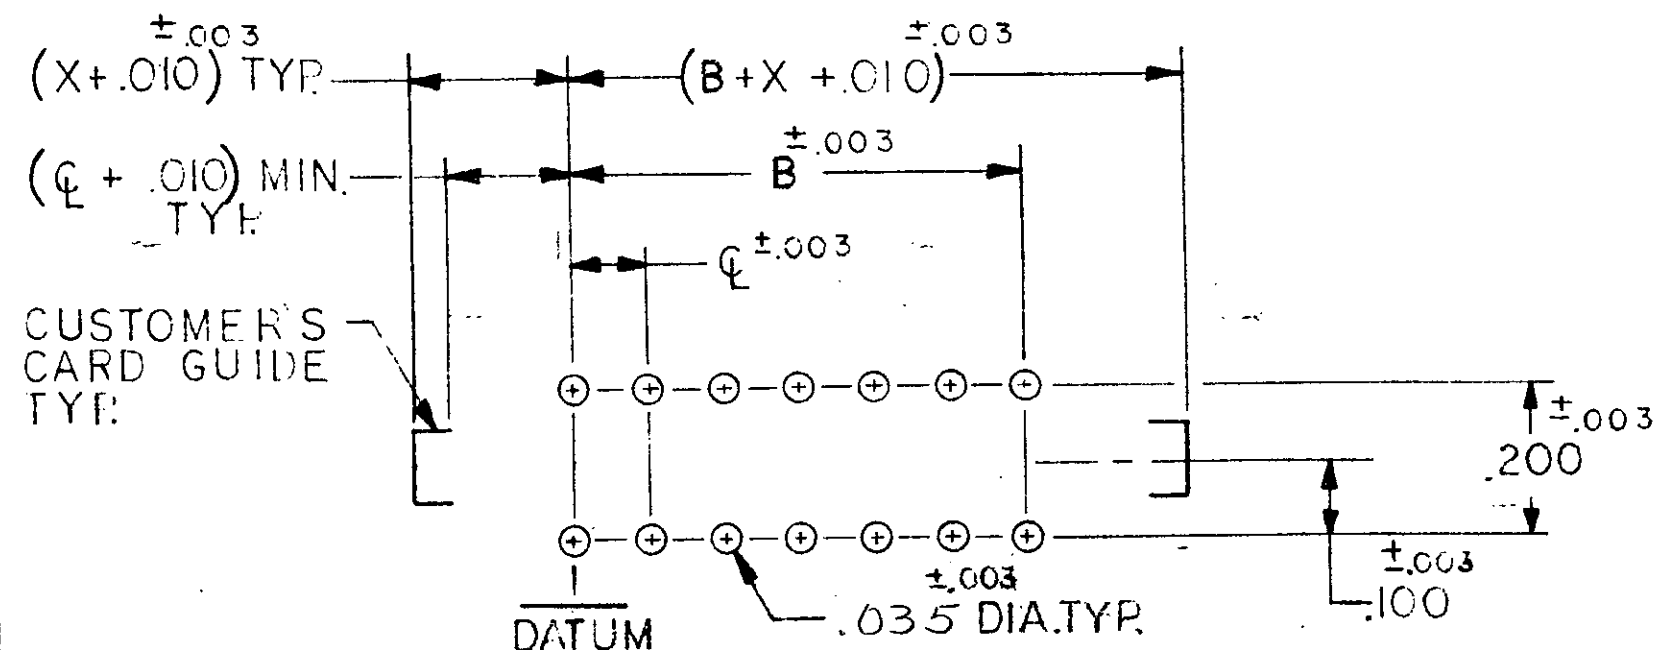BOARD LAYOUT FOR USE WITH AMP CARD GUIDE PART NO. 583408
CR 583425


BOARD LAYOUT FOR USE WITH CUSTOMER SUPPLIED CARD GUIDE

THE SLOT FOR INTER-CONTACT KEYING PLUGS MUST BE CENTERED BETWEEN THE PRINTED CIRCUIT PADS, WHILE THE SLOT FOR ON-CONTACT KEYING PLUGS MUST BE CENTERED ON THE AREA OF A PRINTED CIRCUIT PAD.


INTER-CONTACT KEYING PLUG	"R"	FOR CENTER LINE SPACING
530030-1	.050	.125-.150-.156
530030-2	.040	.100

ON CONTACT KEYING PLUG	"S"	FOR CENTER LINE SPACING
583714-1	.129	.100-.125
583714-2	.160	.150-.156

REVISIONS				
ZONE	LTR	DESCRIPTION	DATE	APPROVED
SEE SHEET 1				

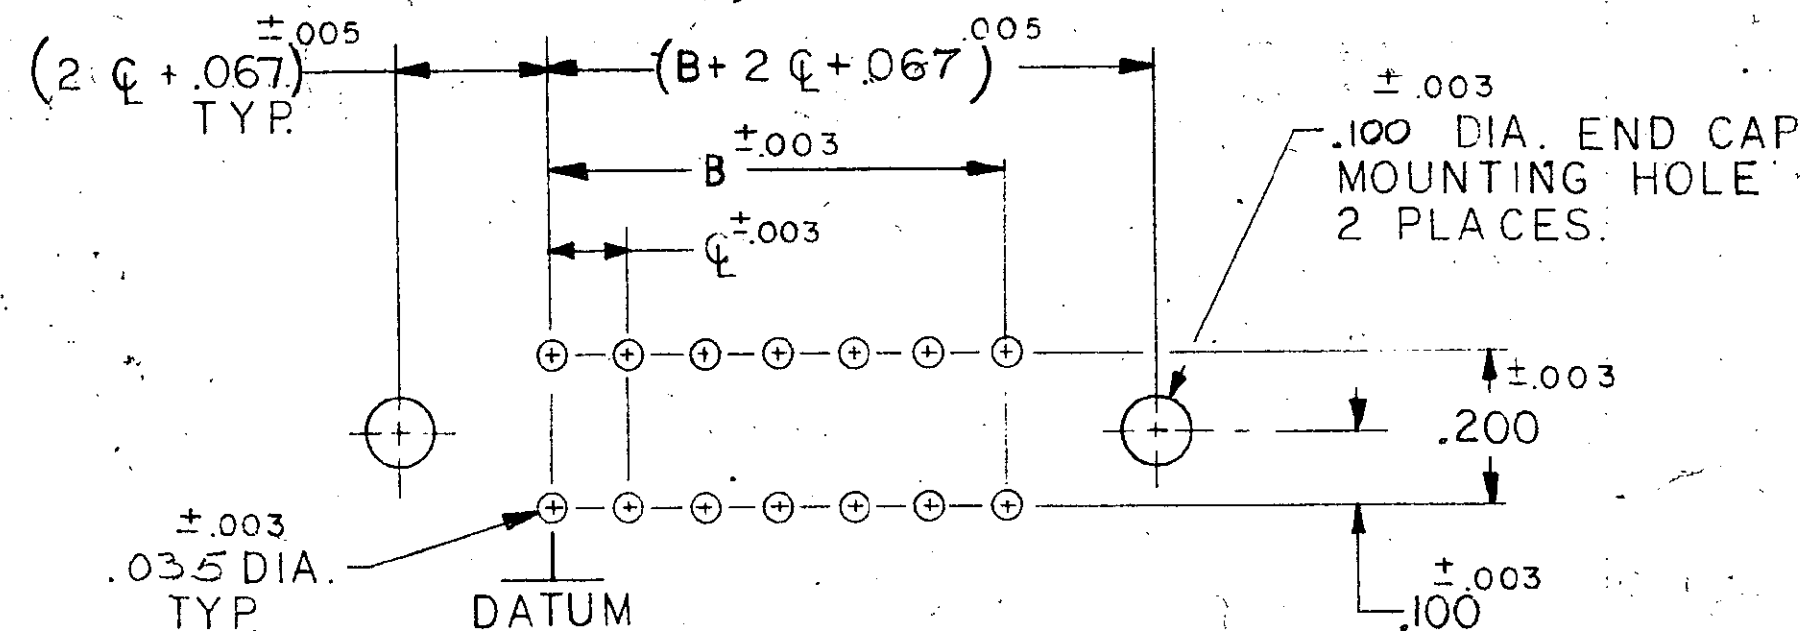

BOARD LAYOUT FOR USE WITH END CAP

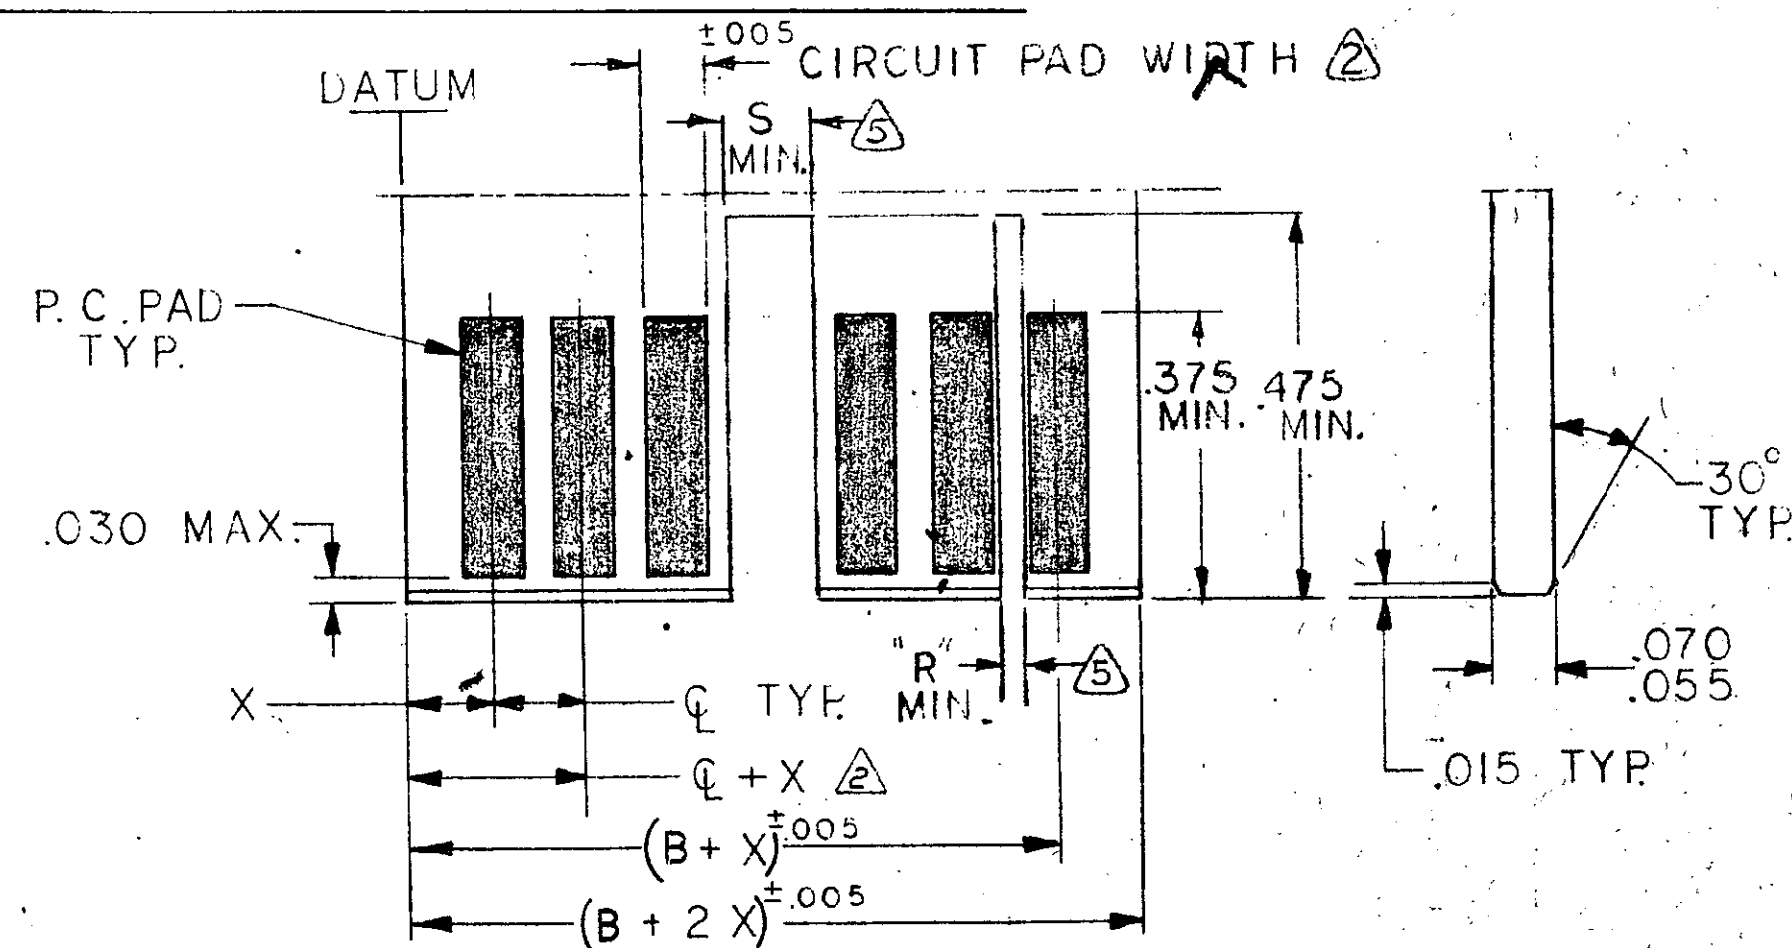

DAUGHTER BOARD LAYOUT

1. MAX. ALLOWABLE WARPAGE OF MOTHER BOARD NOT TO EXCEED .005/IN.
2. MAX. ALLOWABLE BOW OF DAUGHTER BOARD NOT TO EXCEED .010/IN.
3. THICKNESS OF MOTHER BOARD IS .062 FOR DOUBLE SLOTTED CARD GUIDES AND .104 MAX. FOR ALL OTHER MOUNTING CONDITIONS.
4. EACH PAD LOCATION INCREASES BY $C \pm .005$ WITH A NON-CUMULATIVE TOLERANCE OF $\pm .005$.
5. CIRCUIT PAD WIDTH - .045 FOR .100 C
.072 FOR .125 C
.072 FOR .150 C
.080 FOR .156 C
6. DIMENSIONS APPLY TO BOTH SIDES OF DAUGHTER BOARD.
7. 3C INCREMENTS ON MOTHER BOARD HAVE $\pm .003$ NON-CUMULATIVE TOLERANCE.
8. 4. "X" IS A CUSTOMER CONTROLLED DIMENSION EXCEPT FOR END CAP ASSEMBLIES WHERE "X" = C - .008

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES
TOLERANCES ON:
DECIMALS $\pm .005$ ANGLES $\pm$

MATERIAL

CONTRACT NO.

DR

CHK

APPD

REL

DSGN

APPD

OTHER

APPD

AMP

AMP INCORPORATED
HARRISBURG, PENNSYLVANIA

NAME

HOUSING ASSEMBLY
TWIN LEAF CONNECTOR
.156 CENTERS

SIZE

CODE IDENT NO.

NUMBER

C

00779

583660

SCALE

#

SHEET 2 OF 2 SHES.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331