

**SMALL SIGNAL COMPLEMENTARY PRE-BIASED DUAL TRANSISTOR**
**Features**

- Epitaxial Planar Die Construction
- Built-In Biasing Resistors
- Surface Mount Package Suited for Automated Assembly
- **Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**
- **Qualified to AEC-Q101 Standards for High Reliability**
- **PPAP Capable (Note 4)**

| Part Number | R1 (NOM)      | R2 (NOM)      |
|-------------|---------------|---------------|
| DCX124EU    | 22K $\Omega$  | 22K $\Omega$  |
| DCX144EU    | 47K $\Omega$  | 47K $\Omega$  |
| DCX114YU    | 10K $\Omega$  | 47K $\Omega$  |
| DCX123JU    | 2.2K $\Omega$ | 47K $\Omega$  |
| DCX114EU    | 10K $\Omega$  | 10K $\Omega$  |
| DCX143EU    | 4.7K $\Omega$ | 4.7K $\Omega$ |
| DCX143ZU    | 4.7K $\Omega$ | 47K $\Omega$  |
| DCX115EU    | 100K $\Omega$ | 100K $\Omega$ |


**Mechanical Data**

- Case: SOT363
- Case Material: Molded Plastic, "Green" Molding Compound; UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish – Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208 @3
- Weight: 0.006 grams (Approximate)

| Part Number | R1 Only       |
|-------------|---------------|
| DCX143TU    | 4.7K $\Omega$ |
| DCX114TU    | 10K $\Omega$  |

**SOT363**


Top View

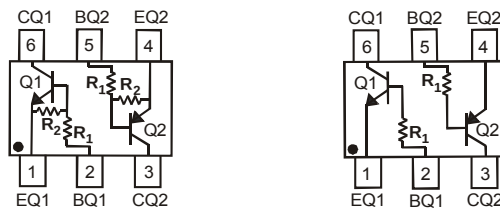

R1, R2

R1 Only

Device Schematic


**Ordering Information** (Notes 4 & 5)

| Product         | Compliance | Marking | Reel size (inches) | Tape width (mm) | Quantity per reel |
|-----------------|------------|---------|--------------------|-----------------|-------------------|
| DCX124EU-7-F    | AEC-Q101   | C17     | 7                  | 8               | 3,000             |
| DCX124EUQ-7-F   | Automotive | C17     | 7                  | 8               | 3,000             |
| DCX124EUQ-13-F  | Automotive | C17     | 13                 | 8               | 10,000            |
| DCX124EUQ-13R-F | Automotive | C17     | 13                 | 8               | 10,000            |
| DCX144EU-7-F    | AEC-Q101   | C20     | 7                  | 8               | 3,000             |
| DCX144EU-7R-F   | AEC-Q101   | C20     | 7                  | 8               | 3,000             |
| DCX144EUQ-7-F   | Automotive | C20     | 7                  | 8               | 3,000             |
| DCX114YU-7-F    | AEC-Q101   | C14     | 7                  | 8               | 3,000             |
| DCX114YUQ-7-F   | Automotive | C14     | 7                  | 8               | 3,000             |
| DCX114YUQ-13-F  | Automotive | C14     | 13                 | 8               | 10,000            |
| DCX114YUQ-13R-F | Automotive | C14     | 13                 | 8               | 10,000            |
| DCX123JU-7-F    | AEC-Q101   | C06     | 7                  | 8               | 3,000             |
| DCX123JUQ-7-F   | Automotive | C06     | 7                  | 8               | 3,000             |
| DCX114EU-7-F    | AEC-Q101   | C13     | 7                  | 8               | 3,000             |
| DCX114EU-13R-F  | AEC-Q101   | C13     | 13                 | 8               | 10,000            |
| DCX114EUQ-7-F   | Automotive | C13     | 7                  | 8               | 3,000             |
| DCX114EUQ-13-F  | Automotive | C13     | 13                 | 8               | 10,000            |
| DCX114EUQ-13R-F | Automotive | C13     | 13                 | 8               | 10,000            |
| DCX143TU-7-F    | AEC-Q101   | C07     | 7                  | 8               | 3,000             |
| DCX143EU-7-F    | AEC-Q101   | C08     | 7                  | 8               | 3,000             |
| DCX114TU-7-F    | AEC-Q101   | C12     | 7                  | 8               | 3,000             |
| DCX143ZU-7-F    | AEC-Q101   | C02     | 7                  | 8               | 3,000             |
| DCX115EU-7-F    | AEC-Q101   | C01     | 7                  | 8               | 3,000             |

- Notes:
1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS) & 2011/65/EU (RoHS 2) compliant.
  2. See [http://www.diodes.com/quality/lead\\_free.html](http://www.diodes.com/quality/lead_free.html) for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
  3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
  4. Automotive products are AEC-Q101 qualified and are PPAP capable. Automotive, AEC-Q101 and standard products are electrically and thermally the same, except where specified. For more information, please refer to [http://www.diodes.com/quality/product\\_compliance\\_definitions/](http://www.diodes.com/quality/product_compliance_definitions/).
  5. -7R and -13R are parts rotated in the pocket tape by +180°. For packaging details, go to our website at <http://www.diodes.com/products/packages.html>.

## Marking Information

SOT363



CXX = Product Type Marking Code  
 YM = Date Code Marking  
 Y = Year (ex: X = 2010)  
 M = Month (ex: 9 = September)

### Date Code Key

| Year | 2010 | 2011 | 2012 | 2013 | 2014 | 2015 | 2016 | 2017 | 2018 | 2019 | 2020 |
|------|------|------|------|------|------|------|------|------|------|------|------|
| Code | X    | Y    | Z    | A    | B    | C    | D    | E    | F    | G    | H    |

| Month | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Code  | 1   | 2   | 3   | 4   | 5   | 6   | 7   | 8   | 9   | O   | N   | D   |

## Absolute Maximum Ratings NPN Section (@T<sub>A</sub> = +25°C, unless otherwise specified.)

| Characteristic                     |          | Symbol               | Value      | Unit |
|------------------------------------|----------|----------------------|------------|------|
| Supply Voltage <Pin: (6) to (1)>   |          | V <sub>CC</sub>      | 50         | V    |
| Input Voltage<br><Pin: (2) to (1)> | DCX124EU | V <sub>IN</sub>      | -10 to +40 | V    |
|                                    | DCX144EU |                      | -10 to +40 |      |
|                                    | DCX114YU |                      | -6 to +40  |      |
|                                    | DCX123JU |                      | -5 to +12  |      |
|                                    | DCX114EU |                      | -10 to +40 |      |
|                                    | DCX143TU |                      | -5V max    |      |
|                                    | DCX143EU |                      | -10 to +30 |      |
|                                    | DCX114TU |                      | -5V max    |      |
|                                    | DCX143ZU |                      | -10 to +30 |      |
|                                    | DCX115EU |                      | -10 to +40 |      |
| Output Current                     | DCX124EU | I <sub>O</sub>       | 30         | mA   |
|                                    | DCX144EU |                      | 30         |      |
|                                    | DCX114YU |                      | 70         |      |
|                                    | DCX123JU |                      | 100        |      |
|                                    | DCX114EU |                      | 50         |      |
|                                    | DCX143TU |                      | 100        |      |
|                                    | DCX143EU |                      | 100        |      |
|                                    | DCX114TU |                      | 100        |      |
|                                    | DCX143ZU |                      | 100        |      |
|                                    | DCX115EU |                      | 20         |      |
| Output Current                     |          | I <sub>C</sub> (Max) | 100        | mA   |

### Absolute Maximum Ratings PNP Section (@T<sub>A</sub> = +25°C, unless otherwise specified.)

| Characteristic                     |          | Symbol               | Value      | Unit |
|------------------------------------|----------|----------------------|------------|------|
| Supply Voltage <Pin: (4) to (3)>   |          | V <sub>CC</sub>      | 50         | V    |
| Input Voltage<br><Pin: (5) to (4)> | DCX124EU | V <sub>IN</sub>      | +10 to -40 | V    |
|                                    | DCX144EU |                      | +10 to -40 |      |
|                                    | DCX114YU |                      | +6 to -40  |      |
|                                    | DCX123JU |                      | +5 to -12  |      |
|                                    | DCX114EU |                      | +10 to -40 |      |
|                                    | DCX143TU |                      | +5V max    |      |
|                                    | DCX143EU |                      | +10 to -30 |      |
|                                    | DCX114TU |                      | +5V max    |      |
|                                    | DCX143ZU |                      | +5 to -30  |      |
|                                    | DCX115EU |                      | +10 to -40 |      |
| Output Current                     | DCX124EU | I <sub>O</sub>       | -30        | mA   |
|                                    | DCX144EU |                      | -30        |      |
|                                    | DCX114YU |                      | -70        |      |
|                                    | DCX123JU |                      | -100       |      |
|                                    | DCX114EU |                      | -50        |      |
|                                    | DCX143TU |                      | -100       |      |
|                                    | DCX143EU |                      | -100       |      |
|                                    | DCX114TU |                      | -100       |      |
|                                    | DCX143ZU |                      | -100       |      |
|                                    | DCX115EU |                      | -20        |      |
| Output Current                     |          | I <sub>C</sub> (Max) | -100       | mA   |

### Thermal Characteristics (@T<sub>A</sub> = +25°C, unless otherwise specified.)

| Characteristic                                       | Symbol                            | Value       | Unit |
|------------------------------------------------------|-----------------------------------|-------------|------|
| Power Dissipation (Notes 6 & 7)                      | P <sub>D</sub>                    | 200         | mW   |
| Thermal Resistance, Junction to Ambient Air (Note 6) | R <sub>θJA</sub>                  | +625        | °C/W |
| Operating and Storage Temperature Range              | T <sub>J</sub> , T <sub>STG</sub> | -55 to +150 | °C   |

Notes: 6. Mounted on FR4 PC Board with minimum recommended pad layout  
7. 150mW per element must not be exceeded.

# Electrical Characteristics NPN Section (@T<sub>A</sub> = +25°C, unless otherwise specified.)


| Characteristic                             |           | Symbol                          | Min | Typ  | Max  | Unit | Test Condition                                                                                                    |
|--------------------------------------------|-----------|---------------------------------|-----|------|------|------|-------------------------------------------------------------------------------------------------------------------|
| <b>R1 Only (DCX143TU &amp; DCX114TU)</b>   |           |                                 |     |      |      |      |                                                                                                                   |
| Collector-Base Breakdown Voltage           |           | BV <sub>CBO</sub>               | 50  | —    | —    | V    | I <sub>C</sub> = 50μA                                                                                             |
| Collector-Emitter Breakdown Voltage        |           | BV <sub>CEO</sub>               | 50  | —    | —    | V    | I <sub>C</sub> = 1mA                                                                                              |
| Emitter-Base Breakdown Voltage             |           | BV <sub>EBO</sub>               | 5   | —    | —    | V    | I <sub>E</sub> = 50μA                                                                                             |
| Collector Cutoff Current                   |           | I <sub>CBO</sub>                | —   | —    | 0.5  | μA   | V <sub>CB</sub> = 50V                                                                                             |
| Emitter Cutoff Current                     |           | I <sub>EBO</sub>                | —   | —    | 0.5  | μA   | V <sub>EB</sub> = 4V                                                                                              |
| Collector-Emitter Saturation Voltage       |           | V <sub>CE(sat)</sub>            | —   | —    | 0.3  | V    | I <sub>C</sub> /I <sub>B</sub> = 2.5mA / 0.25mA DCX143TU<br>I <sub>C</sub> /I <sub>B</sub> = 1mA / 0.1mA DCX114TU |
| DC Current Transfer Ratio                  |           | h <sub>FE</sub>                 | 100 | 250  | 600  | —    | I <sub>C</sub> = 1mA, V <sub>CE</sub> = 5V                                                                        |
| Input Resistor (R <sub>1</sub> ) Tolerance |           | ΔR <sub>1</sub>                 | -30 | —    | +30  | %    | —                                                                                                                 |
| Gain-Bandwidth Product                     |           | f <sub>T</sub>                  | —   | 250  | —    | MHz  | V <sub>CE</sub> = 10V, I <sub>E</sub> = -5mA, f = 100MHz                                                          |
| <b>R1/R2 Only</b>                          |           |                                 |     |      |      |      |                                                                                                                   |
| Input Voltage                              | DCX124EU  | V <sub>I(off)</sub>             | 0.5 | 1.1  | —    | V    | V <sub>CC</sub> = 5V, I <sub>O</sub> = 100μA                                                                      |
|                                            | DCX144EU  |                                 | 0.5 | 1.1  |      |      |                                                                                                                   |
|                                            | DCX114YU  |                                 | 0.3 | —    |      |      |                                                                                                                   |
|                                            | DCX123JU  |                                 | 0.5 | —    |      |      |                                                                                                                   |
|                                            | DCX114EU  |                                 | 0.5 | 1.1  |      |      |                                                                                                                   |
|                                            | DCX143EU  |                                 | 0.5 | 1.16 |      |      |                                                                                                                   |
|                                            | DCX143ZU  |                                 | 0.5 | —    |      |      |                                                                                                                   |
|                                            | DCX115EU  |                                 | 0.5 | —    |      |      |                                                                                                                   |
|                                            | DCX124EU  | V <sub>I(on)</sub>              | —   | 1.9  | 3.0  |      | V <sub>O</sub> = 0.3V, I <sub>O</sub> = 5mA                                                                       |
|                                            | DCX144EU  |                                 |     | 1.9  | 3.0  |      | V <sub>O</sub> = 0.3V, I <sub>O</sub> = 2mA                                                                       |
|                                            | DCX114YU  |                                 |     | —    | 1.4  |      | V <sub>O</sub> = 0.3V, I <sub>O</sub> = 1mA                                                                       |
|                                            | DCX123JU  |                                 |     | —    | 1.1  |      | V <sub>O</sub> = 0.3V, I <sub>O</sub> = 5mA                                                                       |
|                                            | DCX114EU  |                                 |     | 1.9  | 3.0  |      | V <sub>O</sub> = 0.3V, I <sub>O</sub> = 10mA                                                                      |
|                                            | DCX143EU  |                                 |     | 1.99 | 3.0  |      | V <sub>O</sub> = 0.3V, I <sub>O</sub> = 20mA                                                                      |
|                                            | DCX143ZU  |                                 |     | —    | 1.3  |      | V <sub>O</sub> = 0.3V, I <sub>O</sub> = 5mA                                                                       |
|                                            | DCX115EU  |                                 |     | —    | 3    |      | V <sub>O</sub> = 0.3V, I <sub>O</sub> = 1mA                                                                       |
| Output Voltage                             | DCX124EU  | V <sub>O(on)</sub>              | —   | 0.1  | 0.3  | V    | I <sub>O</sub> /I <sub>I</sub> = 10mA / 0.5mA                                                                     |
|                                            | DCX144EU  |                                 |     |      |      |      | I <sub>O</sub> /I <sub>I</sub> = 10mA / 0.5mA                                                                     |
|                                            | DCX114YU  |                                 |     |      |      |      | I <sub>O</sub> /I <sub>I</sub> = 5mA / 0.25mA                                                                     |
|                                            | DCX123JU  |                                 |     |      |      |      | I <sub>O</sub> /I <sub>I</sub> = 5mA / 0.25mA                                                                     |
|                                            | DCX114EU  |                                 |     |      |      |      | I <sub>O</sub> /I <sub>I</sub> = 10mA / 0.5mA                                                                     |
|                                            | DCX143EU  |                                 |     |      |      |      | I <sub>O</sub> /I <sub>I</sub> = 10mA / 0.5mA                                                                     |
|                                            | DCX143ZU  |                                 |     |      |      |      | I <sub>O</sub> /I <sub>I</sub> = 5mA / 0.25mA                                                                     |
|                                            | DCX115EU  |                                 |     |      |      |      | I <sub>O</sub> /I <sub>I</sub> = 10mA / 0.5mA                                                                     |
| Input Current                              | DCX124EU  | I <sub>I</sub>                  | —   | —    | 0.36 | mA   | V <sub>I</sub> = 5V                                                                                               |
|                                            | DCX144EU  |                                 |     |      | 0.18 |      |                                                                                                                   |
|                                            | DCX114YU  |                                 |     |      | 0.88 |      |                                                                                                                   |
|                                            | DCX123JU  |                                 |     |      | 3.6  |      |                                                                                                                   |
|                                            | DCX114EU  |                                 |     |      | 0.88 |      |                                                                                                                   |
|                                            | DCX143EU  |                                 |     |      | 0.88 |      |                                                                                                                   |
|                                            | DCX143ZU  |                                 |     |      | 1.8  |      |                                                                                                                   |
|                                            | DCX115EU  |                                 |     |      | 0.15 |      |                                                                                                                   |
| Output Current                             |           | I <sub>O(off)</sub>             | —   | —    | 0.5  | μA   | V <sub>CC</sub> = 50V, V <sub>I</sub> = 0V                                                                        |
| DC Current Gain                            | DCX124EU  | G <sub>I</sub>                  | 56  | —    | —    | —    | V <sub>O</sub> = 5V, I <sub>O</sub> = 5mA                                                                         |
|                                            | DCX124EUQ |                                 | 60  |      |      |      | V <sub>O</sub> = 5V, I <sub>O</sub> = 5mA                                                                         |
|                                            | DCX144EU  |                                 | 68  |      |      |      | V <sub>O</sub> = 5V, I <sub>O</sub> = 5mA                                                                         |
|                                            | DCX114YU  |                                 | 68  |      |      |      | V <sub>O</sub> = 5V, I <sub>O</sub> = 10mA                                                                        |
|                                            | DCX114YUQ |                                 | 80  |      |      |      | V <sub>O</sub> = 5V, I <sub>O</sub> = 10mA                                                                        |
|                                            | DCX123JU  |                                 | 80  |      |      |      | V <sub>O</sub> = 5V, I <sub>O</sub> = 10mA                                                                        |
|                                            | DCX114EU  |                                 | 30  |      |      |      | V <sub>O</sub> = 5V, I <sub>O</sub> = 5mA                                                                         |
|                                            | DCX143EU  |                                 | 50  |      |      |      | V <sub>O</sub> = 5V, I <sub>O</sub> = 10mA                                                                        |
|                                            | DCX143ZU  |                                 | 80  |      |      |      | V <sub>O</sub> = 5V, I <sub>O</sub> = 10mA                                                                        |
|                                            | DCX115EU  |                                 | 82  |      |      |      | V <sub>O</sub> = 5V, I <sub>O</sub> = 5mA                                                                         |
| Input Resistor (R <sub>1</sub> ) Tolerance |           | ΔR <sub>1</sub>                 | -30 | —    | +30  | %    | —                                                                                                                 |
| Resistance Ratio Tolerance                 |           | ΔR <sub>2</sub> /R <sub>1</sub> | -20 | —    | +20  | %    | —                                                                                                                 |
| Gain-Bandwidth Product                     |           | f <sub>T</sub>                  | —   | 250  | —    | MHz  | V <sub>CE</sub> = 10V, I <sub>E</sub> = 5mA, f = 100MHz                                                           |







# Electrical Characteristics PNP Section (@T<sub>A</sub> = +25°C, unless otherwise specified.)

| Characteristic                             |           | Symbol                          | Min  | Typ   | Max   | Unit | Test Condition                                                                                  |
|--------------------------------------------|-----------|---------------------------------|------|-------|-------|------|-------------------------------------------------------------------------------------------------|
| <b>R1 Only (DCX143TU &amp; DCX114TU)</b>   |           |                                 |      |       |       |      |                                                                                                 |
| Collector-Base Breakdown Voltage           |           | BV <sub>CBO</sub>               | -50  | —     | —     | V    | I <sub>C</sub> = -50μA                                                                          |
| Collector-Emitter Breakdown Voltage        |           | BV <sub>CEO</sub>               | -50  | —     | —     | V    | I <sub>C</sub> = -1mA                                                                           |
| Emitter-Base Breakdown Voltage             |           | BV <sub>EBO</sub>               | -5   | —     | —     | V    | I <sub>E</sub> = -50μA                                                                          |
| Collector Cutoff Current                   |           | I <sub>CBO</sub>                | —    | —     | -0.5  | μA   | V <sub>CB</sub> = -50V                                                                          |
| Emitter Cutoff Current                     |           | I <sub>EBO</sub>                | —    | —     | -0.5  | μA   | V <sub>EB</sub> = -4V                                                                           |
| Collector-Emitter Saturation Voltage       |           | V <sub>CE(sat)</sub>            | —    | —     | -0.3  | V    | I <sub>C</sub> /I <sub>B</sub> = 2.5mA / 0.25mA<br>I <sub>C</sub> /I <sub>B</sub> = 1mA / 0.1mA |
| DC Current Transfer Ratio                  |           | h <sub>FE</sub>                 | 100  | 250   | 600   | —    | I <sub>C</sub> = -1mA, V <sub>CE</sub> = -5V                                                    |
| Input Resistor (R <sub>1</sub> ) Tolerance |           | ΔR <sub>1</sub>                 | -30  | —     | +30   | %    | —                                                                                               |
| Gain-Bandwidth Product                     |           | f <sub>T</sub>                  | —    | 250   | —     | MHz  | V <sub>CE</sub> = -10V, I <sub>E</sub> = 5mA, f = 100MHz                                        |
| <b>R1/R2 Only</b>                          |           |                                 |      |       |       |      |                                                                                                 |
| Input Voltage                              | DCX124EU  | V <sub>I(off)</sub>             | -0.5 | -1.1  | —     | V    | V <sub>CC</sub> = -5V, I <sub>O</sub> = -100μA                                                  |
|                                            | DCX144EU  |                                 | -0.5 | -1.1  |       |      |                                                                                                 |
|                                            | DCX114YU  |                                 | -0.3 | —     |       |      |                                                                                                 |
|                                            | DCX123JU  |                                 | -0.5 | —     |       |      |                                                                                                 |
|                                            | DCX114EU  |                                 | -0.5 | -1.1  |       |      |                                                                                                 |
|                                            | DCX143EU  |                                 | -0.5 | -1.16 |       |      |                                                                                                 |
|                                            | DCX143ZU  |                                 | -0.5 | —     |       |      |                                                                                                 |
|                                            | DCX115EU  |                                 | -0.5 | —     |       |      |                                                                                                 |
|                                            | DCX124EU  | V <sub>I(on)</sub>              | —    | -1.9  | -3.0  |      | V <sub>O</sub> = -0.3V, I <sub>O</sub> = -5mA                                                   |
|                                            | DCX144EU  |                                 | —    | -1.9  | -3.0  |      | V <sub>O</sub> = -0.3V, I <sub>O</sub> = -2mA                                                   |
|                                            | DCX114YU  |                                 | —    | —     | -1.4  |      | V <sub>O</sub> = -0.3V, I <sub>O</sub> = -1mA                                                   |
|                                            | DCX123JU  |                                 | —    | —     | -1.1  |      | V <sub>O</sub> = -0.3V, I <sub>O</sub> = -5mA                                                   |
|                                            | DCX114EU  |                                 | —    | -1.9  | -3.0  |      | V <sub>O</sub> = -0.3V, I <sub>O</sub> = -10mA                                                  |
|                                            | DCX143EU  |                                 | —    | -2.5  | -3.0  |      | V <sub>O</sub> = -0.3V, I <sub>O</sub> = -20mA                                                  |
|                                            | DCX143ZU  |                                 | —    | —     | -1.3  |      | V <sub>O</sub> = -0.3V, I <sub>O</sub> = -5mA                                                   |
|                                            | DCX115EU  |                                 | —    | —     | -3    |      | V <sub>O</sub> = -0.3V, I <sub>O</sub> = -1mA                                                   |
| Output Voltage                             | DCX124EU  | V <sub>O(on)</sub>              | —    | -0.1  | -0.3  | V    | I <sub>O</sub> /I <sub>I</sub> = -10mA / -0.5mA                                                 |
|                                            | DCX144EU  |                                 |      |       |       |      | I <sub>O</sub> /I <sub>I</sub> = -10mA / -0.5mA                                                 |
|                                            | DCX114YU  |                                 |      |       |       |      | I <sub>O</sub> /I <sub>I</sub> = -5mA / -0.25mA                                                 |
|                                            | DCX123JU  |                                 |      |       |       |      | I <sub>O</sub> /I <sub>I</sub> = -5mA / -0.25mA                                                 |
|                                            | DCX114EU  |                                 |      |       |       |      | I <sub>O</sub> /I <sub>I</sub> = -10mA / -0.5mA                                                 |
|                                            | DCX143EU  |                                 |      |       |       |      | I <sub>O</sub> /I <sub>I</sub> = -10mA / -0.5mA                                                 |
|                                            | DCX143ZU  |                                 |      |       |       |      | I <sub>O</sub> /I <sub>I</sub> = -5mA / -0.25mA                                                 |
|                                            | DCX115EU  |                                 |      |       |       |      | I <sub>O</sub> /I <sub>I</sub> = -10mA / -0.5mA                                                 |
| Input Current                              | DCX124EU  | I <sub>I</sub>                  | —    | —     | -0.36 | mA   | V <sub>I</sub> = -5V                                                                            |
|                                            | DCX144EU  |                                 |      |       | -0.18 |      |                                                                                                 |
|                                            | DCX114YU  |                                 |      |       | -0.88 |      |                                                                                                 |
|                                            | DCX123JU  |                                 |      |       | -3.6  |      |                                                                                                 |
|                                            | DCX114EU  |                                 |      |       | -0.88 |      |                                                                                                 |
|                                            | DCX143EU  |                                 |      |       | -0.88 |      |                                                                                                 |
|                                            | DCX143ZU  |                                 |      |       | -1.8  |      |                                                                                                 |
|                                            | DCX115EU  |                                 |      |       | -0.15 |      |                                                                                                 |
| Output Current                             |           | I <sub>O(off)</sub>             | —    | —     | -0.5  | μA   | V <sub>CC</sub> = 50V, V <sub>I</sub> = 0V                                                      |
| DC Current Gain                            | DCX124EU  | G <sub>I</sub>                  | 56   | —     | —     | —    | V <sub>O</sub> = -5V, I <sub>O</sub> = -5mA                                                     |
|                                            | DCX124EUQ |                                 | 60   |       |       |      | V <sub>O</sub> = -5V, I <sub>O</sub> = -5mA                                                     |
|                                            | DCX144EU  |                                 | 68   |       |       |      | V <sub>O</sub> = -5V, I <sub>O</sub> = -5mA                                                     |
|                                            | DCX114YU  |                                 | 68   |       |       |      | V <sub>O</sub> = -5V, I <sub>O</sub> = -10mA                                                    |
|                                            | DCX114YUQ |                                 | 80   |       |       |      | V <sub>O</sub> = -5V, I <sub>O</sub> = -10mA                                                    |
|                                            | DCX123JU  |                                 | 80   |       |       |      | V <sub>O</sub> = -5V, I <sub>O</sub> = -10mA                                                    |
|                                            | DCX114EU  |                                 | 30   |       |       |      | V <sub>O</sub> = -5V, I <sub>O</sub> = -5mA                                                     |
|                                            | DCX143EU  |                                 | 40   |       |       |      | V <sub>O</sub> = -5V, I <sub>O</sub> = -10mA                                                    |
|                                            | DCX143ZU  |                                 | 80   |       |       |      | V <sub>O</sub> = -5V, I <sub>O</sub> = -10mA                                                    |
|                                            | DCX115EU  |                                 | 82   |       |       |      | V <sub>O</sub> = -5V, I <sub>O</sub> = -5mA                                                     |
| Input Resistor (R <sub>1</sub> ) Tolerance |           | ΔR <sub>1</sub>                 | -30  | —     | +30   | %    | —                                                                                               |
| Resistance Ratio Tolerance                 |           | ΔR <sub>2</sub> /R <sub>1</sub> | -20  | —     | +20   | %    | —                                                                                               |
| Gain-Bandwidth Product                     |           | f <sub>T</sub>                  | —    | 250   | —     | MHz  | V <sub>CE</sub> = -10V, I <sub>E</sub> = -5mA, f = 100MHz                                       |


## Typical Curves – Total Device

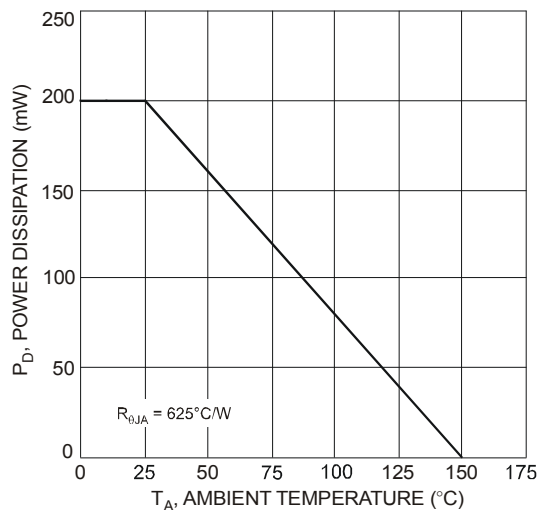





## Typical Curves – DCX123JU PNP Section (@ $T_A = +25^\circ\text{C}$ , unless otherwise specified.)

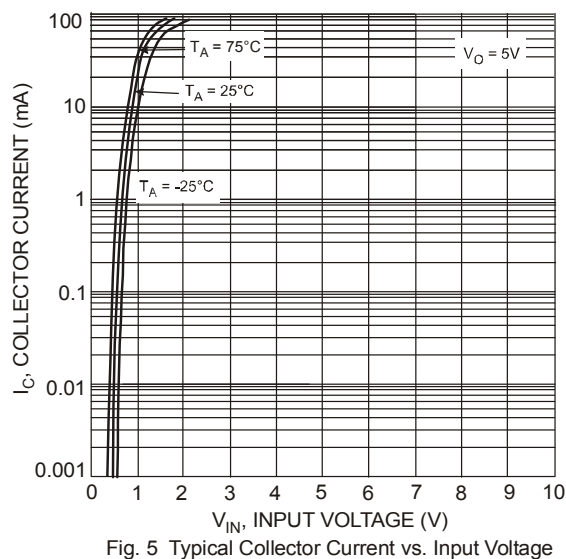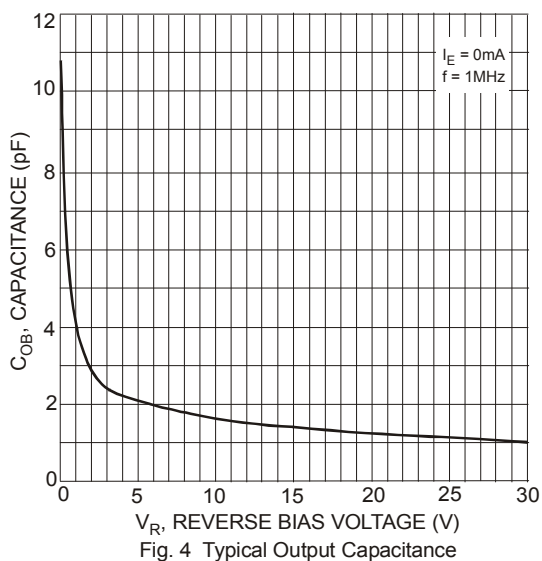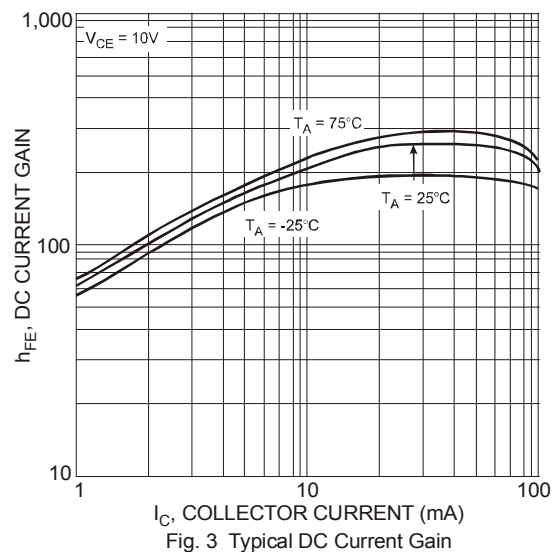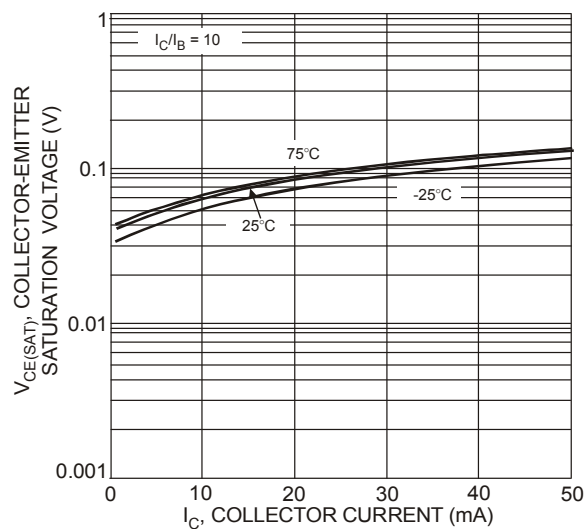


**Typical Curves – DCX123JU PNP Section (cont.)**




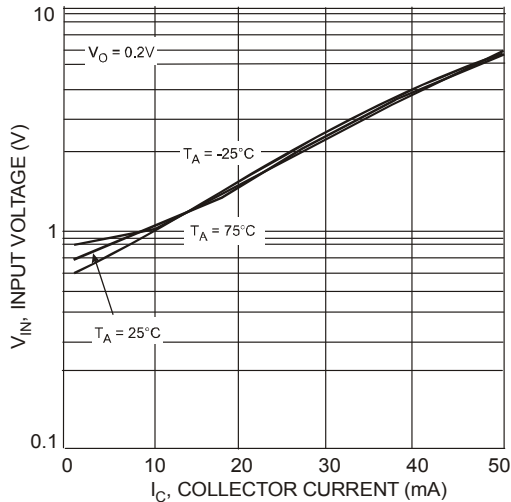


**Typical Curves – DCX123JU NPN Section (@T<sub>A</sub> = +25°C, unless otherwise specified.)**

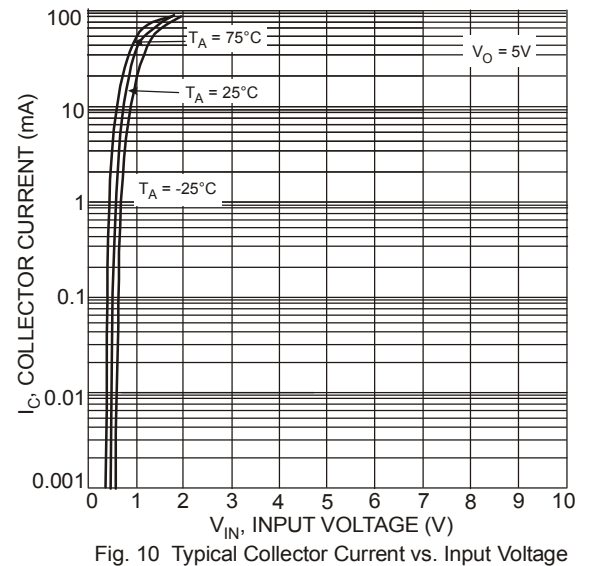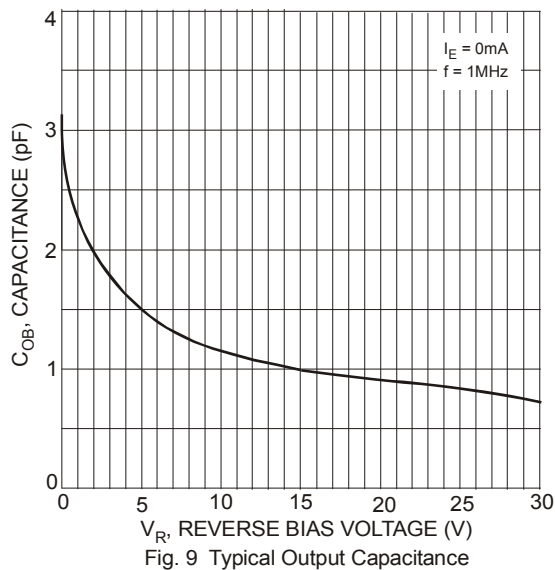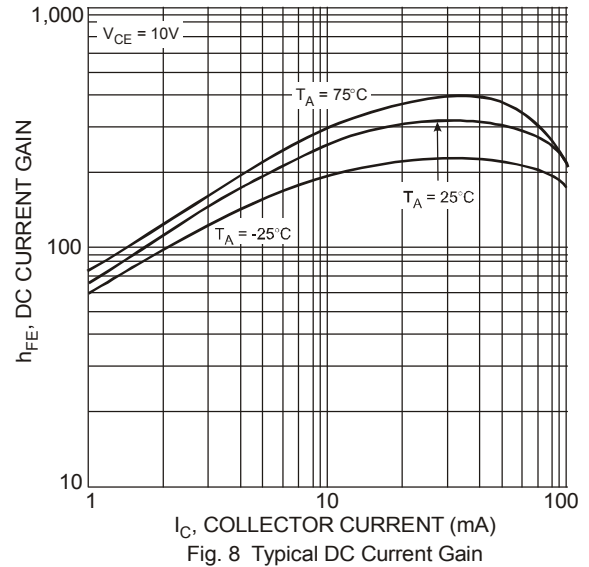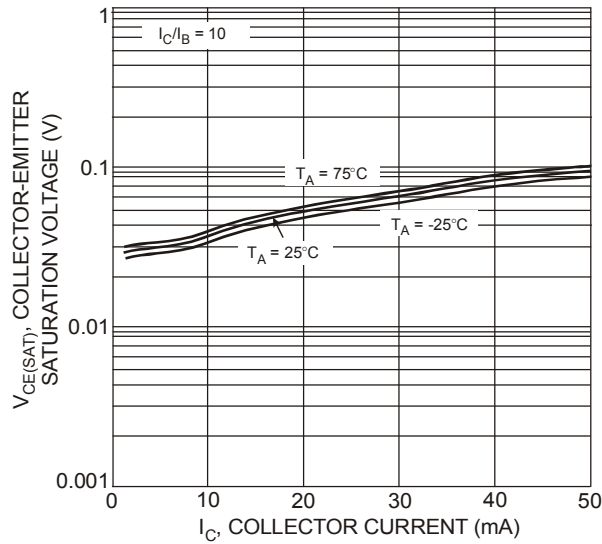

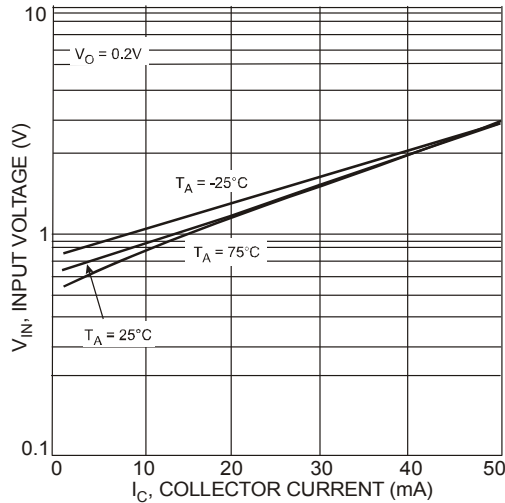

## Typical Curves – DCX143EU PNP Section (@ $T_A = +25^\circ\text{C}$ , unless otherwise specified.)

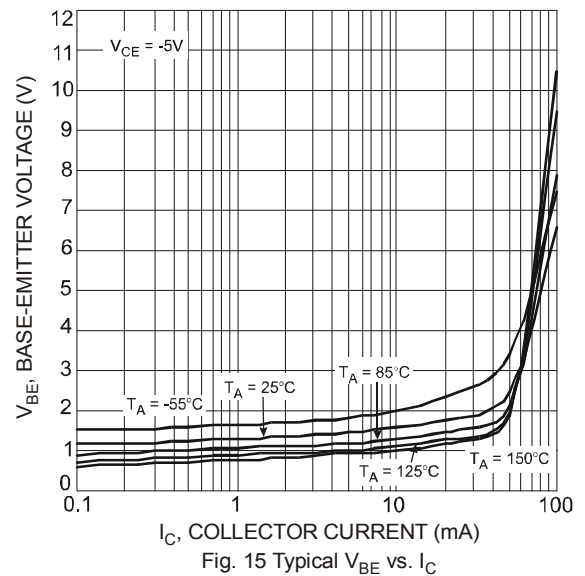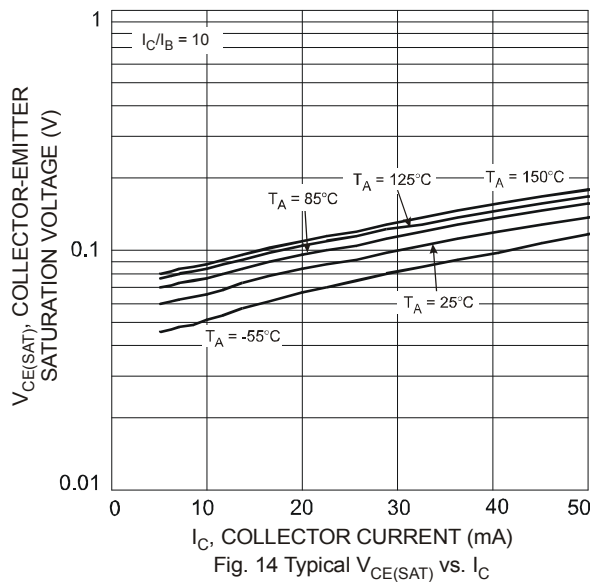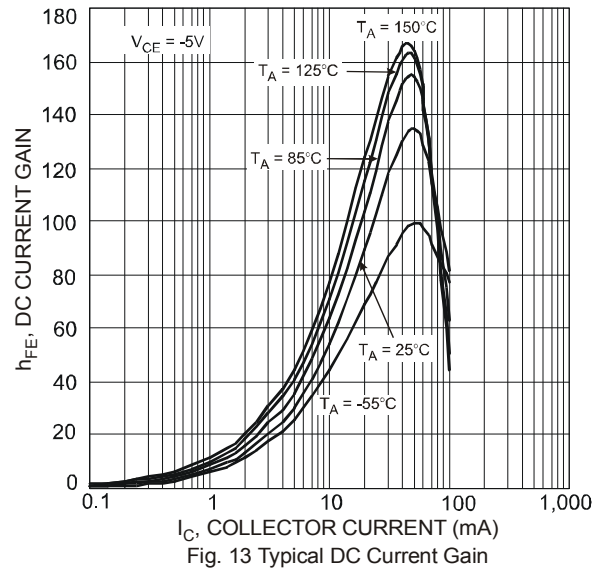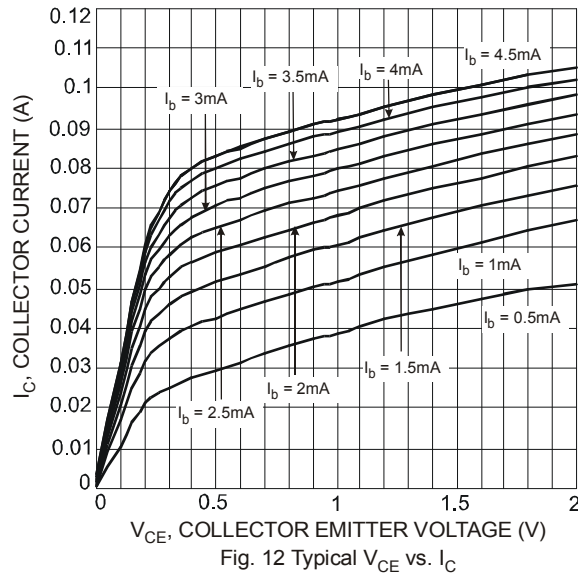

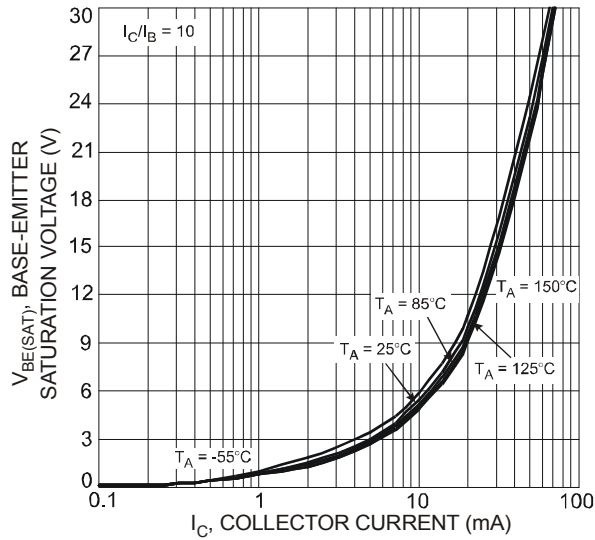


Fig. 16 Typical  $V_{BE(SAT)}$  vs.  $I_C$

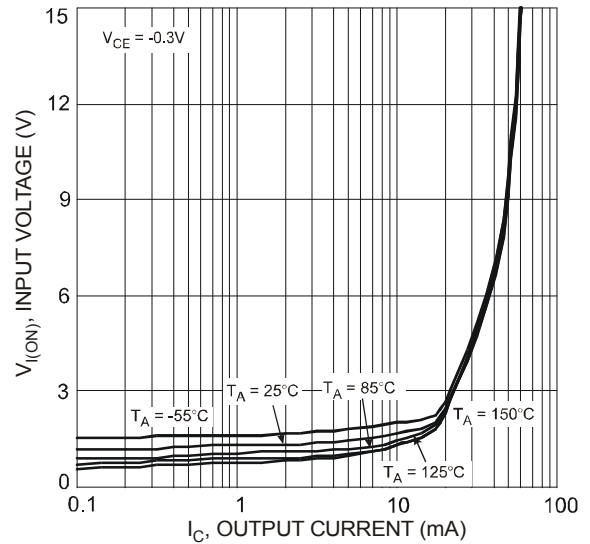


Fig. 17 Typical  $V_{I(ON)}$  vs.  $I_C$

## Typical Curves – DCX143EU NPN Section (@ $T_A = +25^\circ\text{C}$ , unless otherwise specified.)

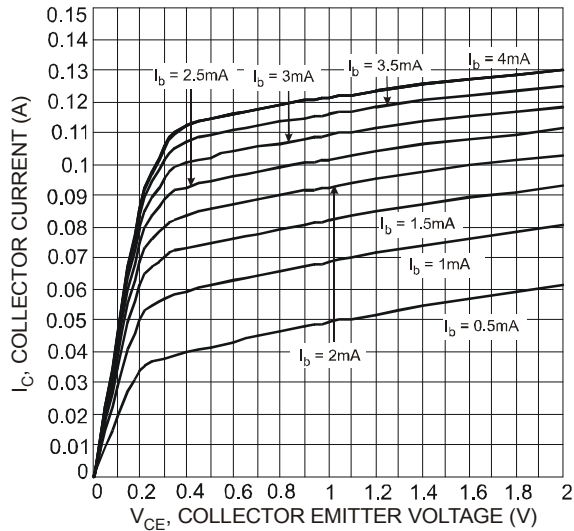


Fig. 18 Typical  $V_{CE}$  vs.  $I_C$

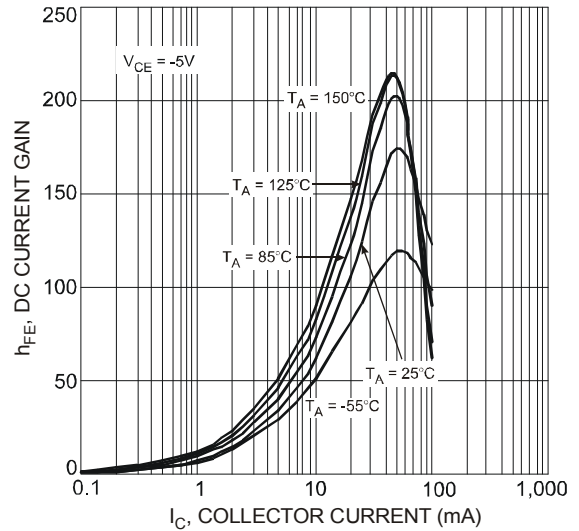


Fig. 19 Typical DC Current Gain

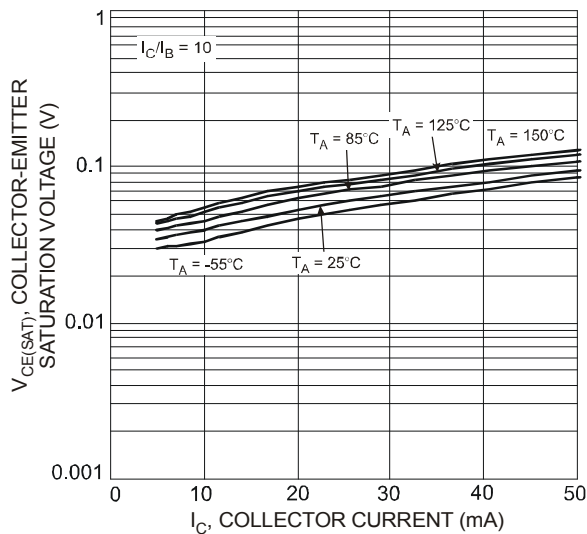


Fig. 20 Typical  $V_{CE(SAT)}$  vs.  $I_C$







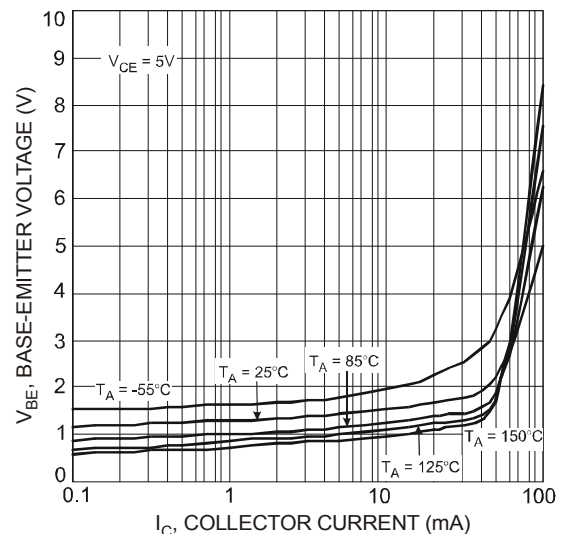


Fig. 21 Typical  $V_{BE}$  vs.  $I_C$

## Typical Curves – DCX143EU NPN Section (cont.)

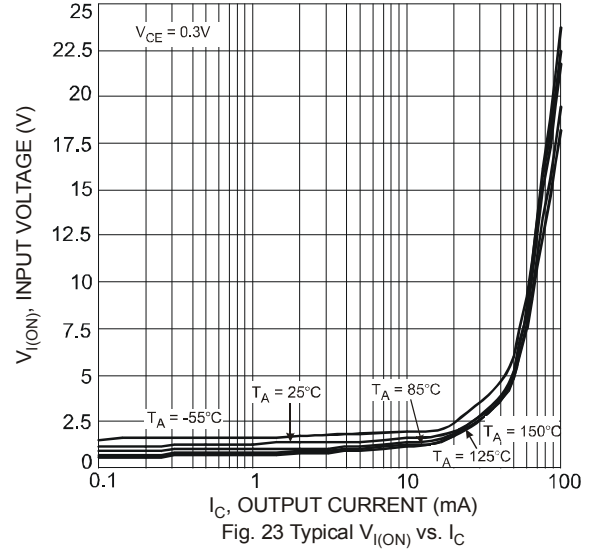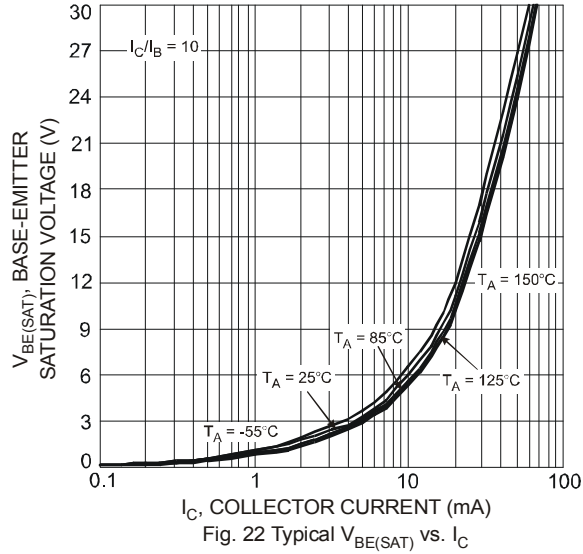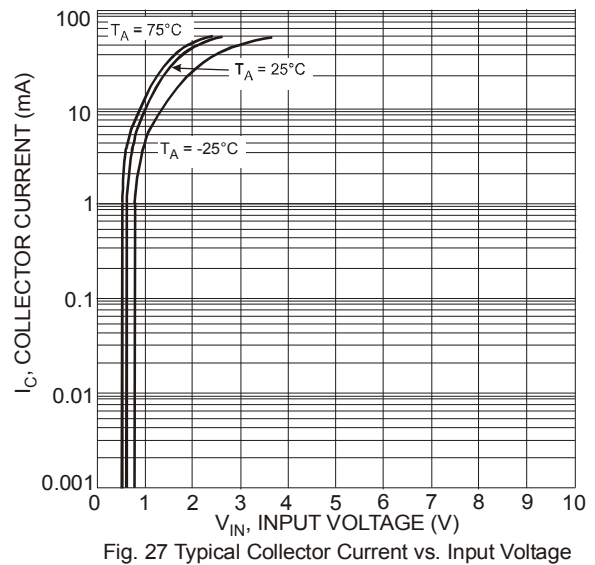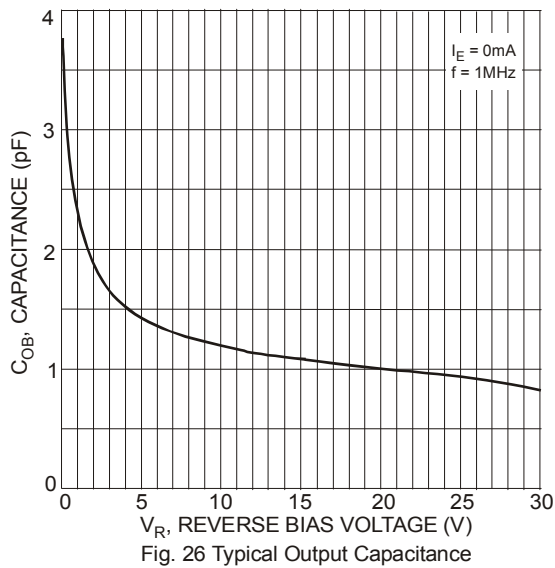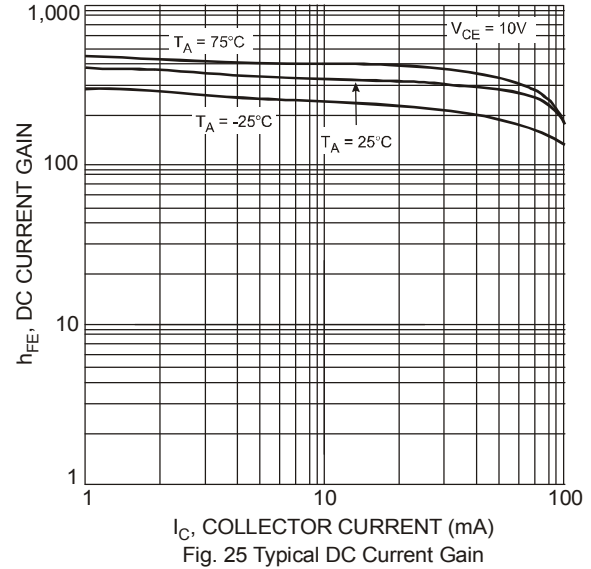

## Typical Curves – DCX114TU PNP Section (@ $T_A = +25^\circ\text{C}$ , unless otherwise specified.)

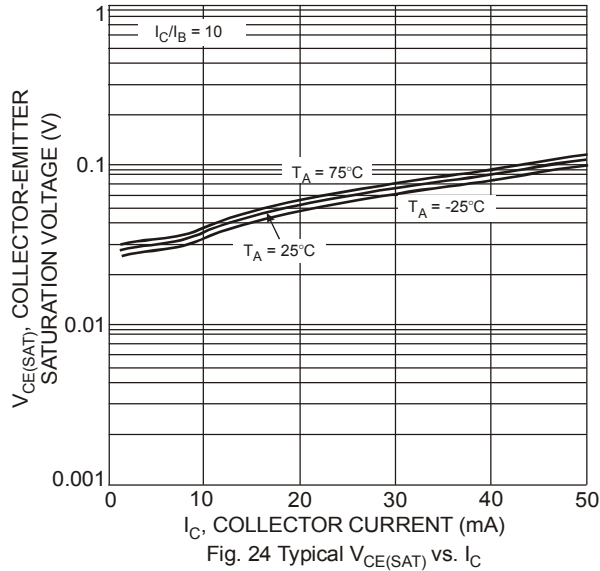

## Typical Curves – DCX114TU PNP Section (cont.)

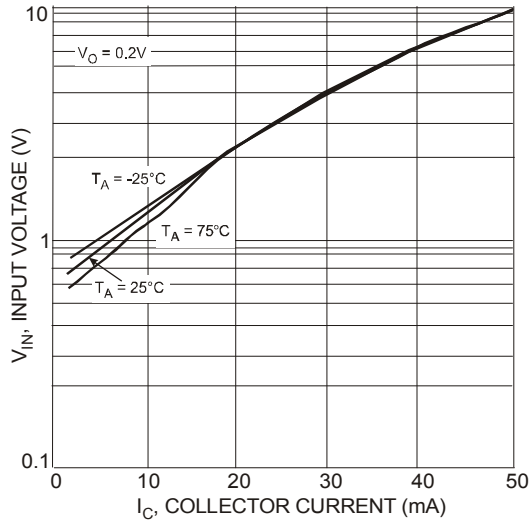


Fig. 28 Typical Input Voltage vs. Collector Current

## Typical Curves – DCX114TU NPN Section (@ $T_A = +25^\circ\text{C}$ , unless otherwise specified.)

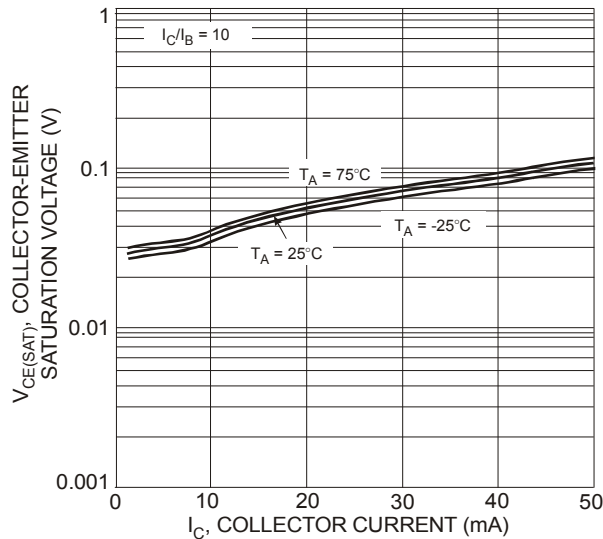


Fig. 29 Typical  $V_{CE(SAT)}$  vs.  $I_C$

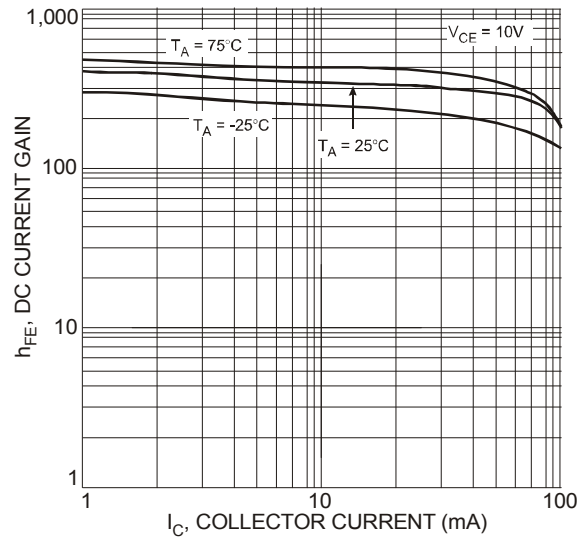


Fig. 30 Typical DC Current Gain

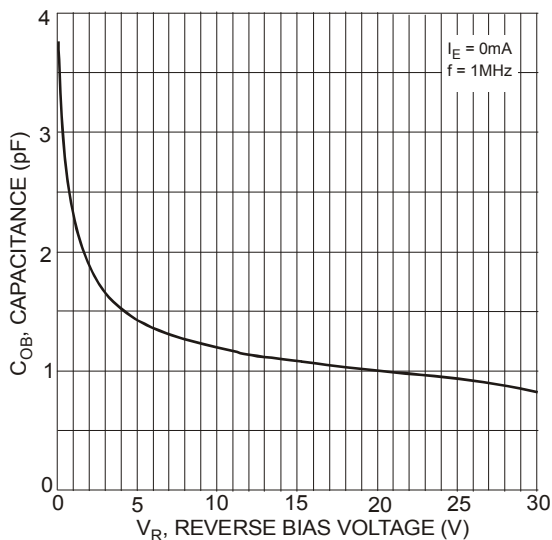


Fig. 31 Typical Output Capacitance


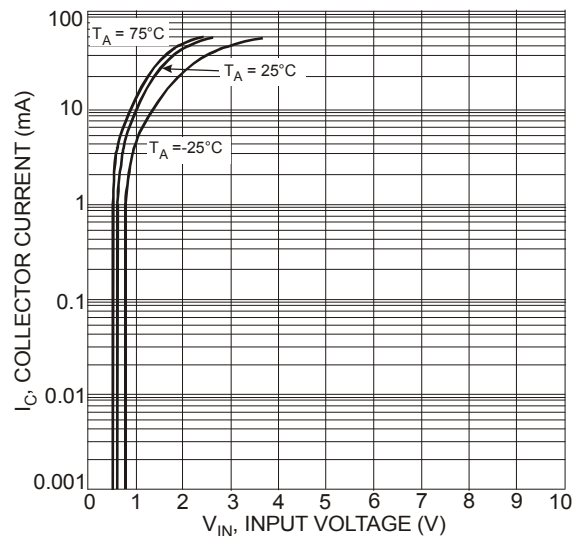



Fig. 32 Typical Collector Current vs. Input Voltage

## Typical Curves – DCX114TU NPN Section (cont.)

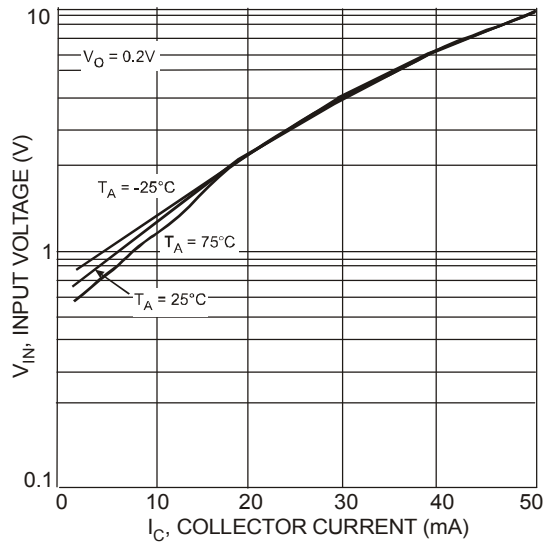

## Package Outline Dimensions


Please see AP02002 at <http://www.diodes.com/datasheets/ap02002.pdf> for the latest version.

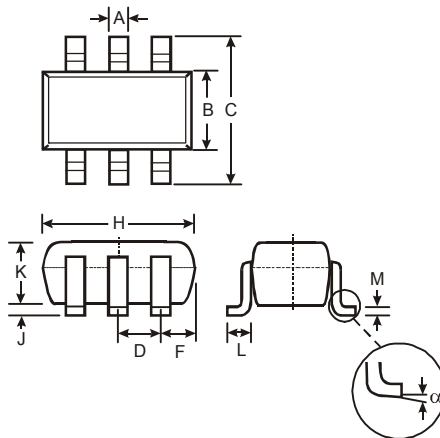

| SOT363               |          |      |       |
|----------------------|----------|------|-------|
| Dim                  | Min      | Max  | Typ   |
| A                    | 0.10     | 0.30 | 0.25  |
| B                    | 1.15     | 1.35 | 1.30  |
| C                    | 2.00     | 2.20 | 2.10  |
| D                    | 0.65 Typ |      |       |
| F                    | 0.40     | 0.45 | 0.425 |
| H                    | 1.80     | 2.20 | 2.15  |
| J                    | 0        | 0.10 | 0.05  |
| K                    | 0.90     | 1.00 | 1.00  |
| L                    | 0.25     | 0.40 | 0.30  |
| M                    | 0.10     | 0.22 | 0.11  |
| $\alpha$             | 0°       | 8°   | -     |
| All Dimensions in mm |          |      |       |

## Suggested Pad Layout

Please see AP02001 at <http://www.diodes.com/datasheets/ap02001.pdf> for the latest version.



| Dimensions | Value (in mm) |
|------------|---------------|
| Z          | 2.5           |
| G          | 1.3           |
| X          | 0.42          |
| Y          | 0.6           |
| C1         | 1.9           |
| C2         | 0.65          |

**IMPORTANT NOTICE**

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

**LIFE SUPPORT**

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or
2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2014, Diodes Incorporated

[www.diodes.com](http://www.diodes.com)



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331