

Analog Devices Welcomes Hittite Microwave Corporation

NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED



THIS PAGE INTENTIONALLY LEFT BLANK

Typical Applications

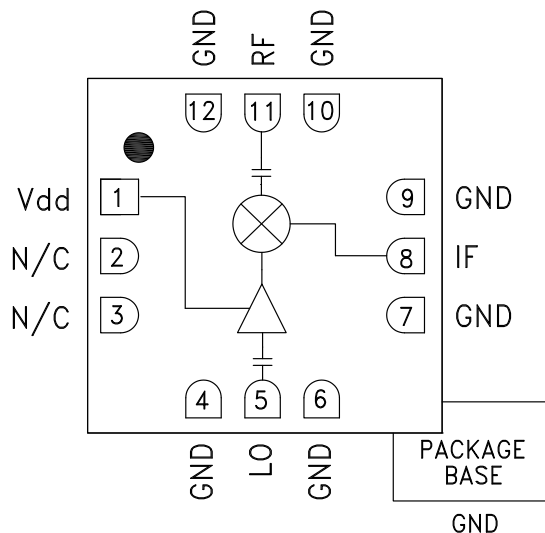
The HMC264LC3B is ideal for:

- Point-to-Point Radios
- Point-to-Multi-Point Radios & VSAT
- Test Equipment & Sensors
- Military End-Use

Features

- Integrated LO Amplifier: -4 to +4 dBm Input
- Sub-Harmonically Pumped (x2) LO
- High 2LO/RF Isolation: 30 dB
- DC - 6 GHz Wideband IF
- 12 Lead 3x3mm SMT Package: 9mm²

Functional Diagram



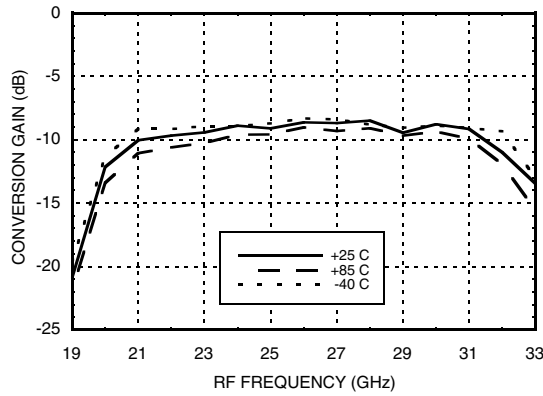
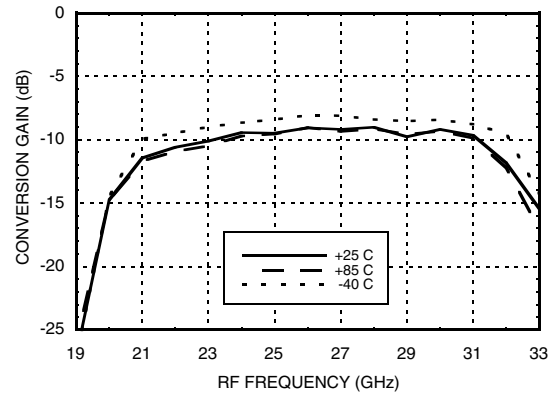
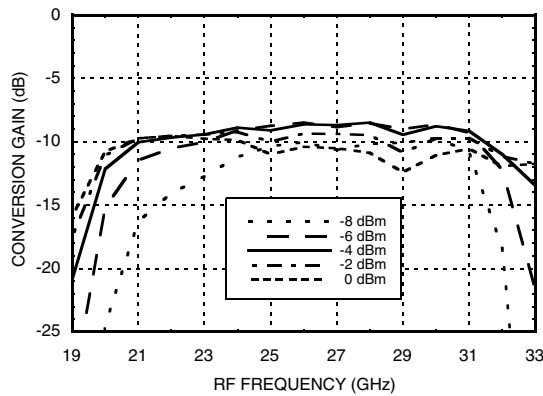
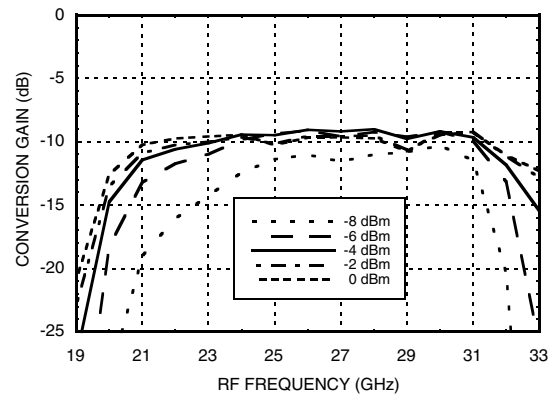
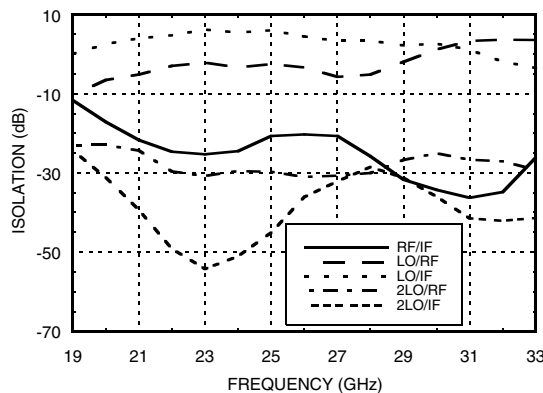
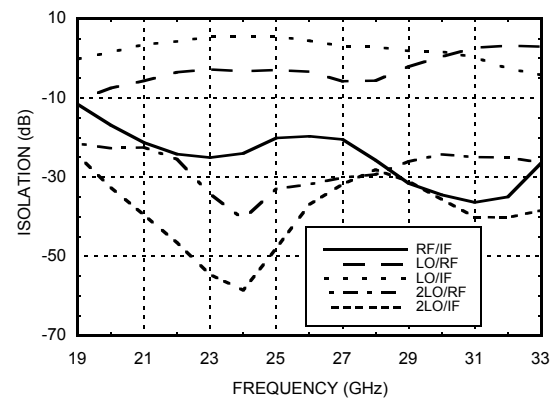
General Description

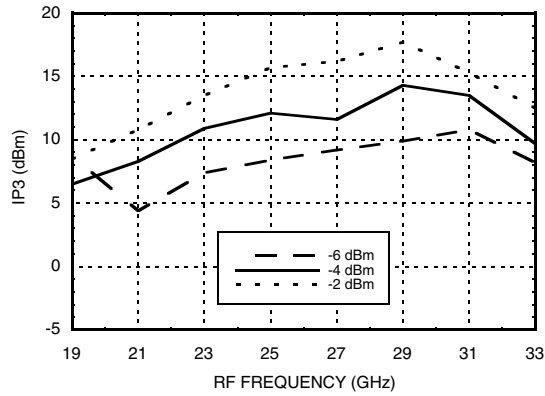
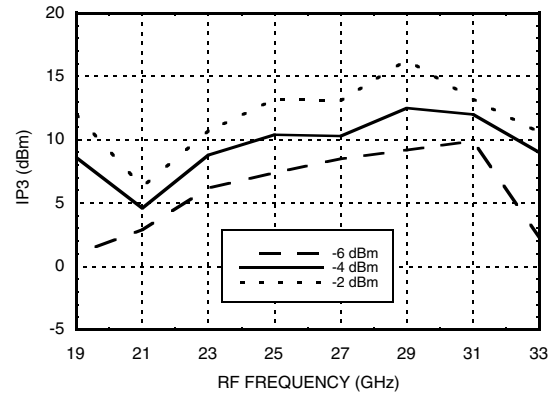
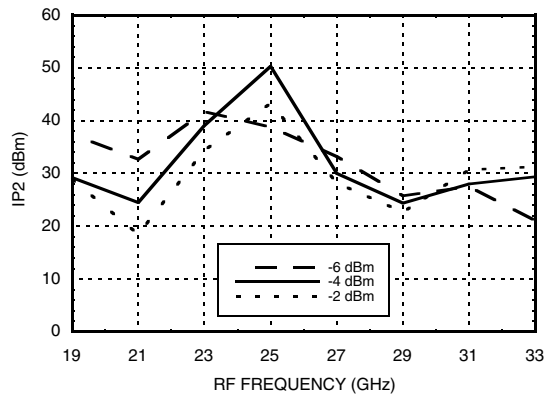
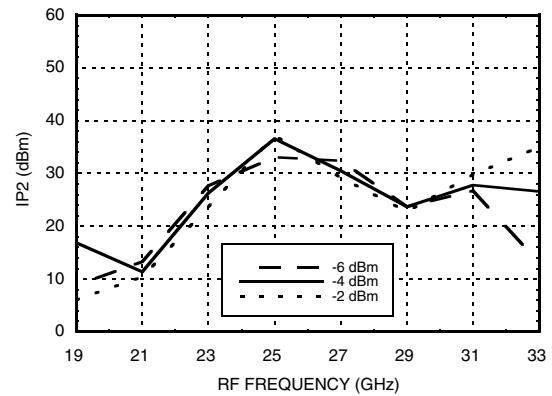
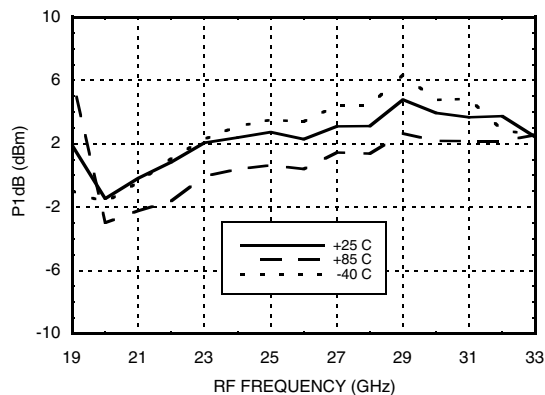
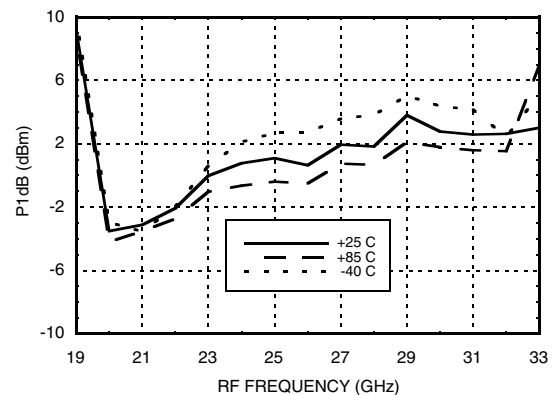
The HMC264LC3B is a 21 - 31 GHz Sub-harmonically Pumped (x2) MMIC Mixer with an integrated LO amplifier in a leadless "Pb Free" SMT package. The 2LO to RF isolation is excellent at 30 dB, eliminating the need for additional filtering. The LO amplifier is a single bias (+3V to +4V) design with only -4 to +4 dBm drive requirement. The RF and LO ports are DC blocked and matched to 50 Ohms for ease of use while the IF covers DC to 6 GHz. The HMC264LC3B eliminates the need for wire bonding, allowing use of surface mount manufacturing techniques.

Electrical Specifications, $T_A = +25^\circ\text{C}$, As a Function of LO Drive & Vdd

| Parameter | IF = 1 GHz LO = -4 dBm & Vdd = +4V | | | IF = 1 GHz LO = -4 dBm & Vdd = +3V | | | Units |
|-----------------------------------|---------------------------------------|------|------|---------------------------------------|------|------|-------|
| | Min. | Typ. | Max. | Min. | Typ. | Max. | |
| Frequency Range, RF | 21 - 31 | | | 22 - 31 | | | GHz |
| Frequency Range, LO | 10.5 - 15.5 | | | 11 - 15.5 | | | GHz |
| Frequency Range, IF | DC - 6 | | | DC - 6 | | | GHz |
| Conversion Loss | | 9 | 12 | | 9 | 12 | dB |
| Noise Figure (SSB) | | 9 | 12 | | 9 | 12 | dB |
| 2LO to RF Isolation | 20 | 30 | | 18 | 30 | | dB |
| 2LO to IF Isolation | 25 | 40 | | 25 | 40 | | dB |
| IP3 (Input) | | 12 | | | 10 | | dBm |
| 1 dB Compression (Input) | | +3 | | | +1 | | dBm |
| Supply Current (I _{dd}) | | 28 | | | 25 | | mA |

*Unless otherwise noted, all measurements performed as downconverter, IF= 1 GHz.


**GaAs MMIC SUB-HARMONIC
SMT MIXER, 21 - 31 GHz**
**Conversion Gain vs.
Temperature @ LO = -4 dBm, Vdd = +4V**

**Conversion Gain vs.
Temperature @ LO = -4 dBm, Vdd = +3V**

**Conversion Gain
vs. LO Drive @ Vdd = +4V**

**Conversion Gain
vs. LO Drive @ Vdd = +3V**

Isolation @ LO = -4 dBm, Vdd = +4V

Isolation @ LO = -4 dBm, Vdd = +3V


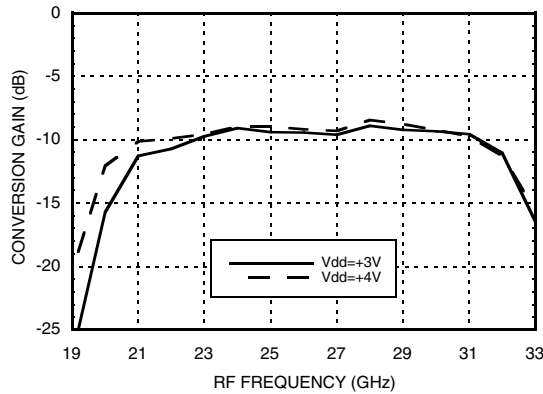
Input IP3 vs. LO Drive @ Vdd = +4V *

Input IP3 vs. LO Drive @ Vdd = +3V *

Input IP2 vs. LO Drive @ Vdd = +4V *

Input IP2 vs. LO Drive @ Vdd = +3V *

**Input P1dB vs. Temperature @
LO = -4 dBm, Vdd = +4V**

**Input P1dB vs. Temperature @
LO = -4 dBm, Vdd = +3V**


* Two-tone input power = -10 dBm each tone, 1 MHz spacing.

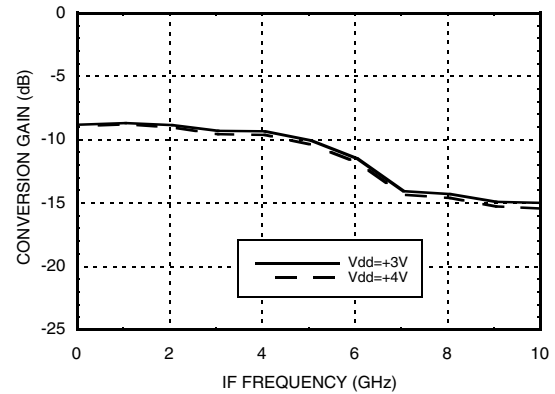


GaAs MMIC SUB-HARMONIC SMT MIXER, 21 - 31 GHz

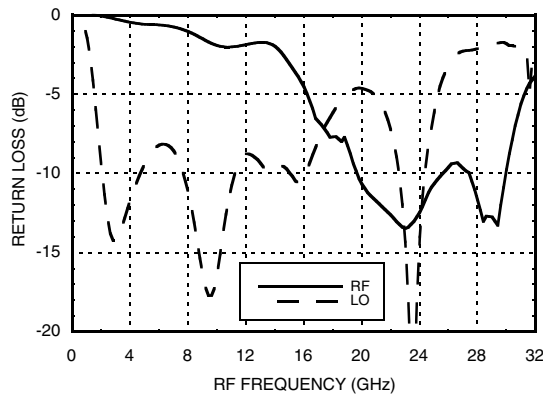
Upconverter Performance Conversion Gain @ LO = -4 dBm



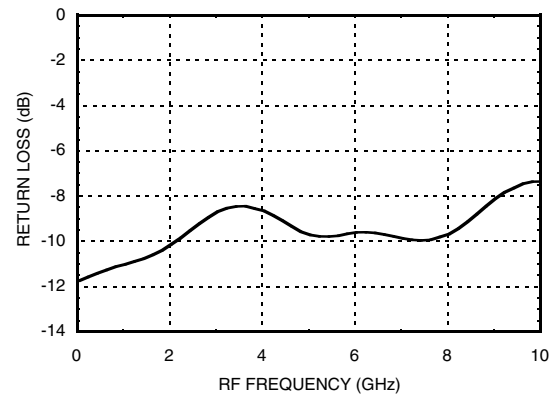
IF Bandwidth @ LO = -4 dBm



RF & LO Return Loss @ LO = -4 dBm



IF Return Loss @ LO = -4 dBm



MxN Spurious Outputs @ LO = -4 dBm, Vdd = +4V

| mRF | nLO | | | | | |
|-----|-----|----|----|----|-----|----|
| | ±5 | ±4 | ±3 | ±2 | ±1 | 0 |
| -2 | 30 | | | | | |
| -1 | 60 | 39 | 31 | | | |
| 0 | | | 17 | 14 | -17 | |
| 1 | | | | X | 35 | 25 |
| 2 | | 46 | 42 | 64 | 64 | |
| 3 | 82 | 80 | 82 | | | |

RF = 30 GHz @ -10 dBm
LO = 13.5 GHz @ -4 dBm
All values in dBc below IF power level.

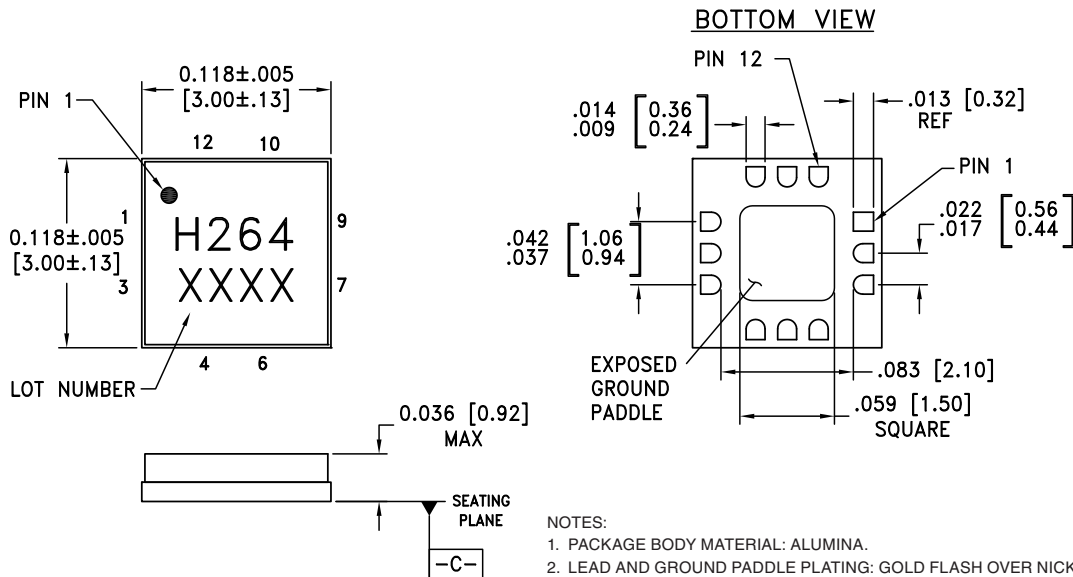
Absolute Maximum Ratings

| | |
|------------------------------------------------------------------------------|----------------|
| RF / IF Input (Vdd = +5V) | +13 dBm |
| LO Drive (Vdd = +5V) | +13 dBm |
| Vdd | 5.5V |
| Channel Temperature | 175 °C |
| Continuous P _{diss} (Ta = 85 °C) (derate 2.52 mW/°C above 85 °C) | 227 mW |
| Thermal Resistance (junction to ground paddle) | 397 °C/W |
| Storage Temperature | -65 to +150 °C |
| Operating Temperature | -40 to +85 °C |



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

Outline Drawing



- NOTES:
1. PACKAGE BODY MATERIAL: ALUMINA.
 2. LEAD AND GROUND PADDLE PLATING: GOLD FLASH OVER NICKEL.
 3. DIMENSIONS ARE IN INCHES (MILLIMETERS).
 4. LEAD SPACING TOLERANCE IS NON-CUMULATIVE.
 5. CHARACTERS TO BE HELVETICA MEDIUM, .025 HIGH, BLACK INK, OR LASER MARK LOCATED APPROX. AS SHOWN.
 6. PACKAGE WARP SHALL NOT EXCEED 0.05MM DATUM -C-
 7. ALL GROUND LEADS AND GROUND PADDLE MUST BE SOLDERED TO PCB RF GROUND.





Package Information

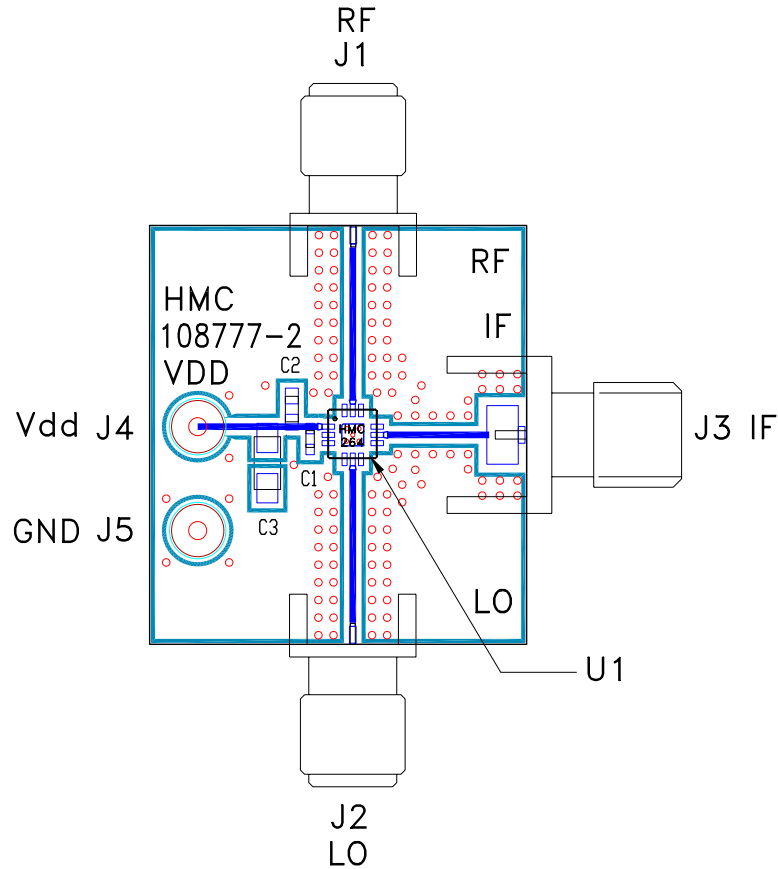
| Part Number | Package Body Material | Lead Finish | MSL Rating | Package Marking ^[2] |
|-------------|-----------------------|------------------|---------------------|--------------------------------|
| HMC264LC3B | Alumina, White | Gold over Nickel | MSL3 ^[1] | H264 XXXX |

[1] Max peak reflow temperature of 260 °C

[2] 4-Digit lot number XXXX


Pin Descriptions

| Pin Number | Function | Description | Interface Schematic |
|--------------------|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 1 | Vdd | Power supply for the LO Amplifier. External RF bypass capacitors are required as close to the package as possible. | |
| 2, 3 | N/C | No connection required. These pins may be connected to RF/DC ground without affecting performance. | |
| 4, 6, 7, 9, 10, 12 | GND | Package bottom must also be connected to RF/DC ground. |  |
| 5 | LO | LO Port. This pin is AC coupled and matched to 50 Ohms from 10.5 - 15.5 GHz. |  |
| 8 | IF | IF Port. This pin is DC coupled and should be DC blocked externally using a series capacitor whose value has been chosen to pass the necessary IF frequency range. Any applied DC voltage to this pin will result in die non-function and possible die failure. |  |
| 11 | RF | RF Port. This pin is AC coupled and matched to 50 Ohms from 21 - 31 GHz. |  |

Evaluation PCB

List of Materials for Evaluation PCB 108779 [1]

| Item | Description |
|---------|---------------------------------|
| J1 - J3 | PCB Mount SMA Connector |
| J4, J5 | DC Pin |
| C1 | 100 pF Capacitor, 0402 Pkg. |
| C2 | 1000 pF Capacitor, 0603 Pkg |
| C3 | 2.2 μ F Capacitor, Tantalum |
| U1 | HMC264LC3B Mixer |
| PCB [2] | 108777 Evaluation PCB |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in this application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation board should be mounted to an appropriate heat sink. The evaluation circuit board shown is available from Hittite upon request.



MICROWAVE CORPORATION v04.0414



HMC264LC3B

**GaAs MMIC SUB-HARMONIC
SMT MIXER, 21 - 31 GHz**

MIXERS - SUBHARMONIC - SMT



Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331