

Accessories Slim Interface Relay SNR

- Module width 6.2 mm
- Reduced system width for increased packing density on the DIN rail
- DC and AC version
- Electrical indicator as standard (LED)
- Protection circuit
- Screw- or cage clamp terminals
- Jumper bars
- RoHS compliant (Directive 2002/95/EC)



F0260-A


Approvals

VDE REG.-Nr. 6666, cULus E224918


Technical data

ST3F / ST4F

Rated current	6 A
Rated voltage / max.switching voltage AC	240 / 400 VAC
Dielectric strength coil-contact circuit	4000 V _{rms}
Clearance / creepage coil-contact circuit	≥ 6/8 mm
Material group of insulation parts	≥ IIIa
Insulation to IEC 60664-1	
Type of insulation coil-contact circuit	reinforced
open contact circuit	functional
Rated insulation voltage	250 V
Pollution degree	2
Rated voltage system	230 / 400 V
Overvoltage category	III
RoHS - Directive 2002/95/EC	compliant
Degree of protection DIN 40050	IP20
Ambient temperature range	-20...+55 °C
Terminals	screw / cage clamp
Terminal screw torque acc. IEC 61984	0.5 Nm
max.	0.6 Nm
Wire cross section	
single wire	0.14...2.5 mm ²
fine wire	0.14...2.5 mm ²
with bootlace crimp (DIN 46228/1)	0.14...2.5 mm ²
Insertion cycles	A (10)
Max. Insertion Force total	100 N
Mounting distance	0 mm, dense packing
Weight	26 g
Packaging unit	10 pcs

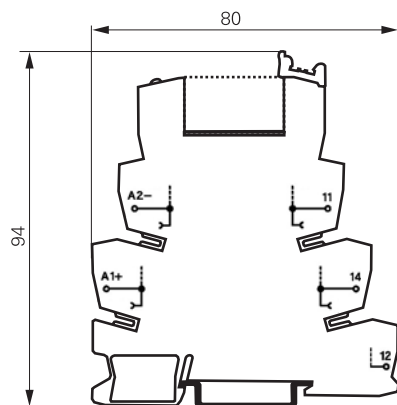

S0487-AA

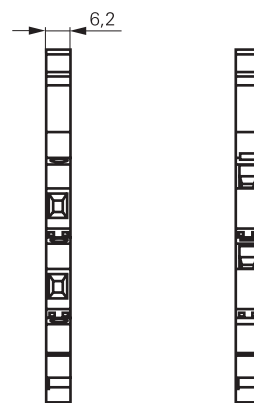

S0487-AA

Version with
screw terminals

Version with
cage clamp terminals

Sockets

Product code		Part Number
ST 3F LC4	Din-rail socket 24VDC, for relays 12 / 24 / 48 VDC, with LED, protection and polarity diode, screw terminals	2-1416100-0
ST 3F SM5	Din-rail socket 115 VAC / VDC with LED and protection circuit, screw terminals	2-1416100-1
ST 3F TP0	Din-rail socket 230 VAC / VDC with LED and protection circuit, screw terminals	2-1416100-2
ST 4F LC4	Din-rail socket 24VDC, for relays 12 / 24 / 48 VDC, with LED, protection and polarity diode, cage clamp terminals	2-1416100-3
ST 4F SM5	Din-rail socket 115 VAC / VDC with LED and protection circuit, cage clamp terminals	2-1416100-4
ST 4F TP0	Din-rail socket 230 VAC / VDC with LED and protection circuit, cage clamp terminals	2-1416100-5

Accessories Slim Interface Relay SNR (Continued)**Accessories**

Product code		Part Number
ST 36 040	Separation element	2-1416100-6
ST 37 001	Jumper bar, red, 500 mm	2-1416100-7
ST 37 002	Jumper bar, blue, 500 mm	2-1416100-8
ST 37 003	Jumper bar, grey, 500 mm	2-1416100-9
ST 37 040	Marking plate, consisting of 100 marking tabs	4-1416100-0

Relay Packages

Complete packages consisting of a relay mounted on a socket: see Relay Package SNR



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331