

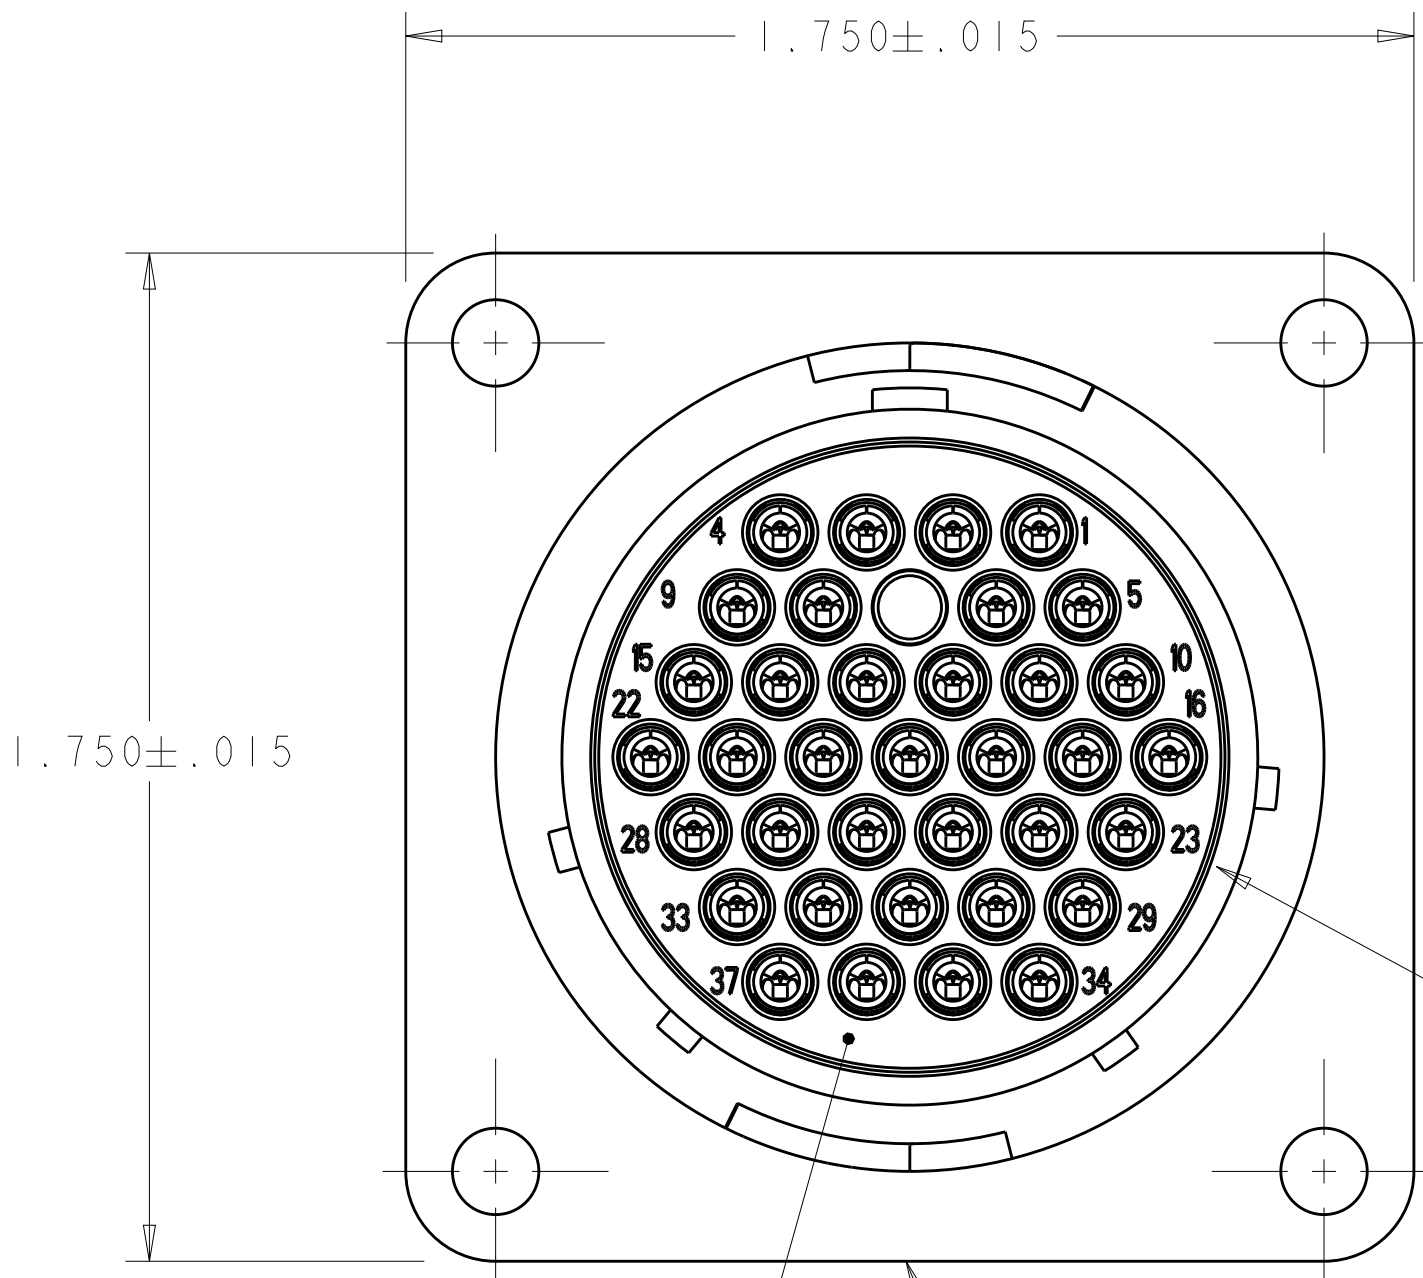
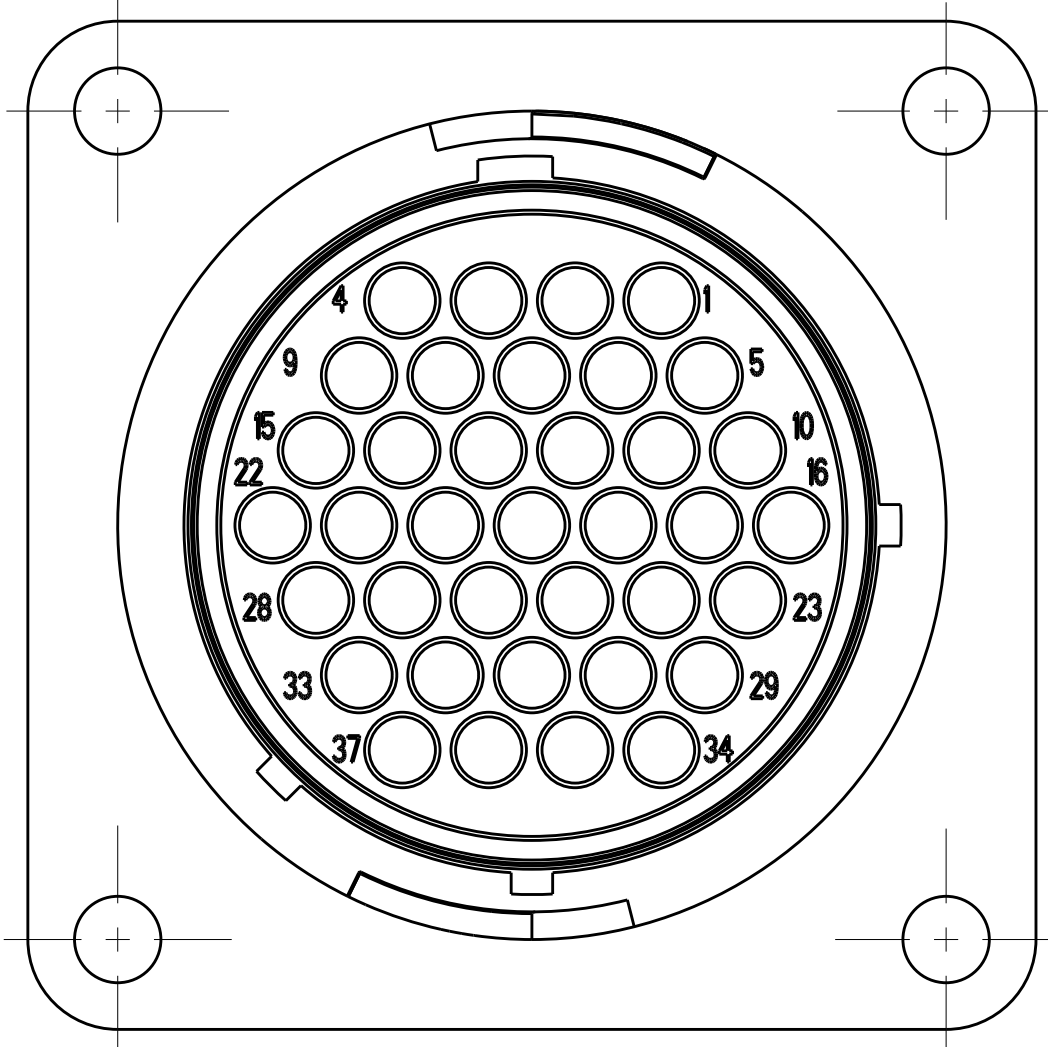


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	W	REVISED PER ECO-12-015665	26SEP12	KH	MZ
	Y	REVISED PER ECO-16-018356	23MAR2017	RS	MZ

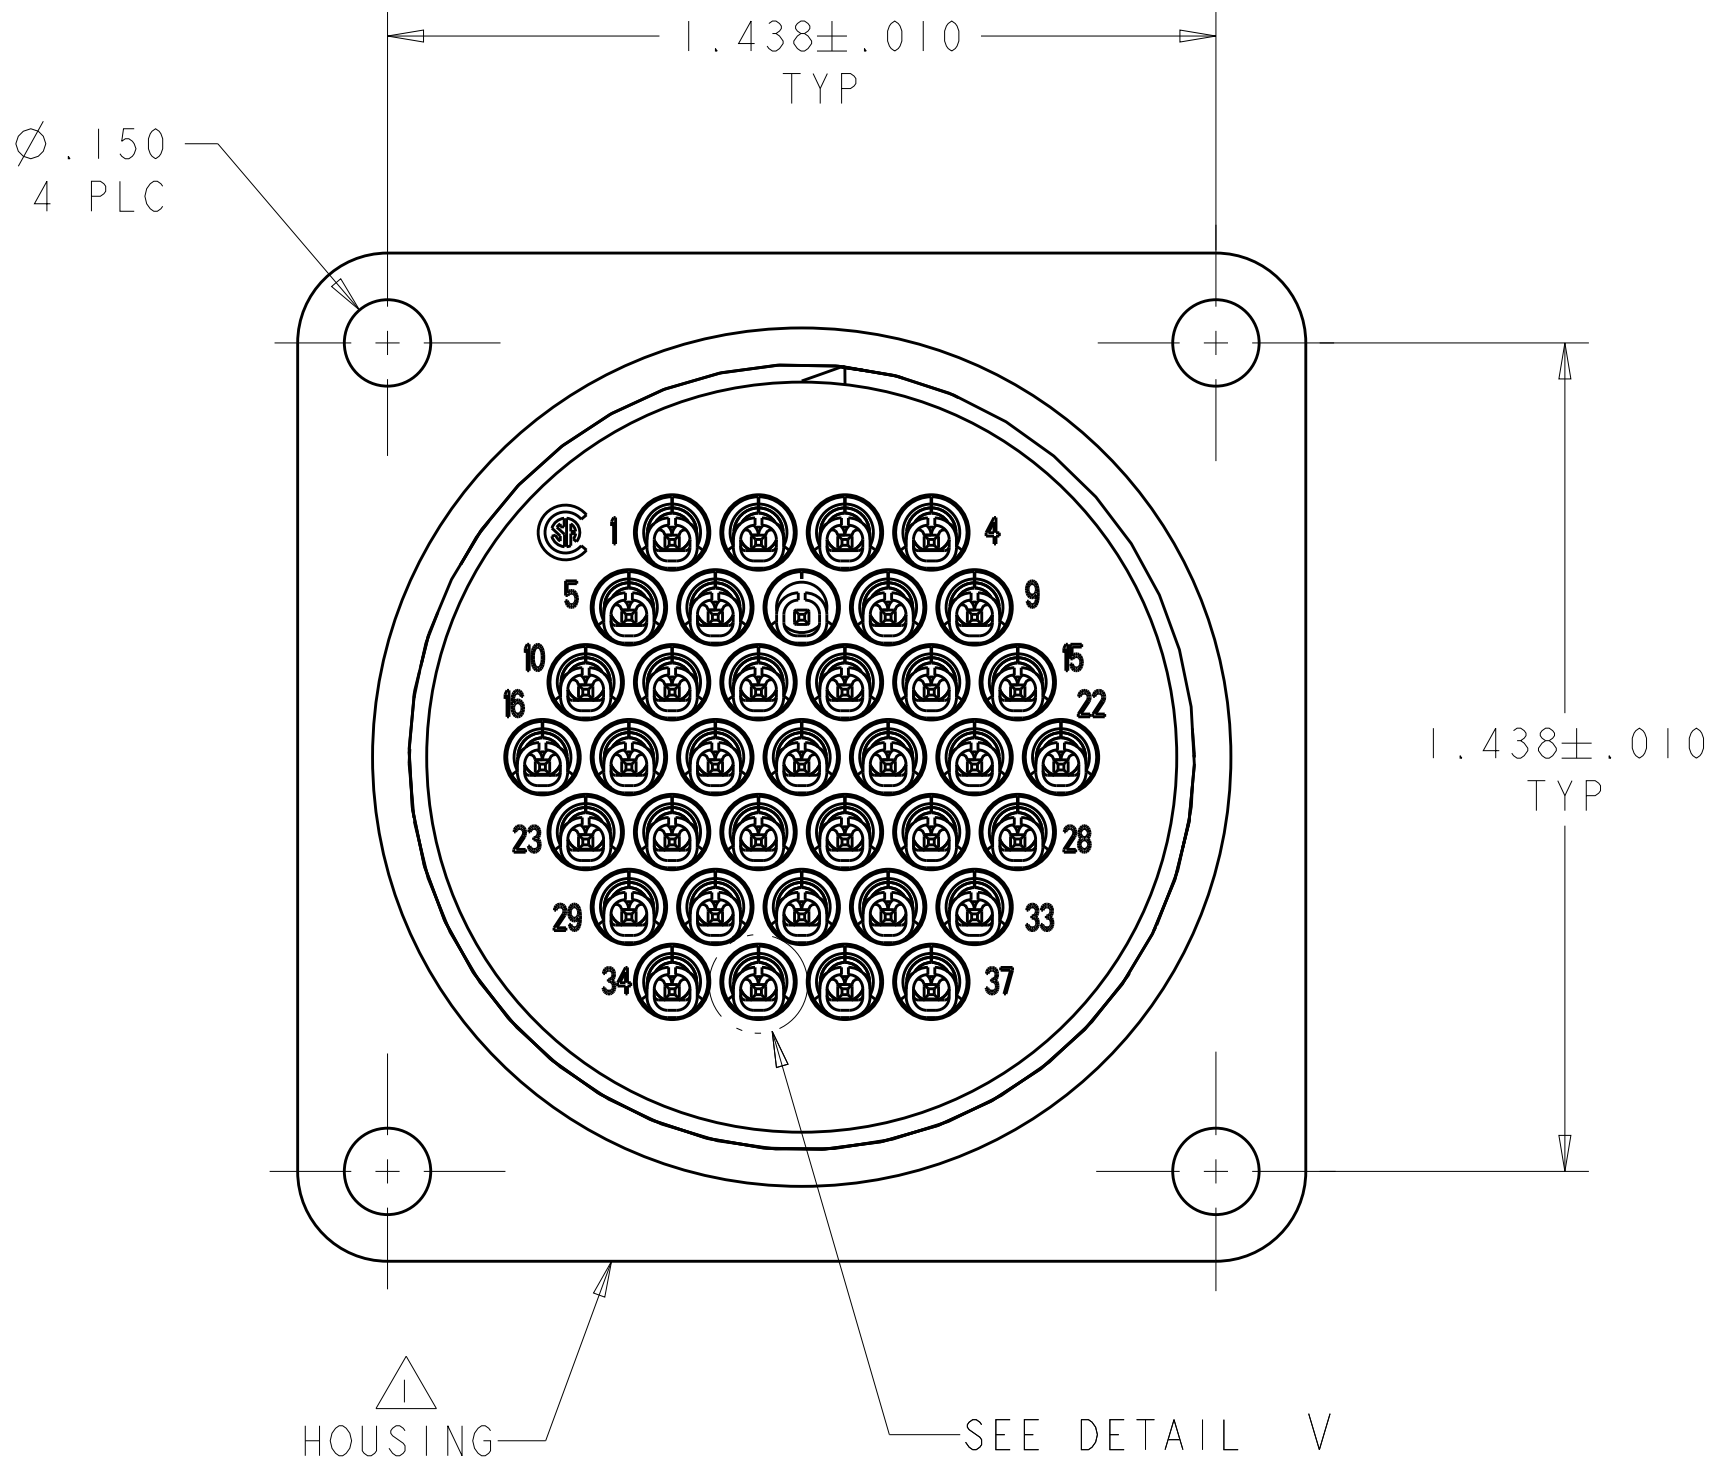

"A" STYLE KEYING

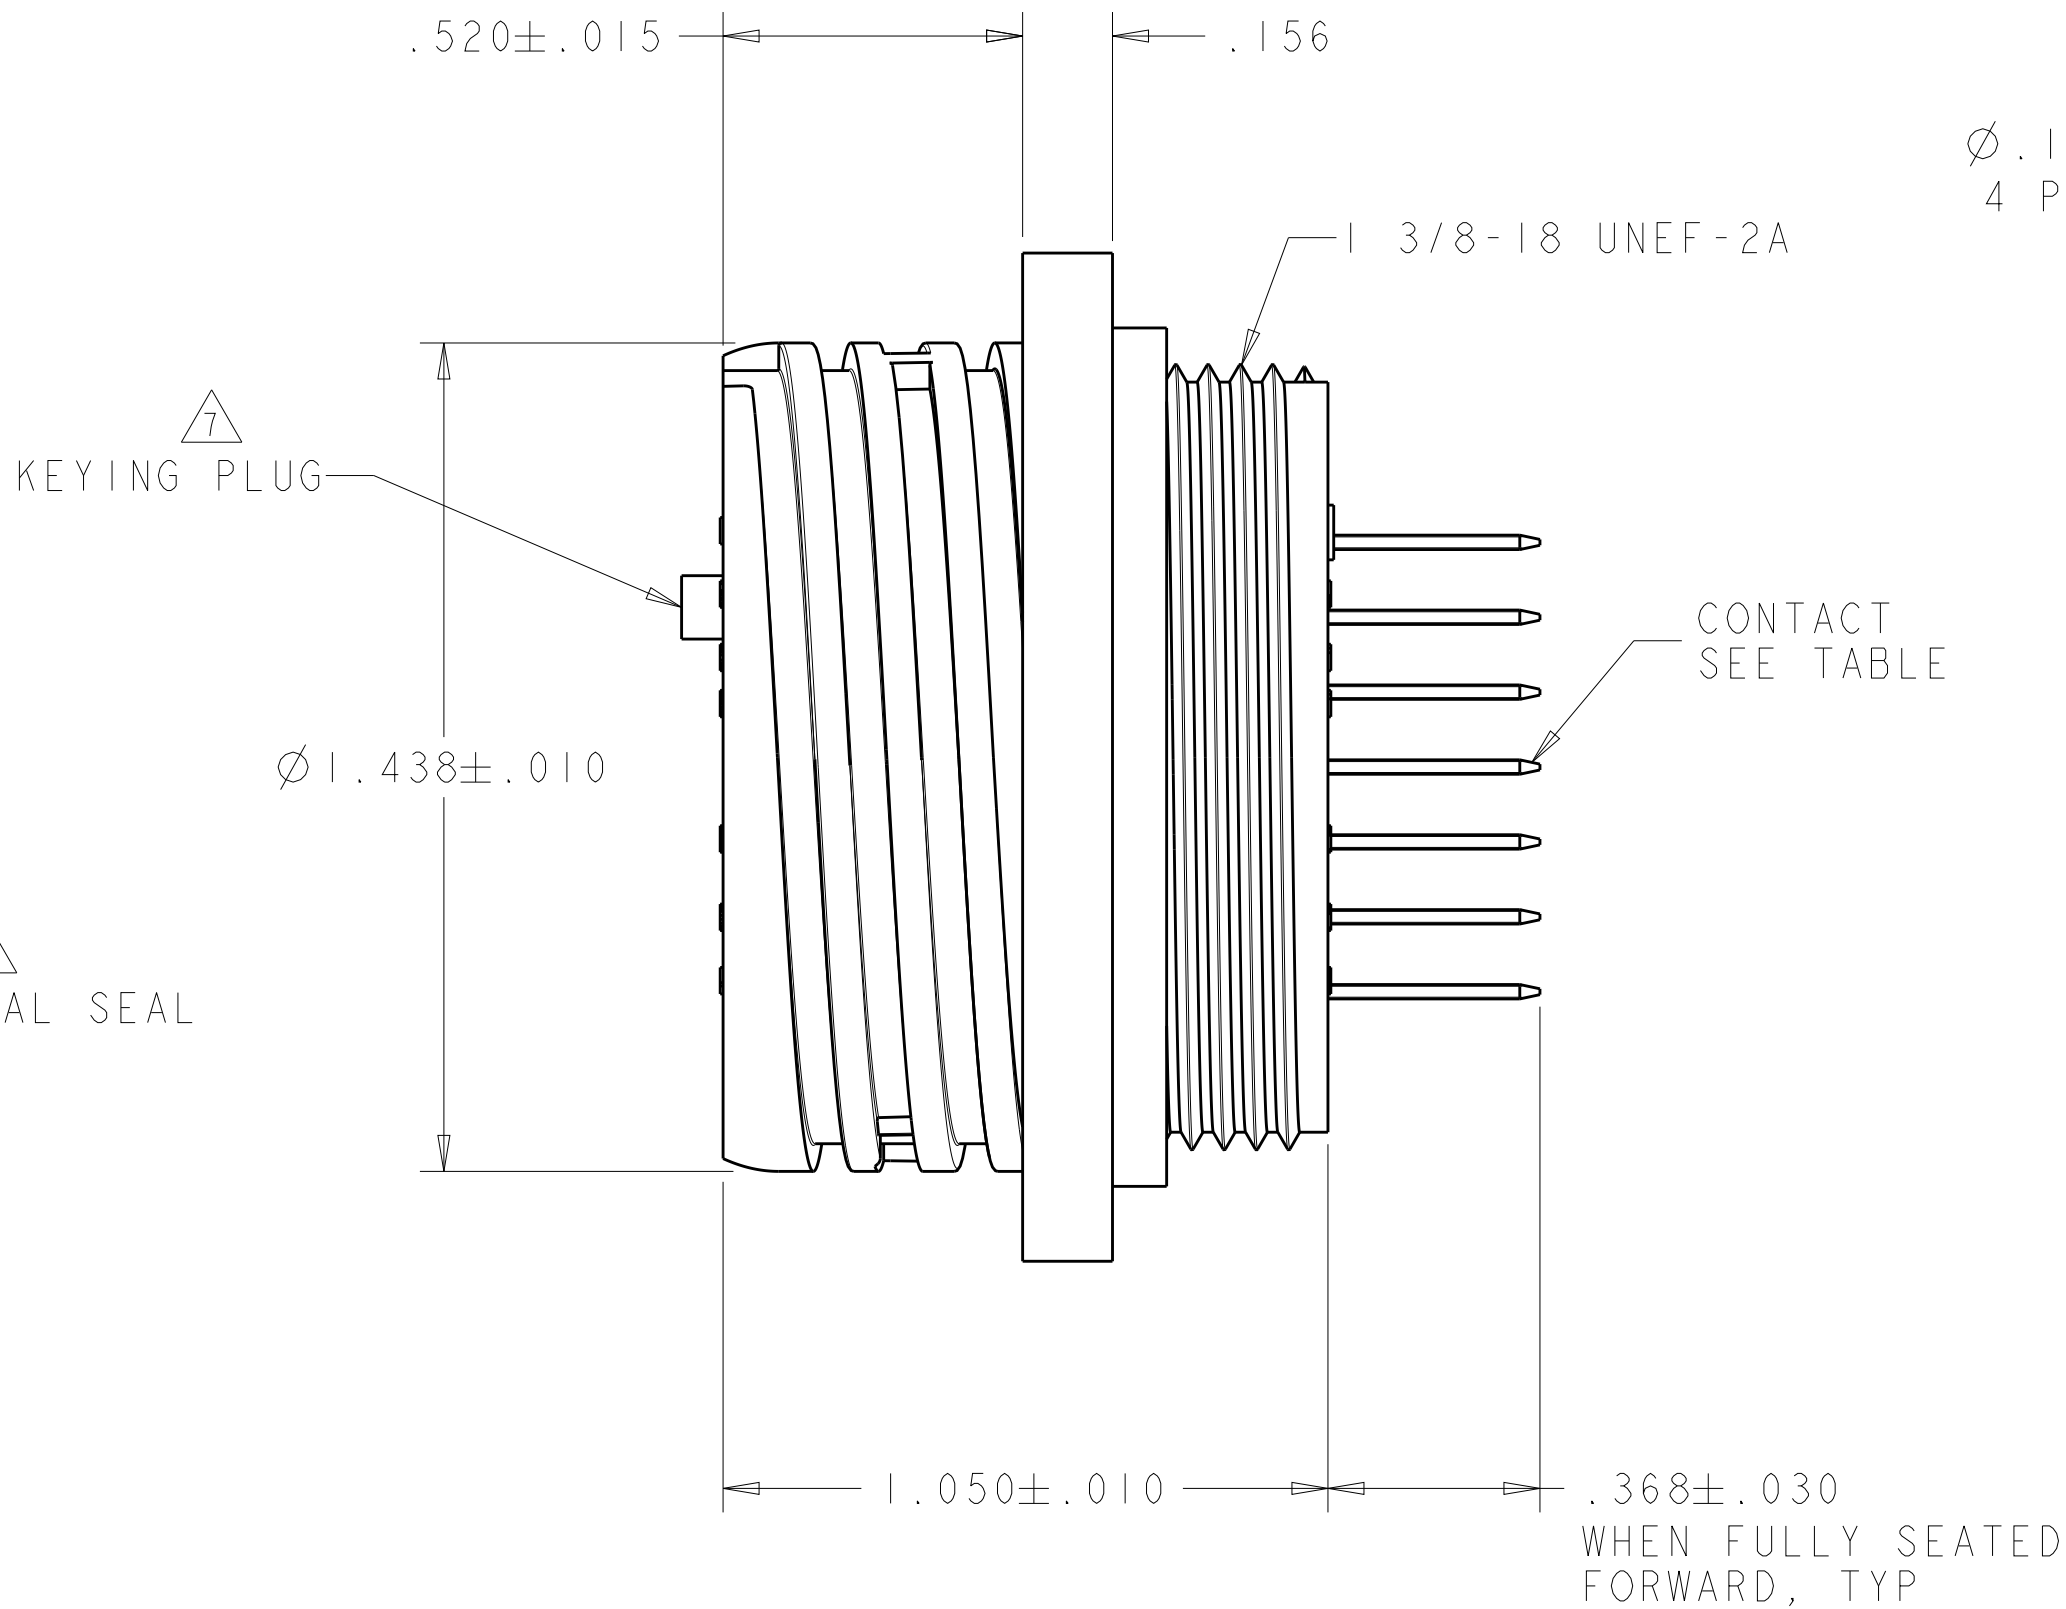


"B" STYLE KEYING

- △ HOUSING: THERMOPLASTIC, COLOR: BLACK.
- △ CONTACT:
BODY - .000100 MIN TIN-LEAD OVER .000050 MIN NICKEL.
POST - .000100 MIN TIN-LEAD OVER .000050 MIN NICKEL.
- △ CONTACT:
BODY - .000030 MIN GOLD FOR A LENGTH OF .200 MIN FROM MATING END, .000005 MIN GOLD ON REMAINDER ALL OVER .000030 MIN NICKEL.
POST - .000100 MIN TIN-LEAD OVER .000050 MIN NICKEL.
- △ CONTACT:
BODY - .000100 MIN TIN-LEAD OVER .000050 MIN NICKEL.
POST - .000030 MIN GOLD OVER .000050 MIN NICKEL.
- △ CONTACT:
BODY - .000100 MIN TIN OVER .000050 MIN NICKEL.
POST - .000100 MIN TIN OVER .000050 MIN NICKEL.
- △ PERIPHERAL SEAL: ELASTOMER, COLOR: GRAY.
- △ KEYING PLUG: NYLON, COLOR: NATURAL.
- △ .009 MAXIMUM CONTACT LEAD-IN SEAM GAP PERMISSIBLE ON MATING FACE END.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI


OBSOLETE	YES	B	POSN 7	△5	1-6,8-37	1-213828-9
	YES	A	-	△5	1-22,29-37	1-213828-8
	YES	A	-	△5	ALL	1-213828-6
	YES	B	POSN 7	△5	1-6,8-37	1-213828-5
	YES	A	-	△5	1-22,29-37	1-213828-4
	YES	A	POSN 15	△5	1-14,16-37	1-213828-3
	YES	B	POSN 7	△2	2-6,8-37	1-213828-2
	YES	B	POSN 7	△2	1-6,8-37	1-213828-1
△9	YES	A	-	△2	1-22,29-37	1-213828-0
	YES	A	-	△4	ALL	213828-9
	YES	B	POSN 7	△2	2-6,8-37	213828-8
	NO	A	-	△3	1-22,29-37	213828-7
	NO	B	POSN 7	△3	1-6,8-37	213828-6
	NO	A	POSN 15	△3	1-14,16-37	213828-5
	YES	B	POSN 7	△2	1-6,8-37	213828-4
	YES	A	POSN 15	△2	1-14,16-37	213828-3
△9	YES	A	-	△2	1-22,29-37	213828-2
△9	YES	A	-	△2	ALL	213828-1
PERIPHERAL SEAL		KEYING STYLE	KEYING PLUG	CONTACT FINISH	SELECT LOADED IN POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. WELDON 22MAY2003	TE Connectivity	
DIMENSIONS: INCHES		CHK S. HEADER 22MAY2003		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. HEADER 22MAY2003	NAME RECEPTACLE ASSEMBLY, POSTED, REVERSE SEX, SERIES 1, 23-37, CPC	
0 PLC ±.0		PRODUCT SPEC 108-10024		
1 PLC ±0.0		APPLICATION SPEC 114-10004	SIZE CAGE CODE DRAWING NO	
2 PLC ±0.00		WEIGHT		
3 PLC ±0.010		CUSTOMER DRAWING	SCALE 3:1 SHEET 1 OF 2 REV Y	
4 PLC ±0.0000				
ANGLES ±.0000				
FINISH				


REVISIONS					
P.	LTR.	DESCRIPTION	DATE	DWN.	APVD.
-	-	SEE SHEET 1	-	-	-

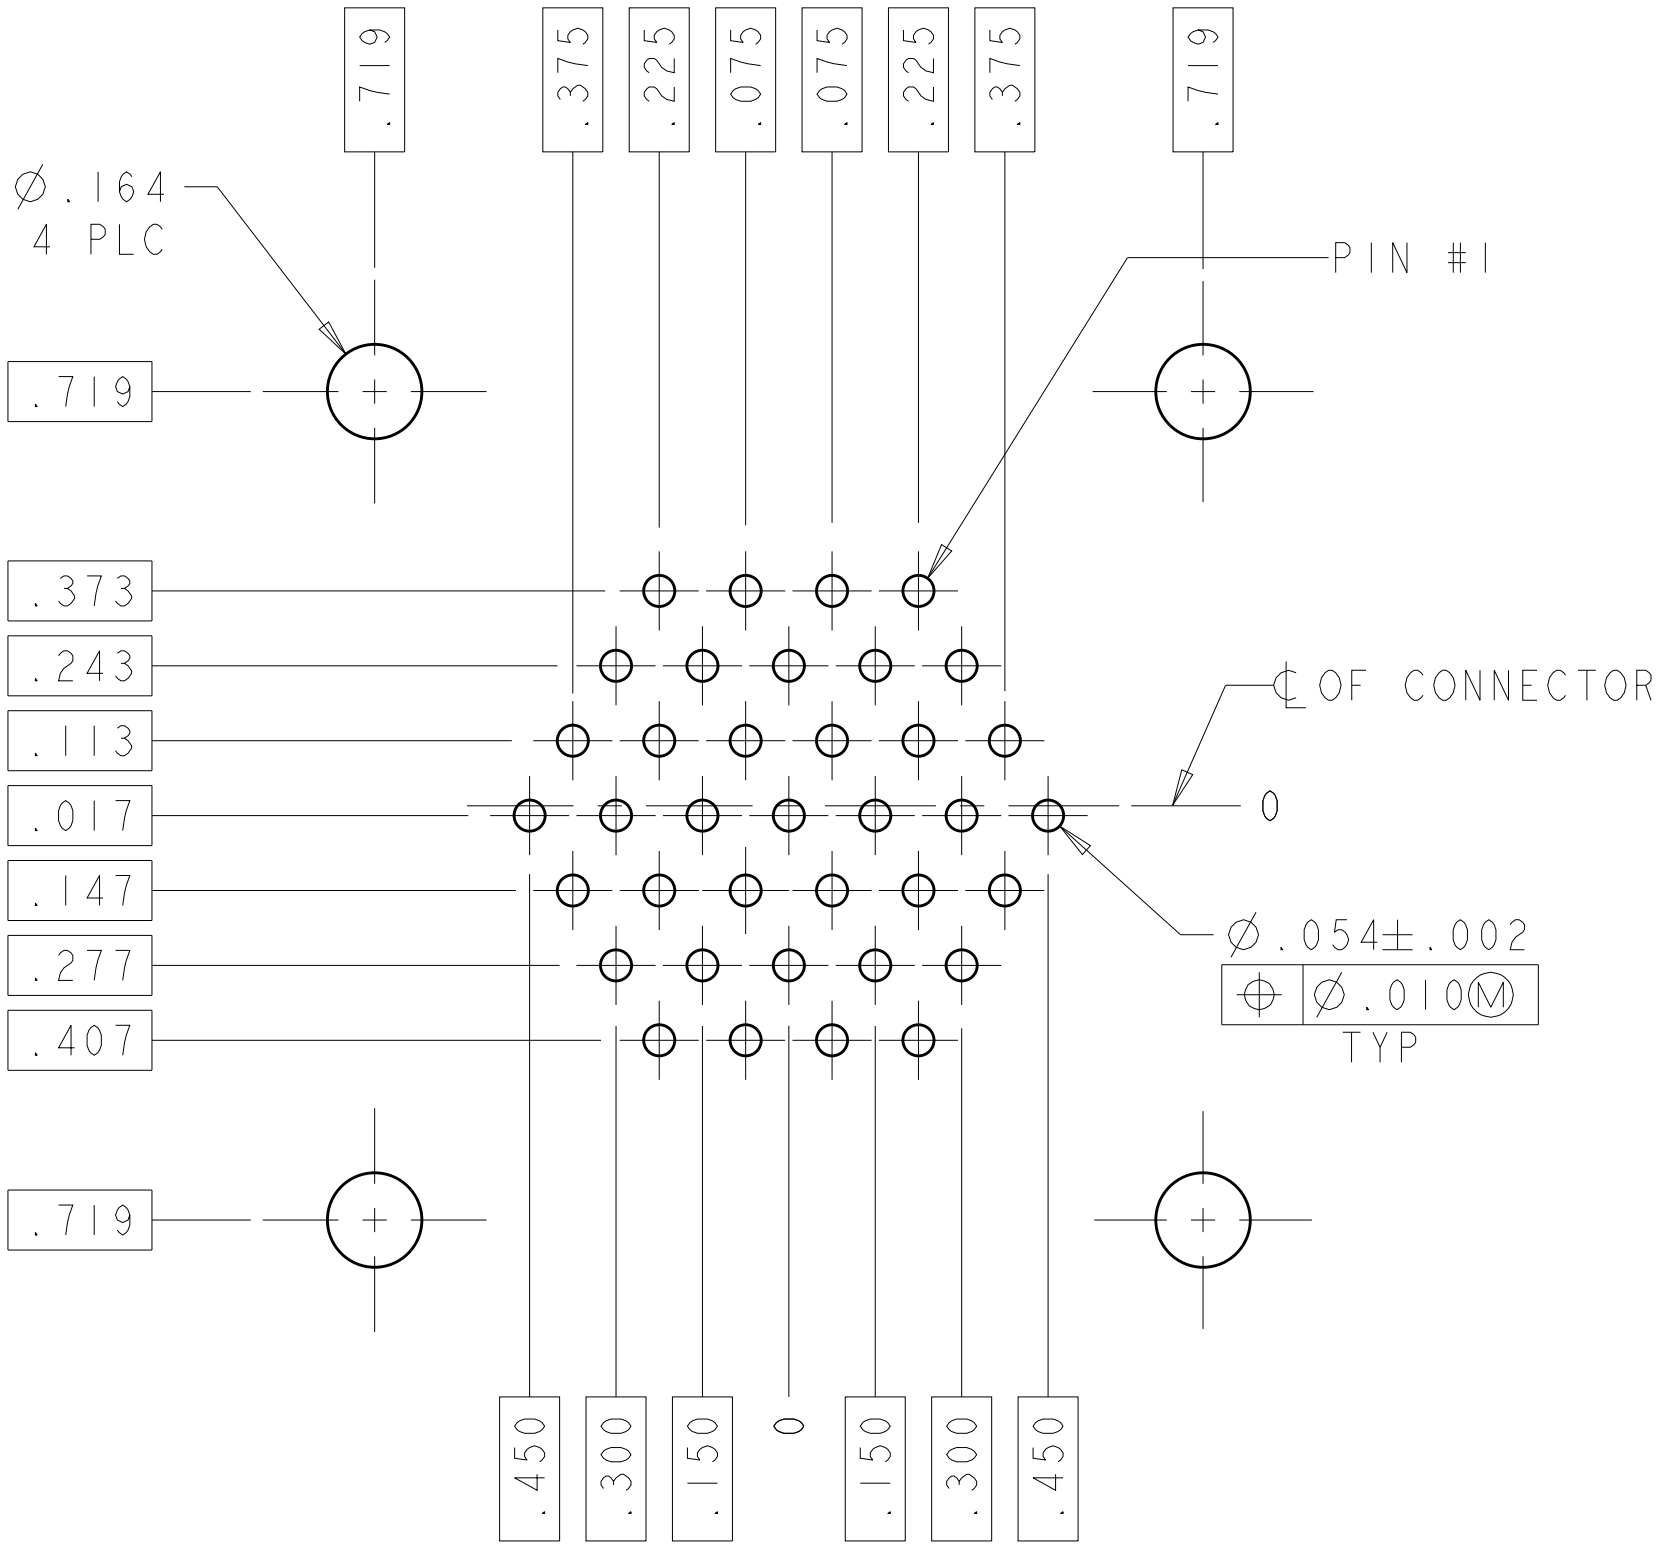

RECOMMENDED PC BOARD LAYOUT

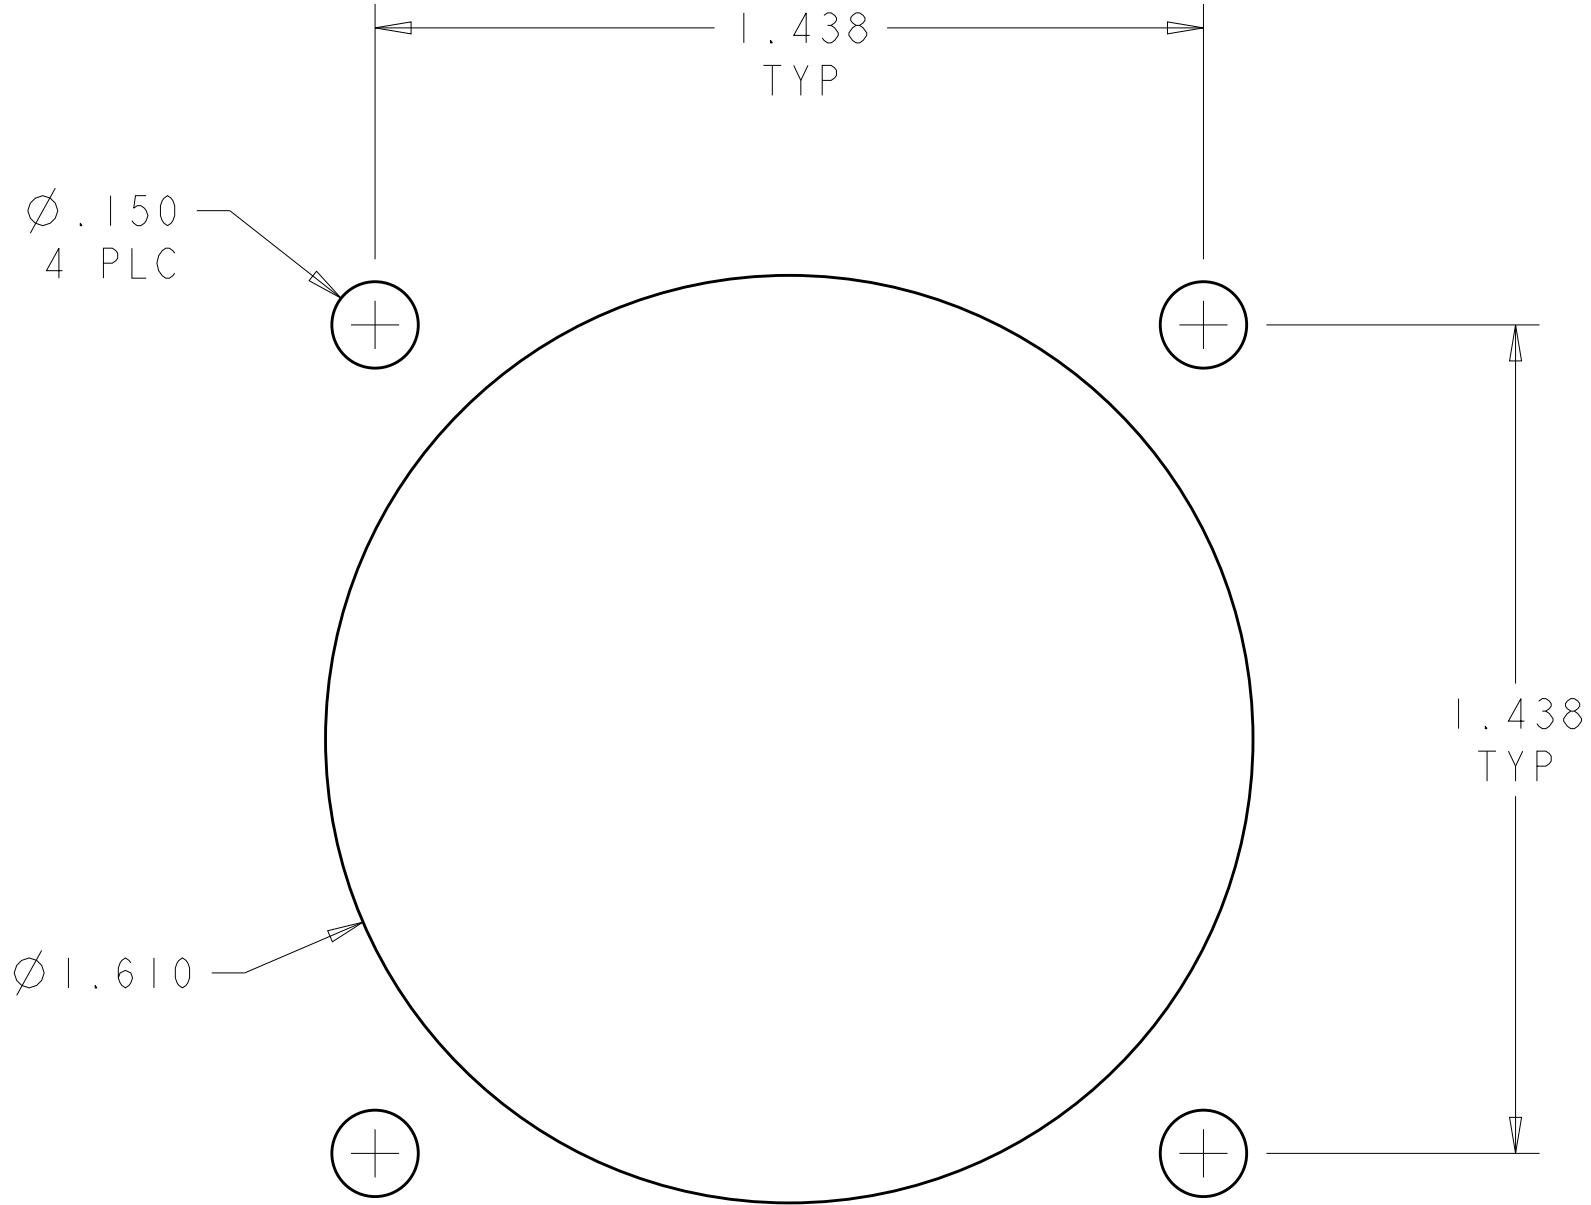

RECOMMENDED PANEL CUTOUT
.125 MAX PANEL THICKNESS

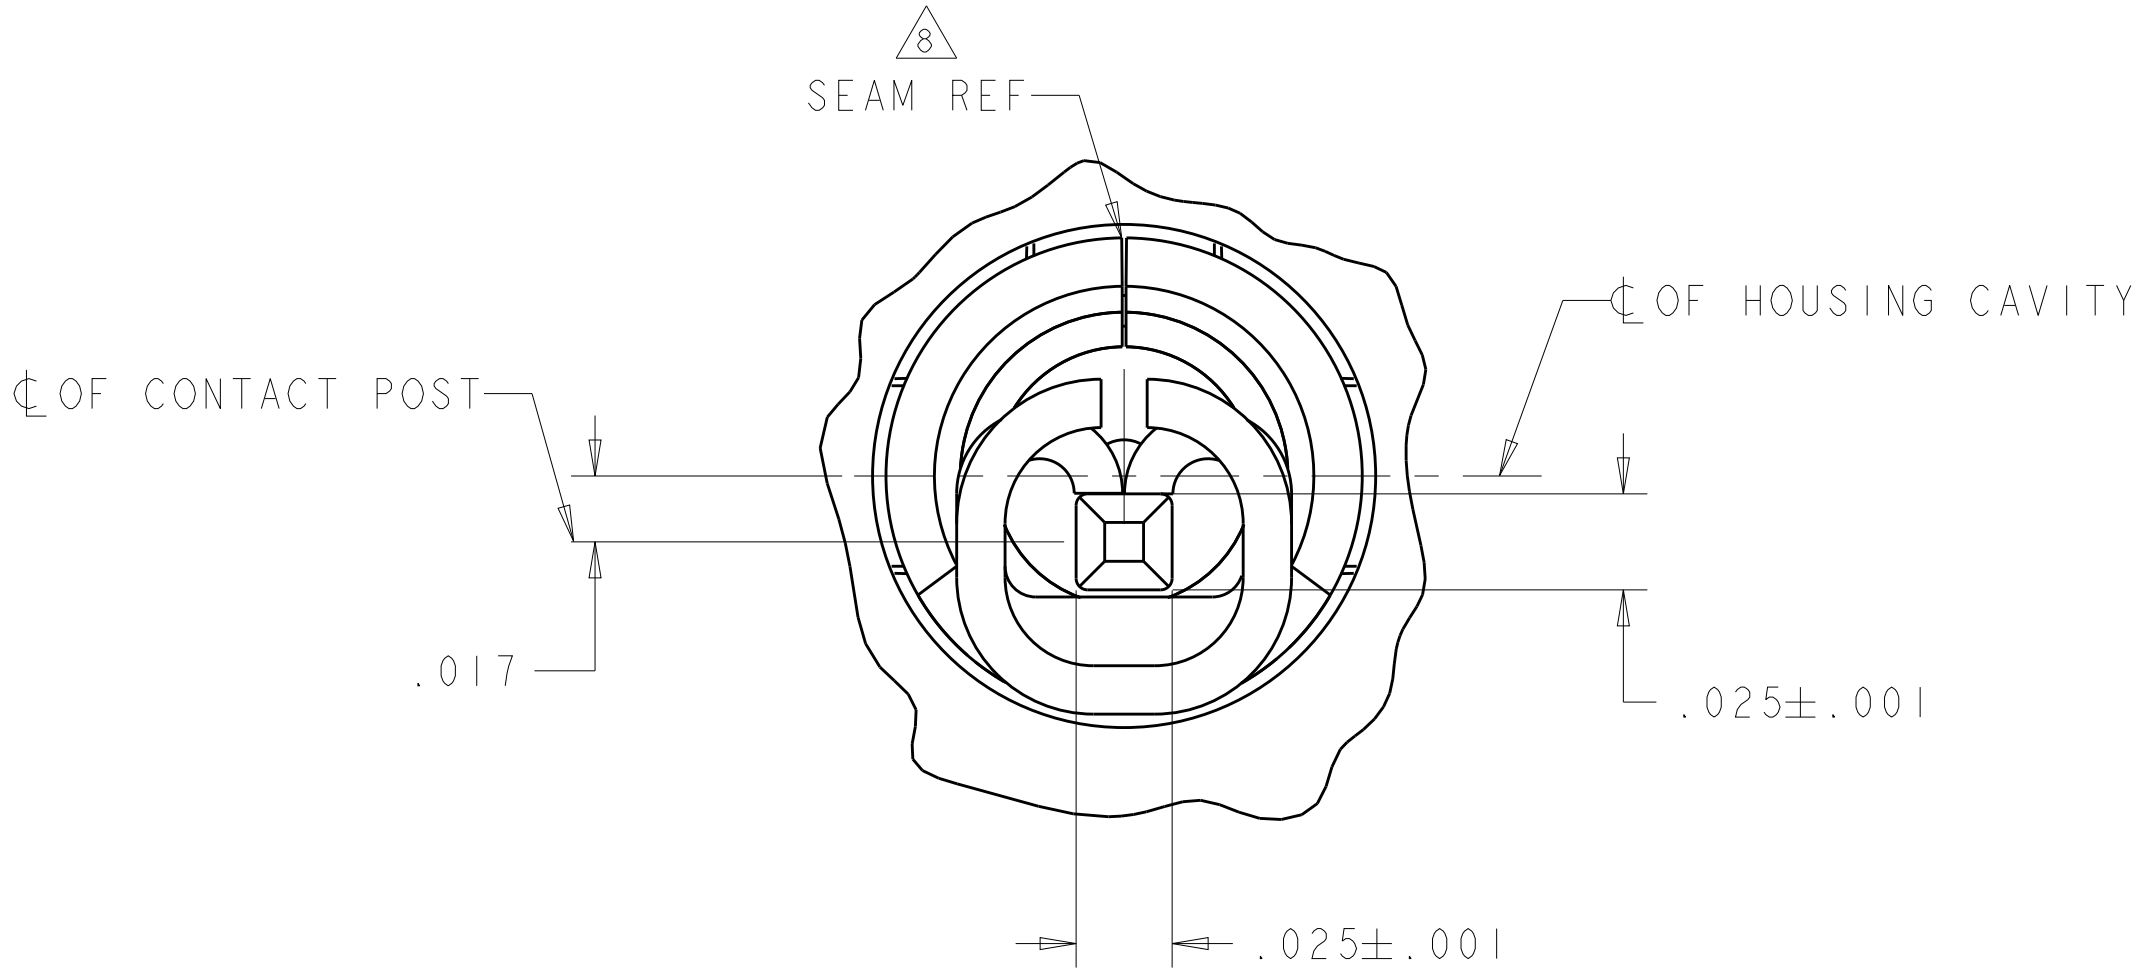

DETAIL V
SCALE 20:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. WELDON 22MAY2003	TE Connectivity	
		CHK S. HEADER 22MAY2003		
DIMENSIONS:		APVD S. HEADER 22MAY2003	NAME RECEPTACLE ASSEMBLY, POSTED, REVERSE SEX, SERIES 1, 23-37, CPC	
INCHES		PRODUCT SPEC		
		108-10024	SIZE A100779C=213828	
		APPLICATION SPEC		
MATERIAL		114-10004	SCALE 3:1 SHEET 2 OF 2 REV Y	
		WEIGHT		
		CUSTOMER DRAWING		



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331