

Cable gland - G-EDSWU-M20S-S66L-STES-S - 1411089

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Cable gland, Cable gland material: Stainless steel 1.4404, Application: Ex, External cable diameter 9.5 mm ... 15.9 mm, Shielding: Yes, Connecting thread: M20, Color: silver

Product Features



Key commercial data

Packing unit	1 pc
Minimum order quantity	10 pc
Weight per Piece (excluding packing)	174.0 GRM
Custom tariff number	73269098
Country of origin	United Kingdom

Technical data

Dimensions

Length	85 mm
Length without connecting thread	70 mm
Connecting thread diameter	20 mm
Wrench size, union nut	24 mm
Wrench size, support	24 mm
Hexagon angular dimension GRP	26.4 mm
Length of the connecting thread	15 mm
External cable diameter	9.5 mm ... 15.9 mm
Cable diameter without cable sheath	6.1 mm ... 11.7 mm

Ambient conditions

Cable gland - G-EDSWU-M20S-S66L-STES-S - 1411089

Technical data

Ambient conditions

Degree of protection	IP66 (using the A-SEW-...P-W flat gasket (e.g., 1411283))
	IP67 (in the case of feed-through holes, a sealing ring should also be installed in order to maintain the degree of protection (e.g., item 1411283).)
	IP68 (in the case of feed-through holes, a sealing ring should also be installed in order to maintain the degree of protection (e.g., item 1411283).)
Ambient temperature (operation)	-60 °C ... 130 °C

General

Cable gland material	Stainless steel 1.4404
Seal material	Thermoplastic elastomers
O-ring material	Viton
Thread type on connection side	M20
Color	silver
Standards/specifications	EN 60079-0, -1, -7, -15, -31
	IEC 60079-0, -1, -7, -15, -31
	EN 50262
	IEC 62444
	BS 6121: Part 1:1989
ATEX	Sira 13ATEX1073X
	Sira 13ATEX4079X
	Ex II 2G, II 1D, Ex d IIC Gb, Ex e IIC Gb, Ex ta IIIC Da, Ex II 3G Ex nR IIC Gc, Ex I M2, Ex d I Mb, Ex e I Mb
IECEX	IECEX SIR 13.0028X
	Ex d IIC Gb, Ex e IIC Gb, Ex nR IIC Gc, Ex ta IIIC Da, Ex d I Mb, Ex e I Mb

Classifications

eCl@ss

eCl@ss 5.1	27149109
eCl@ss 6.0	27149109
eCl@ss 8.0	27149109

ETIM

ETIM 4.0	EC000441
ETIM 5.0	EC000441

Approvals

Approvals

Cable gland - G-EDSWU-M20S-S66L-STE-S - 1411089

Approvals

Approvals

UL Listed

Ex Approvals

IECEEx / ATEX / INMETRO / CSA / CSAus / NEPSI / EAC Ex / CIDET / cCSAus


Approvals submitted

Approval details

UL Listed

Drawings

Dimensional drawing

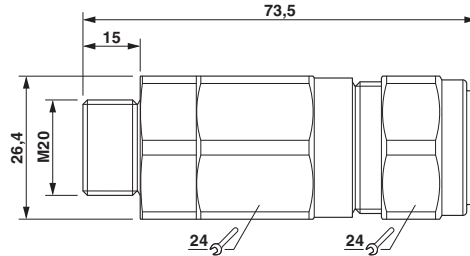



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331