

# DATA SHEET

## SURFACE-MOUNT CERAMIC MULTILAYER CAPACITORS

C-Array

NP0/X7R/Y5V

16 V TO 50 V

sizes 0508 (4 x 0402) / 0612 (4 x 0603)

RoHS compliant & Halogen Free



**SCOPE**

This specification describes NP0/X7R/Y5V 4-capacitor Array with lead-free terminations.

**APPLICATIONS**

- Professional electronics
- High density consumer electronics

**FEATURES**

- Supplied in tape on reel
- Nickel-barrier end termination
- 0508 (4x0402) / 0612 (4x0603) capacitors (of the same capacitance value) per array
- Less than 50% board space of an equivalent discrete component
- High volumetric efficiency
- Increased throughput, by time saved in mounting
- RoHS compliant
- Halogen Free compliant

**ORDERING INFORMATION - GLOBAL PART NUMBER, PHYCOMP**

**CTC & I2NC**

All part numbers are identified by the series, size, tolerance, TC material, packing style, voltage, process code, termination and capacitance value. Please note that 12 digits ordering code will expire at the end of 2010.

**YAGEO BRAND ordering code**

**GLOBAL PART NUMBER (PREFERRED)**

**CA** XXXX X X XXX X **B** X XXX  
 (1) (2) (3) (4) (5) (6) (7)

**(1) SIZE – INCH BASED (METRIC)**

0508 (1220)  
 0612 (1632)

**(2) TOLERANCE**

J = ±5%  
 K = ±10%  
 M = ±20%  
 Z = -20% to +80%

**(3) PACKING STYLE**

R = Paper/PE taping reel; Reel 7 inch

**(4) TC MATERIAL**

NPO  
 X7R  
 Y5V

**(5) RATED VOLTAGE**

7 = 16 V  
 8 = 25 V  
 9 = 50 V

**(6) PROCESS**

N = NPO  
 B = X7R / Y5V

**(7) CAPACITANCE VALUE**

2 significant digits+number of zeros  
 The 3rd digit signifies the multiplying factor, and letter R is decimal point  
 Example: 121 = 12 × 10<sup>1</sup> = 120 pF


**PHYCOMP BRAND ordering codes**

GLOBAL PART NUMBER (preferred), PHYCOMP CTC (for North America) and I2NC (traditional) codes are acceptable to order Phycomp brand products.

**GLOBAL PART NUMBER (PREFERRED)**

For detailed information of GLOBAL PART NUMBER and ordering example, please refer to page 2.

**I2NC CODE**

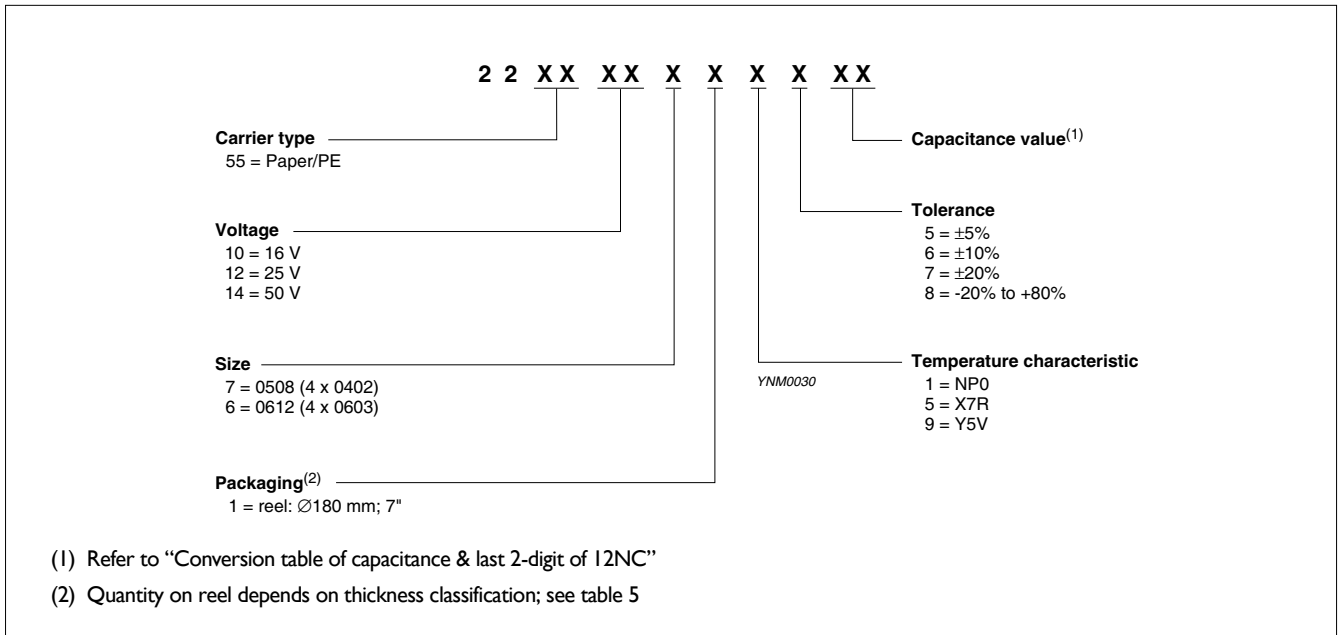

**PHYCOMP CTC CODE (FOR NORTH AMERICA)**

🔗 Example: 0508CG220K9B200


0508	CG	220	K	9	B	2	0	0
Size code	Temp. Char.	Capacitance in pF	Tolerance	Voltage	Termination	Packing	Marking	Range identifier
0508 (4 x 0402)	CG = NP0 2R = X7R	101 = 100 pF; the third digit signifies the multiplying factor:	J = ±5% K = ±10% M = ±20% Z = -20% to +80%	7 = 16 V 8 = 25 V 9 = 50 V	B = NiSn	2 = 180 mm 7" Paper/PE	0 = no marking	0 = conv. Ceramic D = Class 2 MLCC
0612 (4 x 0603)	2F = Y5V	0 = × 1 1 = × 10 2 = × 100 3 = × 1,000						

**CONSTRUCTION**

The capacitor consists of a rectangular block of ceramic dielectric in which a number of interleaved metal electrodes are contained. This structure gives rise to a high capacitance per unit volume.

The inner electrodes are connected to the two end terminations and finally covered with a layer of plated tin (NiSn).

The terminations are lead-free. An outline of the structure is shown in Fig.1.

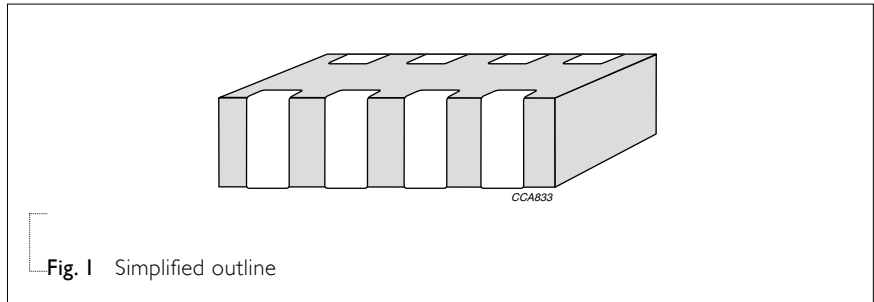


**DIMENSIONS**

Table I

TYPE	0508 (4 X 0402)	0612 (4 X 0603)
L (mm)	2.0 ±0.15	3.2 ±0.15
W (mm)	1.25 ±0.15	1.60 ±0.15
T <sub>min.</sub> (mm)	0.50	0.70
T <sub>max.</sub> (mm)	0.70	0.90
A (mm)	0.28 ±0.10	0.4 ±0.10
B (mm)	0.2 ±0.10	0.3 ±0.20
P (mm)	0.5 ±0.10	0.8 ±0.10

**OUTLINES**

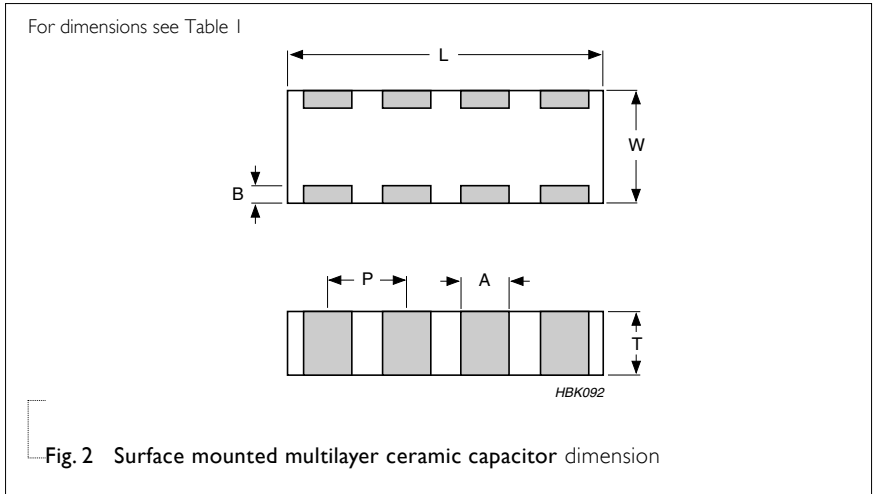

**CAPACITANCE RANGE & THICKNESS FOR 4C-ARRAY**

Table 2 Temperature characteristic material from NP0

CAPACITANCE	Last 2-digit of	0508 (4 x 0402)		0612 (4 x 0603)	
		I2NC	50 V		50 V
10 pF	23				
15 pF	25				
18 pF	26				
22 pF	27				
33 pF	29				
39 pF	31				
47 pF	32				
56 pF	33		0.6±0.1		
68 pF	34				
82 pF	35				0.8±0.1
100 pF	36				
120 pF	37				
150 pF	38				
180 pF	39				
220 pF	41				
270 pF	42				
330 pF	43				
390 pF	44				
470 pF	45				
560 pF	46				
680 pF	47				
820 pF	48				
1.0 nF	49				

**NOTE**

Values in shaded cells indicate thickness class in mm

**CAPACITANCE RANGE & THICKNESS FOR 4C-ARRAY**

**Table 3** Temperature characteristic material from X7R

CAPACITANCE	Last 2-digit of	0508 (4 x 0402)		0612 (4 x 0603)	
		I2NC	16 V	16 V	25 V
180 pF	13				
220 pF	14				
270 pF	15				
330 pF	16				
390 pF	17				
470 pF	18				
560 pF	19				
680 pF	21				
820 pF	22				
1.0 nF	23				
1.2 nF	24				
1.5 nF	25				
1.8 nF	26				
2.2 nF	27				
2.7 nF	28				
3.3 nF	29		0.6±0.1		
3.9 nF	31				
4.7 nF	32				
5.6 nF	33				
6.8 nF	34				
8.2 nF	35				
10 nF	36				
12 nF	37				
15 nF	38				
18 nF	39				
22 nF	41				
27 nF	42				
33 nF	43		0.8±0.1		
47 nF	45				
56 nF	46				
68 nF	47				
82 nF	48				
100 nF	49				

**NOTE**

Values in shaded cells indicate thickness class in mm

CAPACITANCE RANGE & THICKNESS FOR 4C-ARRAY

Table 4 Temperature characteristic material from Y5V

CAPACITANCE	Last 2-digit of I2NC	0612 (4 x 0603)	25 V
10 nF	36	0.6±0.1	0.6±0.1
22 nF	41		
47 nF	45		
100 nF	49		

**NOTE**

Values in shaded cells indicate thickness class in mm

THICKNESS CLASSES AND PACKING QUANTITY

Table 5

SIZE CODE	THICKNESS CLASSIFICATION	TAPE WIDTH QUANTITY PER REEL	Ø180 MM / 7 INCH Paper
0508	0.6 ±0.1 mm	8 mm	4,000
0612	0.8 ±0.1 mm	8 mm	4,000

ELECTRICAL CHARACTERISTICS

**4C-ARRAY DIELECTRIC CAPACITORS; NISN TERMINATIONS**

Unless otherwise stated all electrical values apply at an ambient temperature of 20±1 °C, an atmospheric pressure of 86 to 106 kPa, and a relative humidity of 63 to 67%.


Table 6

DESCRIPTION	VALUE
Capacitance range	10 pF to 100 nF
Rated voltage	NP0 50 V
	X7R 0508: 16 V, 0612: 16 V to 50 V
	Y5V 0612: 25 V
Capacitance tolerance	NP0 ±5%, ±10%
	X7R ±10%, ±20%
	Y5V -20% to +80%
Dissipation factor (D.F.)	NP0 ≤ 0.1%
	X7R 16 V ≤ 3.5%, 25V ≤ 2.5%, 50V ≤ 2.5%
	Y5V 0508 ≤ 9%, 0612 ≤ 7%
Insulation resistance after 1 minute at U <sub>r</sub> (DC)	R <sub>ins</sub> ≥ 10 GΩ or R <sub>ins</sub> × C <sub>r</sub> ≥ 500 seconds whichever is less
Maximum capacitance change as a function of temperature (temperature characteristic/coefficient):	NP0 ±30 ppm/°C
	X7R ±15%
	Y5V +22% to -82%
Operating temperature range:	NP0 -55 °C to +125 °C
	X7R -55 °C to +125 °C
	Y5V -30 °C to +85 °C




**NP0 0508/0612 50 V**


Sample limits (broken lines)  
Requirement levels (dotted lines)

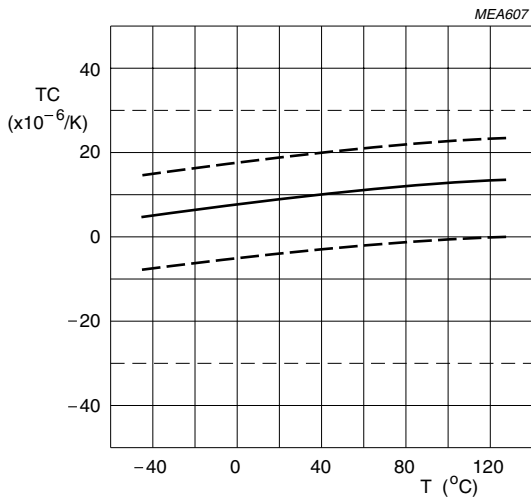

**Fig. 3** Typical temperature coefficient as a function of temperature



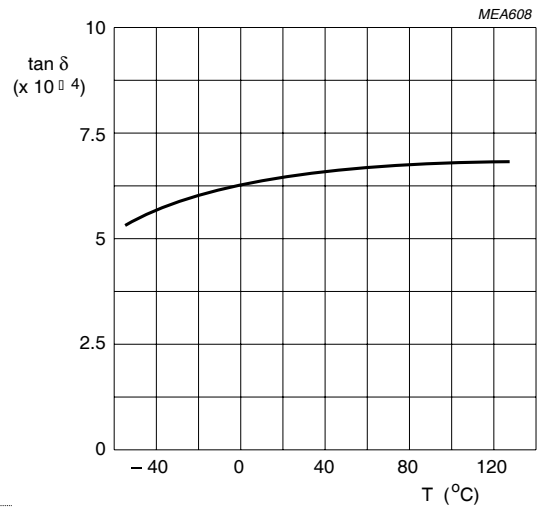


**Fig. 4** Typical tan δ as a function of temperature



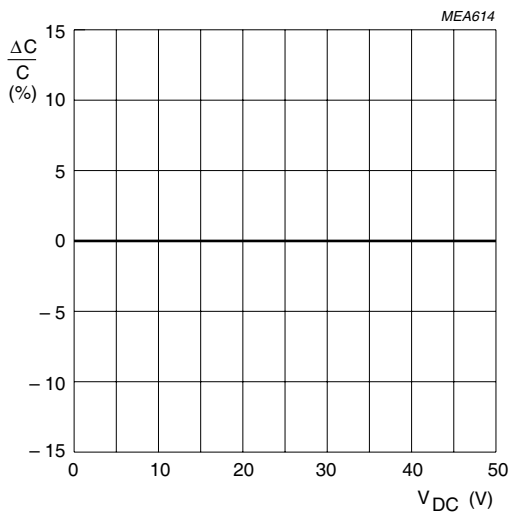


**Fig. 5** Typical capacitance change with respect to the capacitance at 1 V as a function of DC voltage




**X7R 0508 16 V**

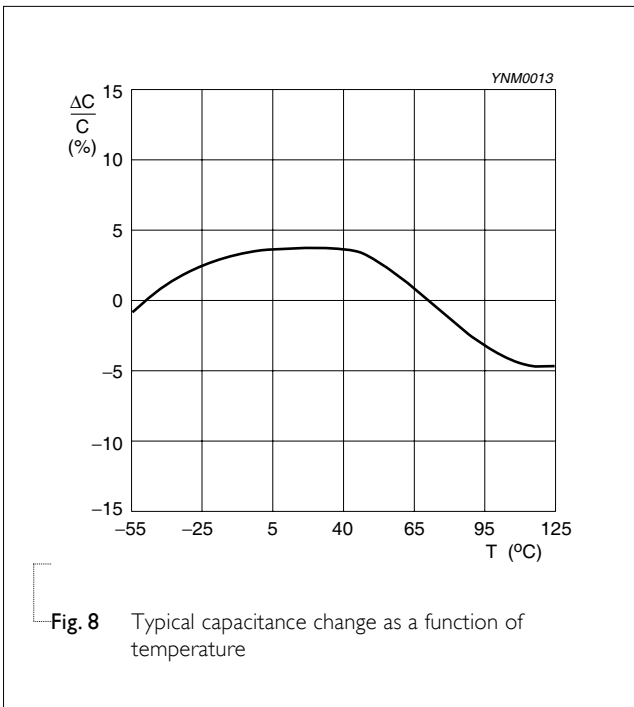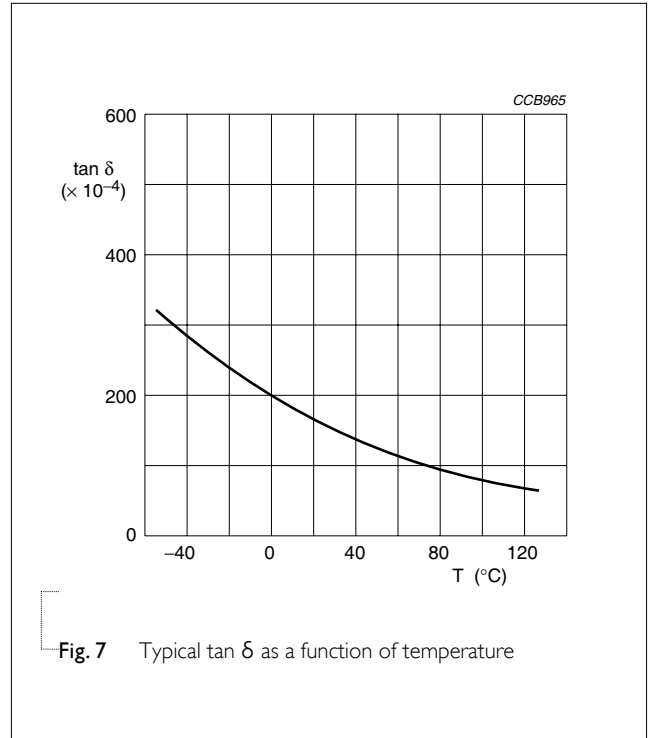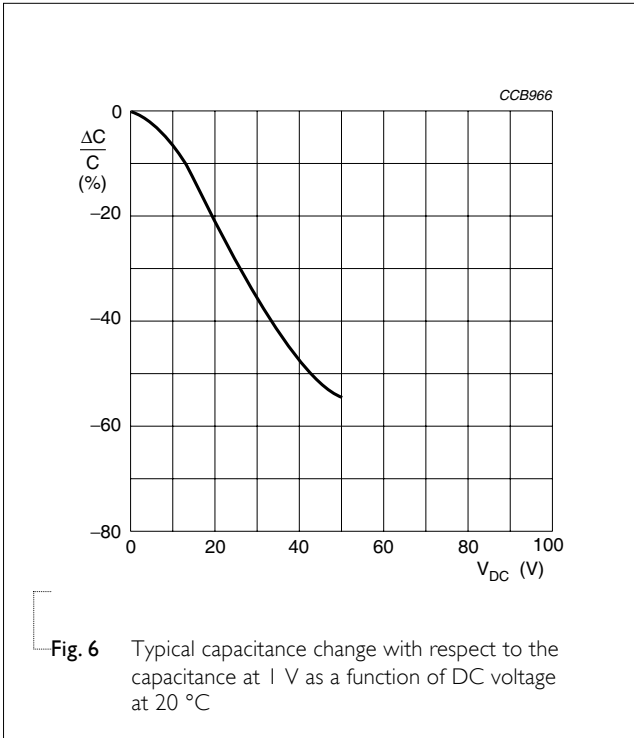

**X7R 0612 16 V to 50 V**

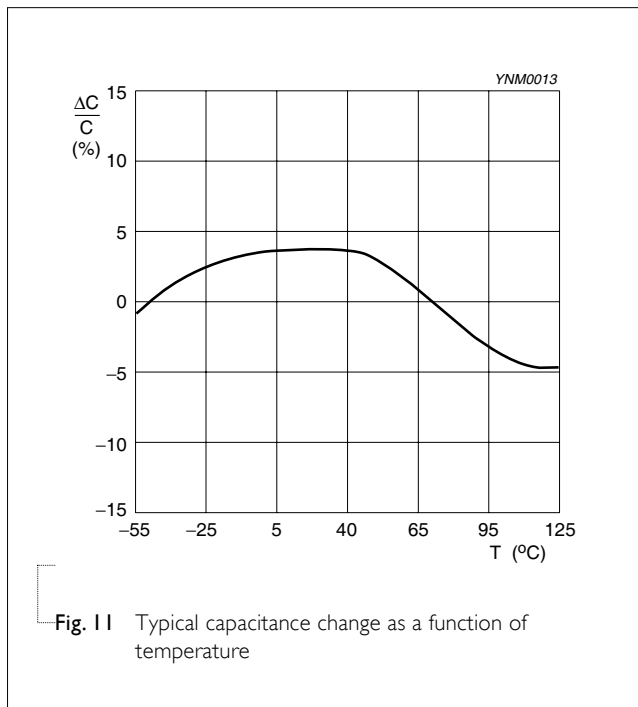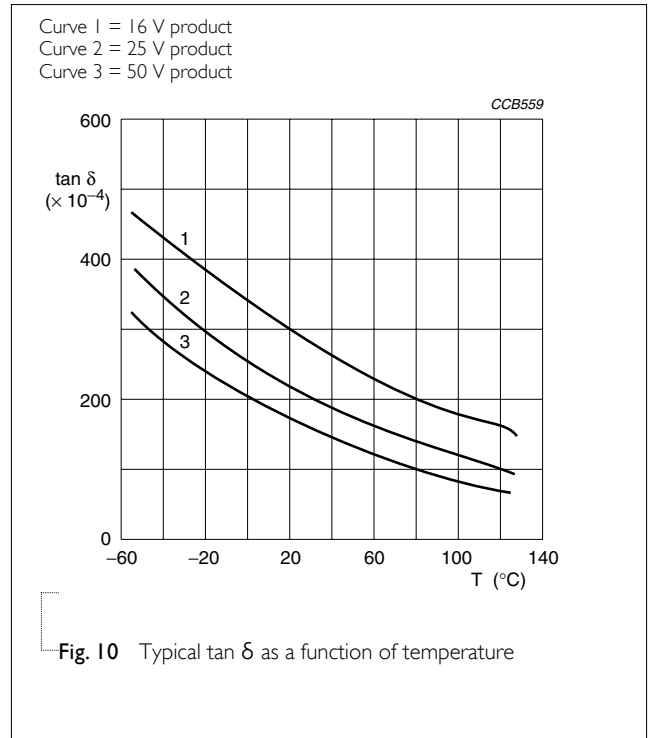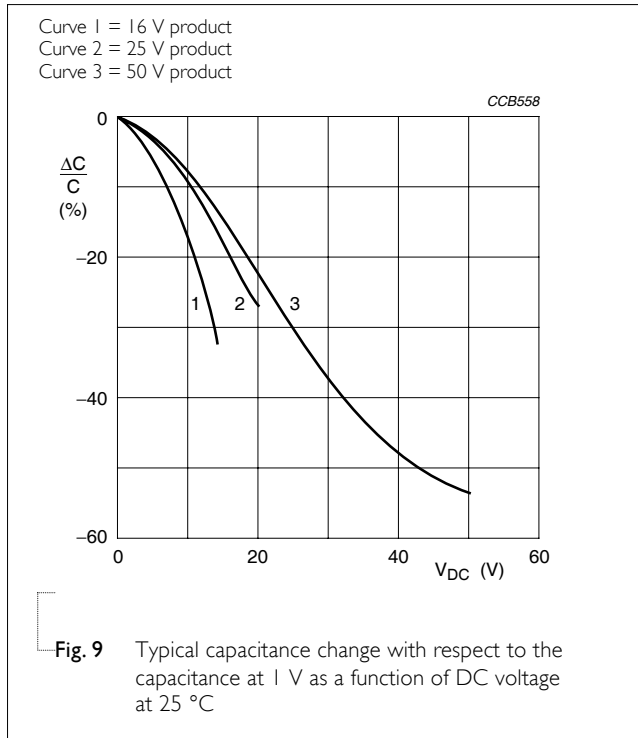

**Y5V 0612 25 V**

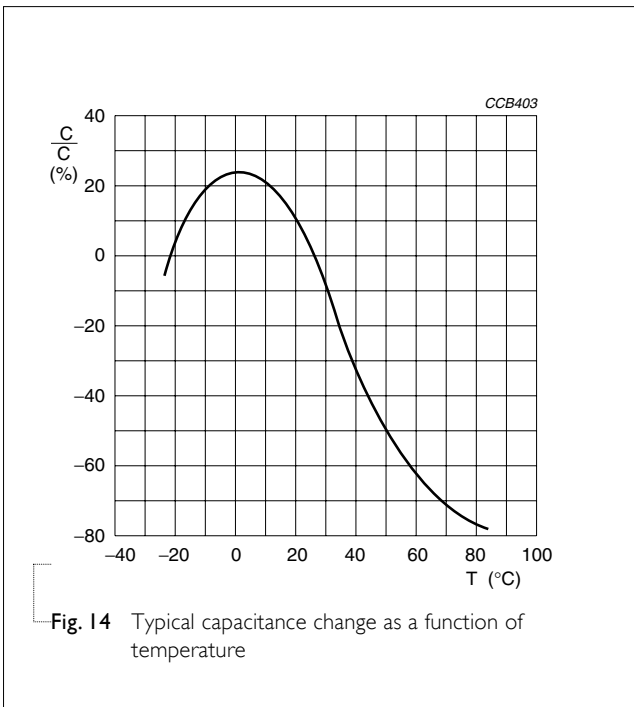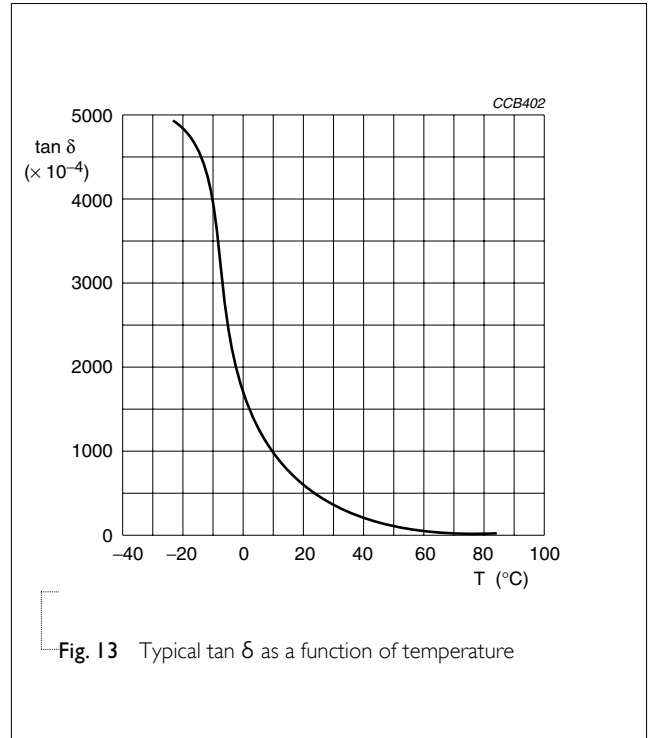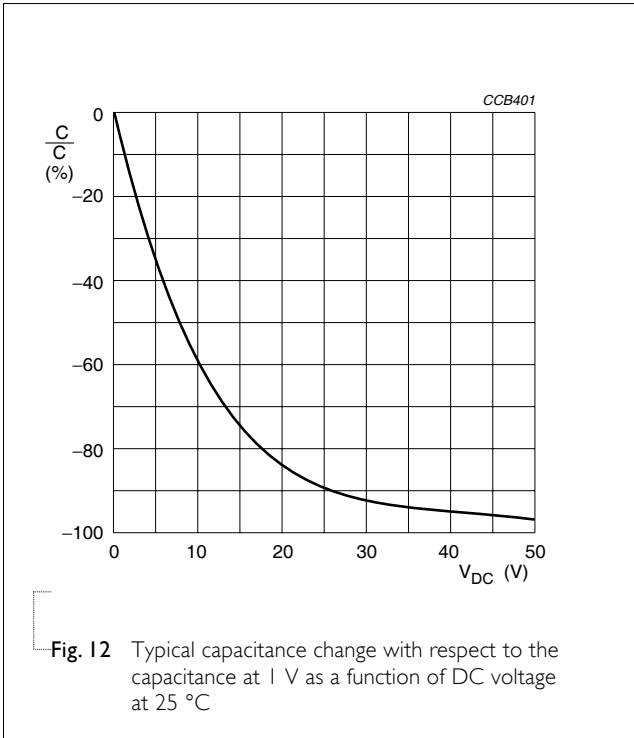

**TESTS AND REQUIREMENTS**
**Table 7** Test procedures and requirements

TEST	TEST METHOD	PROCEDURE	REQUIREMENTS
Mounting	IEC 60384-21/22	4.3 The capacitors may be mounted on printed-circuit boards or ceramic substrates	No visible damage
Visual inspection and dimension check		4.4 Any applicable method using $\times 10$ magnification	In accordance with specification
Capacitance		4.5.1 Class 1: $f = 1 \text{ MHz}$ for $C \leq 1 \text{ nF}$ , measuring at voltage $1 V_{\text{rms}}$ at $20 \text{ }^\circ\text{C}$ $f = 1 \text{ KHz}$ for $C > 1 \text{ nF}$ , measuring at voltage $1 V_{\text{rms}}$ at $20 \text{ }^\circ\text{C}$ Class 2: $f = 1 \text{ KHz}$ for $C \leq 10 \text{ } \mu\text{F}$ , measuring at voltage $1 V_{\text{rms}}$ at $20 \text{ }^\circ\text{C}$ $f = 120 \text{ Hz}$ for $C > 10 \text{ } \mu\text{F}$ , measuring at voltage $0.5 V_{\text{rms}}$ at $20 \text{ }^\circ\text{C}$	Within specified tolerance
Dissipation factor (D.F.)		4.5.2 Class 1: $f = 1 \text{ MHz}$ for $C \leq 1 \text{ nF}$ , measuring at voltage $1 V_{\text{rms}}$ at $20 \text{ }^\circ\text{C}$ $f = 1 \text{ KHz}$ for $C > 1 \text{ nF}$ , measuring at voltage $1 V_{\text{rms}}$ at $20 \text{ }^\circ\text{C}$ Class 2: $f = 1 \text{ KHz}$ for $C \leq 10 \text{ } \mu\text{F}$ , measuring at voltage $1 V_{\text{rms}}$ at $20 \text{ }^\circ\text{C}$ $f = 120 \text{ Hz}$ for $C > 10 \text{ } \mu\text{F}$ , measuring at voltage $0.5 V_{\text{rms}}$ at $20 \text{ }^\circ\text{C}$	In accordance with specification
Insulation resistance		4.5.3 At $U_r$ (DC) for 1 minute	In accordance with specification
Temperature coefficient		4.6 Class 1: Between minimum and maximum temperature NP0: $-55 \text{ }^\circ\text{C}$ to $+125 \text{ }^\circ\text{C}$ Normal Temperature: $20 \text{ }^\circ\text{C}$	<General purpose series> $\Delta C/C$ : Class 1: NP0: $\pm 30 \text{ ppm}/^\circ\text{C}$
Temperature characteristic		Class 2: Between minimum and maximum temperature X5R: $-55 \text{ }^\circ\text{C}$ to $+85 \text{ }^\circ\text{C}$ X7R: $-55 \text{ }^\circ\text{C}$ to $+125 \text{ }^\circ\text{C}$ Y5V: $-30 \text{ }^\circ\text{C}$ to $+85 \text{ }^\circ\text{C}$ Normal Temperature: $20 \text{ }^\circ\text{C}$	<General purpose series> Class 2: X5R/X7R: $\pm 15\%$ Y5V: $22\%$ to $-82\%$  <High Capacitance series> Class 2: X5R/X7R: $\pm 15\%$ Y5V: $22\%$ to $-82\%$
Adhesion		4.7 A force applied for 10 seconds to the line joining the terminations and in a plane parallel to the substrate	Force size $\geq 0603$ : 5N size = 0402: 2.5N size = 0201: 1N

TEST	TEST METHOD	PROCEDURE	REQUIREMENTS
Bond strength of plating on end face	IEC 60384-21/22	4.8 Mounting in accordance with IEC 60384-22 paragraph 4.3  Conditions: bending 1 mm at a rate of 1 mm/s, radius jig 340 mm	No visible damage  <General purpose series> $\Delta C/C$ Class 1: NP0: within $\pm 1\%$ or 0.5 pF, whichever is greater Class2: X5R/X7R/Y5V: $\pm 10\%$  <High Capacitance series> $\Delta C/C$ Class2: X5R/X7R/Y5V: $\pm 10\%$
		4.9 Precondition: 150 $\pm 10$ °C for 1 hour, then keep for 24 $\pm 1$ hours at room temperature Preheating: for size $\leq 1206$ : 120 °C to 150 °C for 1 minute Preheating: for size $> 1206$ : 100 °C to 120 °C for 1 minute and 170 °C to 200 °C for 1 minute Solder bath temperature: 260 $\pm 5$ °C Dipping time: 10 $\pm 0.5$ seconds Recovery time: 24 $\pm 2$ hours	Dissolution of the end face plating shall not exceed 25% of the length of the edge concerned  <General purpose series> $\Delta C/C$ Class 1: NP0: within $\pm 0.5\%$ or 0.5 pF, whichever is greater Class2: X5R/X7R: $\pm 10\%$ Y5V: $\pm 20\%$  <High Capacitance series> $\Delta C/C$ Class2: X5R/X7R: $\pm 10\%$ Y5V: $\pm 20\%$  D.F. within initial specified value $R_{ins}$ within initial specified value
Solderability	4.10	Preheated the temperature of 80 °C to 140 °C and maintained for 30 seconds to 60 seconds.  Test conditions for lead containing solder alloy Temperature: 235 $\pm 5$ °C Dipping time: 2 $\pm 0.2$ seconds Depth of immersion: 10 mm Alloy Composition: 60/40 Sn/Pb Number of immersions: 1  Test conditions for leadfree containing solder alloy Temperature: 245 $\pm 5$ °C Dipping time: 3 $\pm 0.3$ seconds Depth of immersion: 10 mm Alloy Composition: SAC305 Number of immersions: 1	The solder should cover over 95% of the critical area of each termination



TEST	TEST METHOD	PROCEDURE	REQUIREMENTS
Endurance	IEC 60384-21/22 4.14	1. Preconditioning, class 2 only: 150 +0/-10 °C /1 hour, then keep for 24 ±1 hour at room temp 2. Initial measure: Spec: refer initial spec C, D, IR 3. Endurance test: Temperature: NP0/X7R: 125 °C X5R/Y5V: 85 °C Specified stress voltage applied for 1,000 hours: Applied 2.0 × U <sub>r</sub> for general product. Applied 1.5 × U <sub>r</sub> for high cap. product. High voltage series follows with below stress condition: Applied 1.3 × U <sub>r</sub> for 500V series Applied 1.2 × U <sub>r</sub> for 1KV, 2KV, 3KV series 4. Recovery time: 24 ±2 hours 5. Final measure: C, D, IR  P.S. If the capacitance value is less than the minimum value permitted, then after the other measurements have been made the capacitor shall be precondition according to "IEC 60384 4.1" and then the requirement shall be met.	No visual damage  <General purpose series> ΔC/C Class 1: NP0: within ±2% or 1 pF, whichever is greater Class 2: X5R/X7R: ±15%; Y5V: ±30% D.F. Class 1: NP0: ≤ 2 × specified value Class 2: X5R/X7R: ≤ 16V: ≤ 7% ≥ 25V: ≤ 5% Y5V: ≤ 15% R <sub>ins</sub> Class 1: NP0: ≥ 4,000 MΩ or R <sub>ins</sub> × C <sub>r</sub> ≥ 40s whichever is less Class 2: X5R/X7R/Y5V: ≥ 1,000 MΩ or R <sub>ins</sub> × C <sub>r</sub> ≥ 50s whichever is less  <High Capacitance series> ΔC/C Class 2: X5R/X7R: ±20%; Y5V: ±30% D.F. Class 2: 2 × initial value max R <sub>ins</sub> Class 2: 1,000 MΩ or R <sub>ins</sub> × C <sub>r</sub> ≥ 50s, whichever is less
Voltage proof	IEC 60384-1 4.6	Specified stress voltage applied for 1 minute U <sub>r</sub> ≤ 100 V: series applied 2.5 U <sub>r</sub> 100 V < U <sub>r</sub> ≤ 200 V series applied (1.5 U <sub>r</sub> + 100) 200 V < U <sub>r</sub> ≤ 500 V series applied (1.3 U <sub>r</sub> + 100) U <sub>r</sub> > 500 V: 1.3 U <sub>r</sub> I: 7.5 mA	No breakdown or flashover



REVISION HISTORY

REVISION	DATE	CHANGE NOTIFICATION	DESCRIPTION
Version 1	Feb 05, 2010	-	- The statement of "Halogen Free" on the cover added
Version 0	Jun 22, 2009	-	<ul style="list-style-type: none"> <li>- New datasheet for 4C-Array series with RoHS compliant</li> <li>- Replace from pdf files: 0508_16V to 50V_1, 0612_16V to 50V_0, C-Array_NP0_50V_0508_7, C-Array_NP0_50V_0612_7, C-Array_X7R_16V_25V_50V_0612_6, C-Array_X7R_16V_0508_5, C-Array_Y5V_25V_0508_0, C-Array_Y5V_25V_0612_5</li> <li>- Define global part number</li> <li>- Description of "Halogen Free compliant" added</li> <li>- Test method and procedure updated</li> </ul>



## Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

### Наши контакты:

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331