


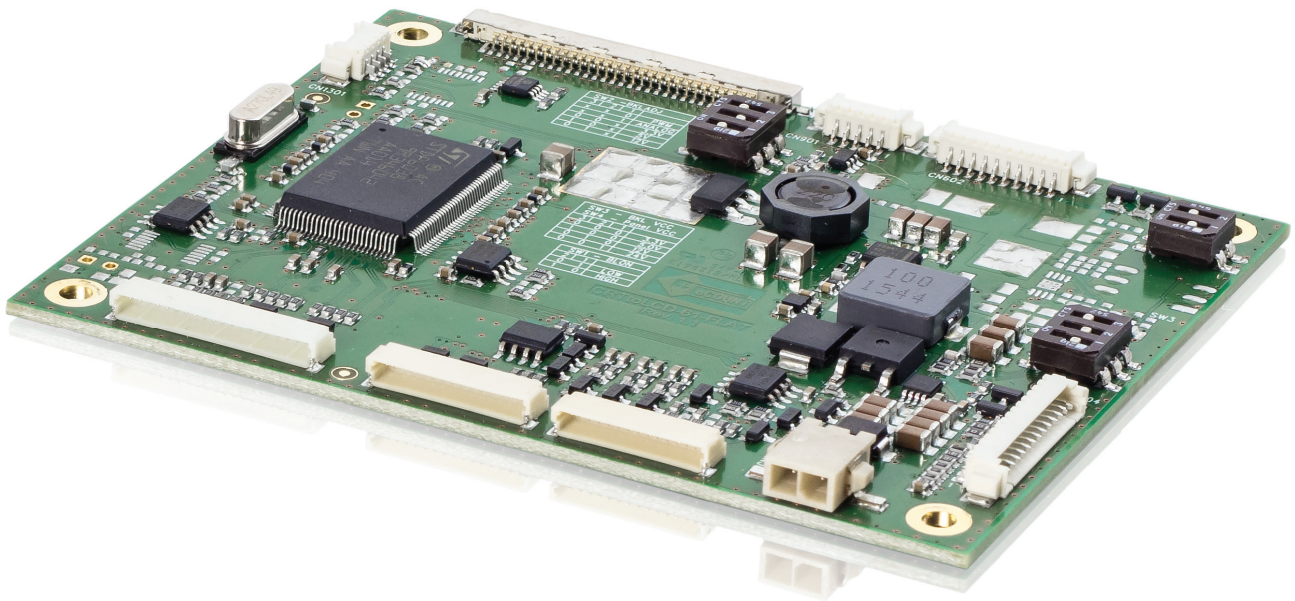


Low-Profile Full-HD-Flatpanel-Controller

CRTtoLCD-61-LP

- DVI, Analog-RGB and DisplayPort (DP) inputs up to WUXGA
- Display resolution up to WUXGA (1920x1200)
- Highest picture quality due to improved scaling algorithms
- Powerful software tools including Panel-Editor and Serial-API
- Scripting support
- Super low-profile (8mm)

Low-Profile Full-HD-Flatpanel-Controller

CRTtoLCD-61-LP

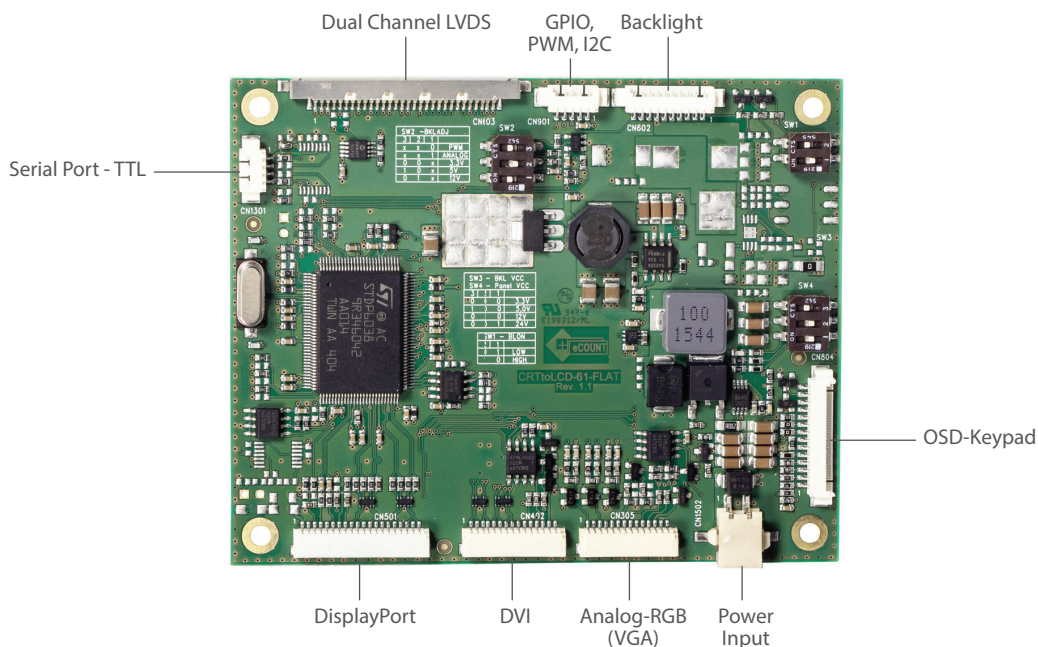

Description

The CRTtoLCD-61-LP is a highly integrated Full-HD-Flatpanel-Controller that allows connection of standard Analog RGB, DVI and DisplayPort sources to TFT-LCD flatpanels.

It includes all the necessary functionality to design a full featured LCD monitor.

From a single +12V DC power supply, the CRTtoLCD-61-LP generates all required supply voltages and power sequencing. LED or CCFL backlight dimming is supported and can be controlled by PWM or absolute voltage level.

Typical Verticals

Point of Sales (POS):

Check-in terminals

Point of Information (POI):

Public displays

Industrial Automation & Medical:

Panel-PCs, Industrial monitors

Test & Measurement:

Smart displays

Transportation:

Rugged displays

Gaming:

Casino slot machines, Lottery systems,
Open frame monitors

Low-Profile Full-HD-Flatpanel-Controller

CRTtoLCD-61-LP

Technical Information

DVI Input	Highest quality up to WUXGA@60Hz (with full zoom & shrink capabilities)
Analog Input	Analog-RGB up to WUXGA@60Hz, All color depths up to 24 bits
DisplayPort Input	Integrated DisplayPort 1.1 compliant receiver up to WUXGA
High Quality Advanced Scaling	Horizontal & Vertical Zoom
Specials	- Separate onboard power supplies for flatpanel (up to 3A) - High power connector for backlight (up to 3.5A) - Ambient Light Sensor support to control backlight brightness via ADC input - PWM or voltage controlled backlight dimming support - GPIO's also configurable as I²C or PWM output - Scripting support - DDC2Bi / VCP (also accessible via script) - Serial-API for full access to various functions and features - Serial-OSD for keypad-less OSD control
Integrated On-Screen-Display	On Screen Display (OSD) for control of all configured features
Display-Interface	JILI30 (up to 2x24Bit dual channel LVDS) Output up to WUXGA@60Hz (1920x1200)
Form Factor	100.00 mm x 80.00 mm x 8.0 mm (L/W/H) - No components on PCB bottom side
Optional	Inverter and display cable-kits for various flatpanels

Ordering Information

Article	Part.-No.	Description
CRTtoLCD-61-LP	21088E	Low Profile Full-HD-Flatpanel-Controller with Analog-RGB(VGA), DVI and DisplayPort inputs and Dual channel LVDS output, Height: 8 mm
OSD-Panel-Set-LP	22011E	5-button keypad with dual color LED(red/green) IR-Receiver, Ambient Light Sensor (ALS) incl. cable
KAB-COMtoTTL	61021E	Serial-RS232 to TTL converter cable for CRTtoLCD-51-pro/-61-pro/-71-LP/-61-LP
ADAPT-61-LP	61030E	Input header adapter with Analog-RGB (VGA), DVI, DP inputs for CRTtoLCD-61-LP (Part-No.: 21088E)
KAB-ADAPT-61-LP	61030L	Cableset for ADAPT-61-LP (P/N : 22012E)
KAB-ADAPT-P-LP	61030P	Power input cable for KAB-ADAPT-X1-LP (P/N : 22012E & 22014E)



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331