

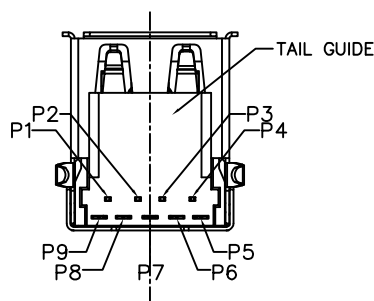
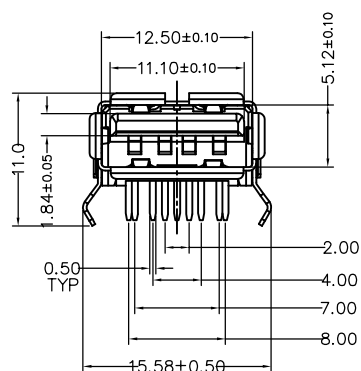

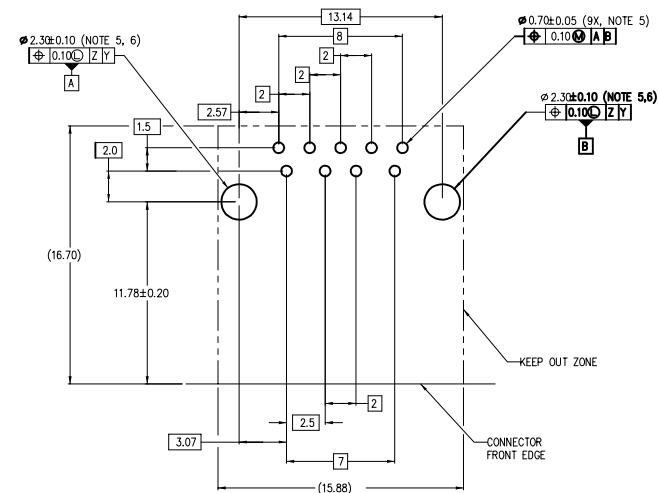


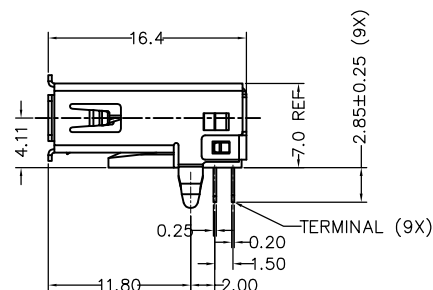

PART NUMBER CODE:
10117835-X0XLF

—PLATING OPTION ON CONTACT AREA
1: 30u" (0.76um) Min. gold (Durability: 3500)
2: Gold Flash (Durability: 1500)
3: 15u" (0.38um) Min. gold (Durability: 3000)
—PACKAGE TYPE
0: TRAY
T: TAPE & REEL

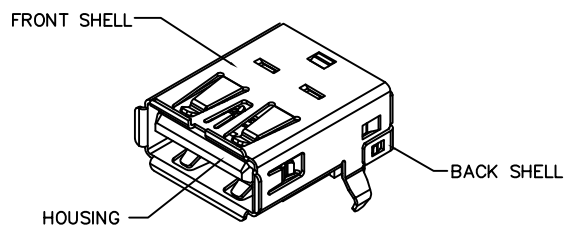

RECOMMENDED PCB LAYOUT
TOP VIEW (THICKNESS: 1.6±0.1mm)

Notes:

- ## 1) Materials and Finish

Housing & Tail Guide: Glass fiber filled thermoplastic resin, UL94 V-0 rated, color blue.

Terminals: Copper Alloy, 50u"(1.27um) Min. Ni underplated over all.

Contact area: see table

Tail area: 80u"(2.0um) Min. Matte Tin plated.

Front Shell: Copper Alloy, 50u"(1.27um) Min. Ni plated over all.

Back Shell: Steel, 80u"(2.0um) Min. Ni plated over all.

- 2) Product specification refer to FCI GS-12-0928.
- 3) Package specification refer to GS-14-2157 .
- 4) Housing will withstand exposure to 260°C peak temperature for 10 seconds in a convection reflow oven
- 5) Product meets European Union Directives and other country regulations as described in FCI GS-22-008.
- 6) Recommended PCB hole is finished plating through hole (PTH) size.
- 7) Datum Z,Y and basic dimensions were constructed by customer.

mat'l. code				surface ASME Y14.5 ✓		tolerance ASME Y14.5		projection 		product family USB 3.0																	
litr		ecrn no		dr		date		tolerances unless otherwise specified										title									
A		—		BF		01/04/2012				angles		vertical		X.±0.30		USB 3.0 Standard—A Receptacle Right Angle Type Soldering to Board Termination											
B		ELX-N-01222		A.ZH		07/16/2012								X.X±0.25													
C		ELX-N-17163		L.Q		03/10/2014		X'±1"				X.XX±0.20		scale													
D		ELX-N-17795		L.Q		05/27/2014		dr		BEER FU		2012-01-04		dwg no										sheet 1 of 1		size	
E		ELX-N-19547		L.Q		11/21/2014		engr		BEER FU		2012-01-04		10117835										A4			
F		ELX-N-21815		L.Q		09/01/2015		chr		BEER FU		2012-01-04															
								appd		BEER FU		2012-01-04															
sheet index		revision sheet		F		1												type		CUSTOMER Drawing							



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331