

Water Resistance Checker (basic) Model GSK-944

This checker utilizes resistance to measure dissolved solids in water. The more resistance, the less conductive the water; as resistance levels lessens the materials that conduct electricity are elevated. Results are displayed by a series of (8) LED's.

Technical Specifications

- Power source: 9 VDC
- LED resistance level indicators: 7
- LED on/off indicator: 1
- Level adjustment: 3 levels
- PCB dimensions: 2.78 x 1.79 in.

Operating Principles

The more resistance in water the less dissolved solids, such as minerals, are present. Conversely, as resistance decreases the level of conductive material in the water increases. A series of (green, yellow, and red) LED's indicate the level of resistance (Green – higher through Red – lowest) the more LED's lit the less resistance. There are 3 switchable levels (see Figure 1 resistance table).

Circuit Assembly

Please refer to Figures 1, 2, and 3 for aid in component placement. It is recommended to start with lower components i.e. diodes, resistors, electrolyte capacitors, and transistors. Be careful to check polarity before soldering. If a problem is detected it is best too use a desoldering pump or desoldering braids to remove component. This will minimize potential damage to the printed circuit board.


Testing

Connect the battery to provide power to the circuit. The LED power light will come on. Slide switch "SW" to position "1." Insert probe into water source, LED 1 through LED 8 will display level of resistance in water source.

Troubleshooting

The main cause of problems will come from misplaced components or faulty soldering. Utilize Figures 1, 2 and 3 to ensure proper placement, polarity and then check solder points for connectivity.

Figure 1 Water Checker Circuit

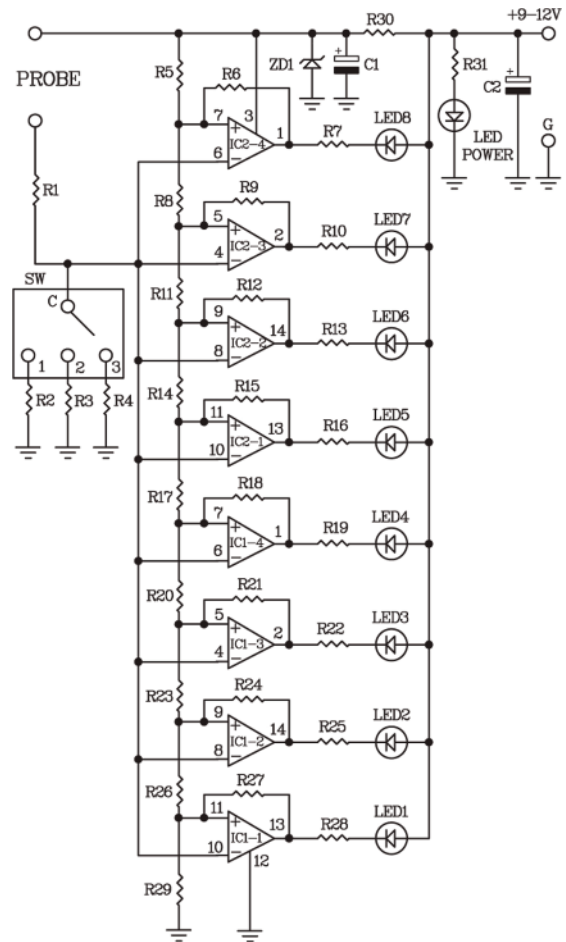

Accessories

Use GSB-03 (sold separately) to house the PCB and batteries.

Figure 2 Connecting Circuits


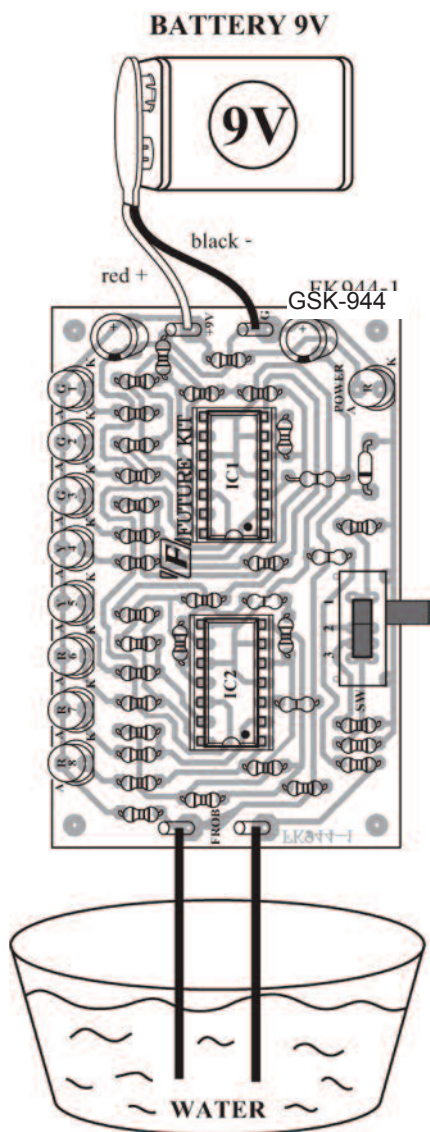


Figure 3 Installing components

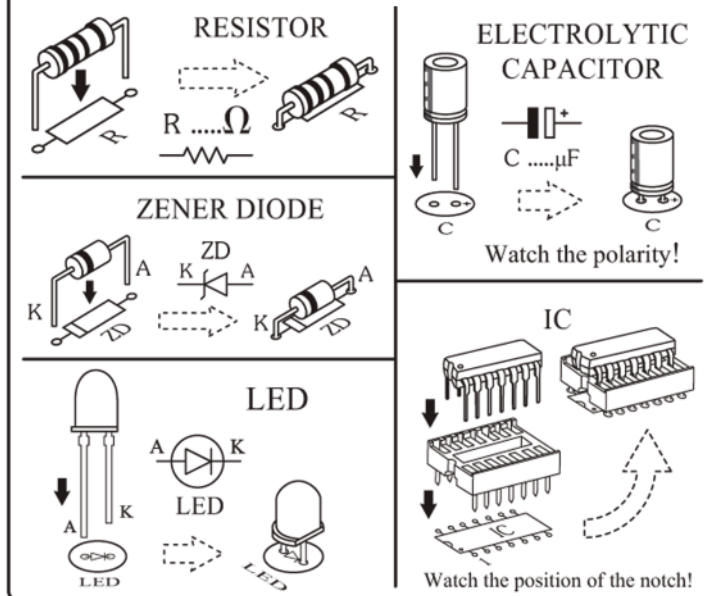

Resistors

R1, 30	1 kΩ	brown – black – red – gold
R2, R8, R11, R14, R17, R20, R23, R26	10 kΩ	brown – black – orange – gold
R3	100 kΩ	brown – black – orange – gold
R4, R6, R9, R12, R15, R18, R21, R24, R27	1 MΩ	brown – black – green – gold
R5, R28	20 kΩ	red – black – orange – gold
R7, R19, R13, R16, R19, R22, R25, R28	5 kΩ	green – black – red – gold
R31	3 kΩ	orange – black – red – gold

Electrolytic Capacitors

C1, C2	33 μF
--------	-------

Diode

ZD1	5.1 V
-----	-------

Integrated Circuits

IC1, IC2	LM339
----------	-------

Switch

Position 1

LED	Water Resistance
8	0.98 kΩ
7	2.48 kΩ
6	4.41 kΩ
5	6.97 kΩ
4	10.57 kΩ
3	15.96 kΩ

Position 2

LED	Water Resistance
8	18.83 kΩ
7	33.80 kΩ
6	53.06 kΩ
5	78.74 kΩ
4	114.61 kΩ
3	168.61 kΩ
2	258.48 kΩ
1	438.22 kΩ

Position 3

LED	Water Resistance
8	197.26 kΩ
7	347.04 kΩ
6	539.62 kΩ
5	796.39 kΩ
4	1,155.86 kΩ
3	1,695.08 kΩ
2	2,593.77 kΩ
1	4,391.16 kΩ



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331