



MULTILAYER CERAMIC DIPPED AXIAL AND RADIAL CAPACITORS for Automotive Applications



Capacitors - AEC-Q200 Approved

Multilayer Ceramic Dipped Axial and Radial Capacitors for Automotive Applications



TABLE OF CONTENTS

Applications.....	2
General Information	3
Ordering Information	4
Electrical Data and Dielectric Characteristics	5
Dimensions Data	6
Marking.....	7
• Mono-Axial Marking Code Description	7
• Mono-Kap	8
Packaging.....	9
• Mono-Axial	9
• Mono-Kap	11
Product Range	13
• Mono-Axial C0G Dielectric.....	13
• Mono-Axial X7R Dielectric	14
• Mono-Axial X8R Dielectric	16
• Mono-Kap C0G Dielectric.....	17
• Mono-Kap X7R Dielectric.....	18
• Mono-Axial X8R Dielectric	20

One of the World's Largest Manufacturers of
Discrete Semiconductors and Passive Components





MULTILAYER CERAMIC DIPPED AXIAL AND RADIAL CAPACITORS for Automotive Applications



Applications



Capacitors - AEC-Q200 Approved

Powertrain

- Engine Control Unit
- Common Rail Diesel Electrical Control
- Turbo Charger Control Unit
- Piezoelectric-Injection Driver
- Engine Sensors
- Electrical Fan Control
- Electrical Water Pump
- Ignition Electrical Drive
- Board Load-Control Unit
- Integrated Starter Generator
- Boardnet Management

Lighting Systems

- Headlight Leveling Control and Advanced Front Lighting Cleaning System
- Sensors for Night Vision Systems and Fog Detection
- LED Lighting
- Ambient Lighting
- HID Electrical

Chassis

- Active Safety
- Sensors
- EAGA, Electrical Catalytic Converter, Diesel Particle Filter
- Electrical Transmission
- Electric Park Brake
- Active Suspension
- Electrical Power Steering
- Electrical Hydraulic Power Steering
- Tire Pressure Monitoring

Body and Comfort

- Sensors
- Climate Control
- Seat Adjust and Memory
- Immobilizer and Security Systems
- Dashboard and Interior Illumination
- HVAC—Heating, Ventilating, Air Conditioning
- Multimedia Systems
- Passive Safety
- Reversible Wiper Drives
- Keyless or Passive Entry
- Door / Window / Sunroof Control

Driver Information

- Driver Information System
- GPS Car Navigation and Audio System
- SDARS / Antenna / Amplifier System
- Bluetooth Communication
- Lidar Sensor



MULTILAYER CERAMIC DIPPED AXIAL AND RADIAL CAPACITORS

for Automotive Applications





Capacitors - AEC-Q200 Approved

General Information

For more than 20 years, Vishay Vitramon has supported the automotive industry with robust, highly reliable MLCCs that have made it a leader in this segment. All Vishay Vitramon MLCCs are manufactured in precious metal technology (PMT/NME) with a wet build process. They are qualified according to AEC-Q200 with PPAP available on request.

These chips are used in the automotive-grade Mono-Axial and Mono-Kap series from Vishay BCcomponents. They feature coppery steel wire lead terminations with a 100 % tin plate matte finish. Their epoxy coating provides mechanical strength for assembly extended-life environmental protection.

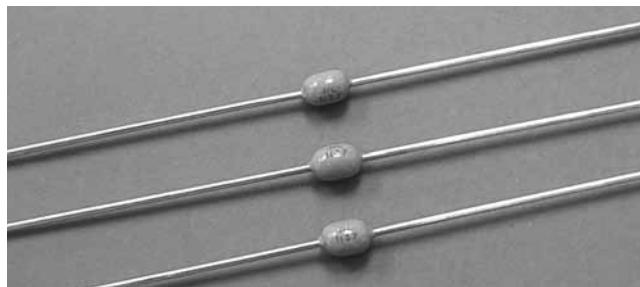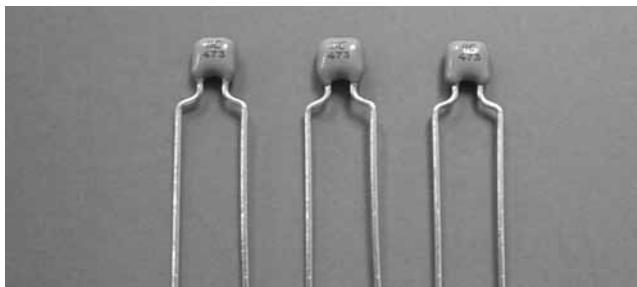RoHS
COMPLIANT

General Specifications

C0G (NP0) Dielectric	X7R, X8R Dielectric
Note: Electrical characteristics at + 25 °C unless otherwise specified	Note: Electrical characteristics at +25 °C unless otherwise specified
Operating Temperature: – 55 °C to + 160 °C (above +150 °C, 50 % rated voltage)	Operating Temperature: – 55 °C to + 160 °C (above +150 °C, 50 % rated voltage)
Capacitance Range: 100 pF to 10 nF	Capacitance Range: 470 pF to 1.0 µF
Temperature Coefficient of Capacitance (TCC): ± 30 ppm/°C from – 55 °C to + 125 °C	Temperature Coefficient of Capacitance (TCC): X7R: ± 15 % from – 55 °C to + 125 °C, with 0 Vdc applied + 15 %/– 30 % from – 55 °C to + 150 °C, with 0 Vdc applied X8R: ± 15 % from – 55 °C to + 150 °C, with 0 Vdc applied
Dissipation Factor (DF): 0.1 % maximum at 1.0 Vrms and 1 kHz for values > 1000 pF and 1 MHz for values ≤ 1000 pF	Dissipation Factor (DF): 2.5 % maximum at 1.0 Vrms and 1 kHz
Voltage Range: 50 Vdc, 100 Vdc, and 200 Vdc	Voltage Range: 50 Vdc, 100 Vdc, and 200 Vdc
Insulating Resistance: At + 25 °C 100 000 MΩ min. or 1000 QF whichever is less At + 125 °C 10 000 MΩ min. or 100 QF whichever is less Test condition: rated voltage within 2 minutes of charging	Insulating Resistance: At + 25 °C 100 000 MΩ min. or 1000 QF whichever is less At + 125 °C 10 000 MΩ min. or 100 QF whichever is less
Aging: 0 % maximum per decade	Aging Rate: Typical 1 % maximum per decade
Dielectric Withstanding Voltage (DWV): This is the maximum voltage the capacitors are tested for a 1-s to 5-s period and the charge/discharge current does not exceed 50 mA DWV: 50 V to 100 V, at 250 % of rated voltage 200 V, at 200 % of rated voltage	Dielectric Withstanding Voltage (DWV): This is the maximum voltage the capacitors are tested for a 1-s to 5-s period and the charge/discharge current does not exceed 50 mA DWV: 50 V to 100 V, at 250 % of rated voltage 200 V, at 200 % of rated voltage



MULTILAYER CERAMIC DIPPED AXIAL AND RADIAL CAPACITORS

for Automotive Applications



Ordering Information

Mono-Axial

A	103	K	15	X7R	F	5	TAA	V
Product Type	Capacitance Code	Cap. Tolerance	Size Code	Temp. Char.	Rated Voltage	Lead Dia.	Packaging	Automotive Application
A = Mono-Axial	J = ± 5 % K = ± 10 % M = ± 20 %	Ref. mechanical spec.	C0G X7R X8R	F = 50 V H = 100 V K = 200 V	5 = 0.5 mm (0.20")	TAA = T&R UAA = AMMO	AEC Q200 Qualified for Automotive Grade Product	
Two significant digits followed by the number of zeros.								
Example: 103 = 10 000 pF								

Ordering Example: A-103-K-15-X7R-F-5-TAA-V

Mono-Kap

K	102	K	15	X7R	F	5	3	H	5	V
Product Type	Capacitance Code	Cap. Tolerance	Size Code	Temp. Char.	Rated Voltage	Lead Dia.	Packaging	Lead Style	Lead Spacing	Automotive Application
A = Mono-Kap	J = ± 5 % K = ± 10 % M = ± 20 %	Ref. mechanical spec.	C0G X7R X8R	F = 50 V H = 100 V K = 200 V	5 = 0.5 mm (0.20")	L = Straight lead H = Hight seated assy	3 = BULK, with lead length of 30 ± 5.0 mm (1.25") T = Tape and reel U = AMMO	2 = 2.5 mm (0.1") 5 = 5.0 mm (0.2")	AEC Q200 Qualified for Automotive Grade Product	
Two significant digits followed by the number of zeros.										
Example: 102 = 1000 pF										

Ordering Example: K-473-K-15-X7R-F-5-3-H-5-V

Capacitors - AEC-Q200 Approved






MULTILAYER CERAMIC DIPPED AXIAL AND RADIAL CAPACITORS







for Automotive Applications



Electrical Data and Dielectric Characteristics

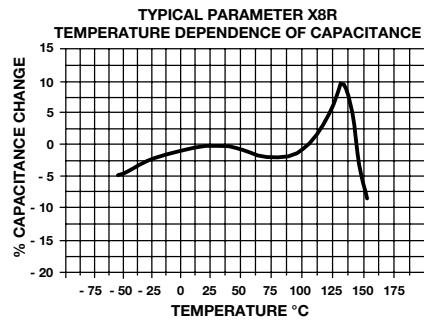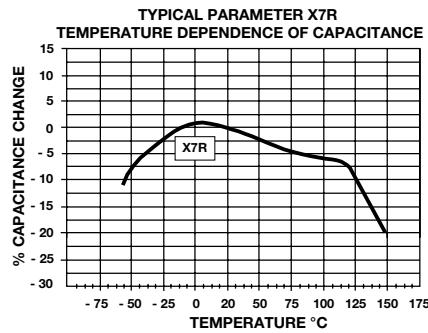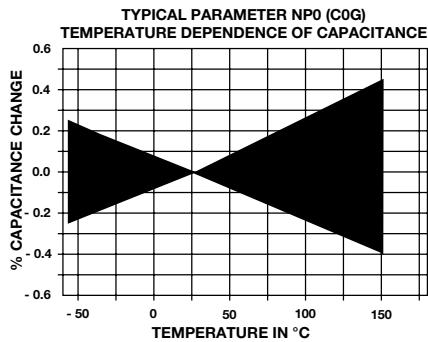

Remark: NP0 and X7R are defined temperature up to + 125 °C

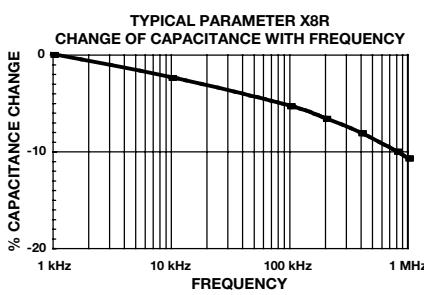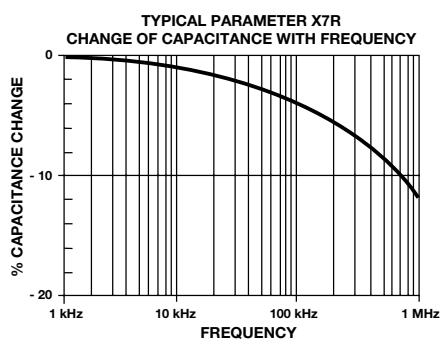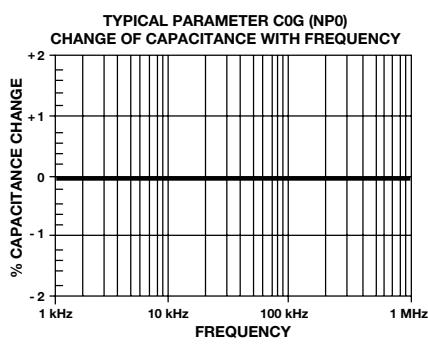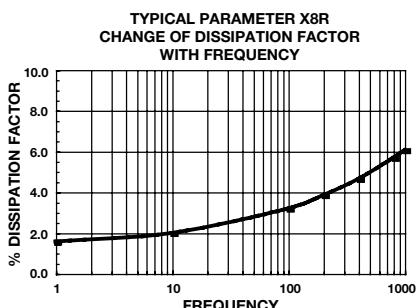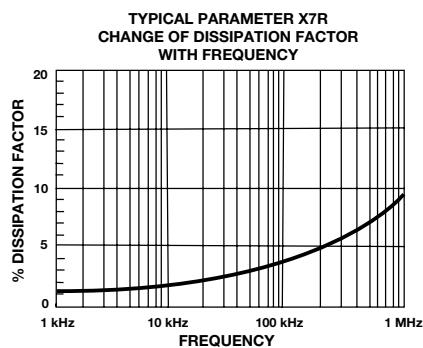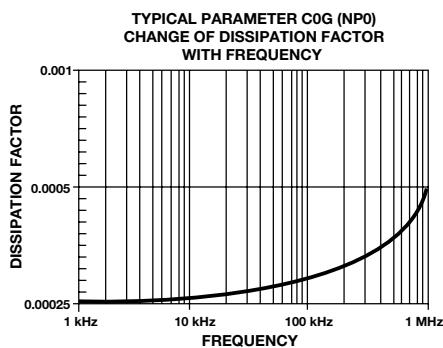

Capacitors - AEC-Q200 Approved



MULTILAYER CERAMIC DIPPED AXIAL AND RADIAL CAPACITORS


for Automotive Applications



Capacitors - AEC-Q200 Approved

Dimensions Data

Mono-Axial

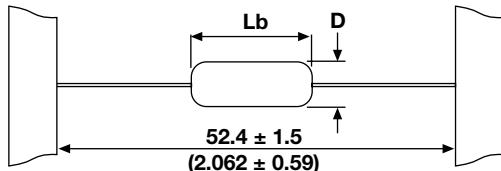


Capacitor Dimensions and Weight

Size Code	L _b _{max} ⁽¹⁾	ØD _{max} ⁽¹⁾	Lead diameter (mm)	Weight (g)
15	0.15 (3.8)	0.10 (2.5)	0.5 ± 0.05	≈ 0.14
20	0.20 (5.0)	0.12 (3.0)	0.5 ± 0.05	≈ 0.15


Note: 1. Dimensions between parentheses are in millimeters.
2. If inserted with 1210 chip, then Ød_{max} is 4.5 mm (0.18").

Mono-Kap

L2
Component outline for
Lead spacing 2.5 ± 0.8 mm
(straight leads)

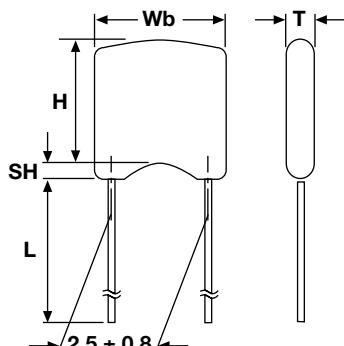


H5
Component outline for
Lead spacing 5.0 ± 0.8 mm
(flat bent leads)

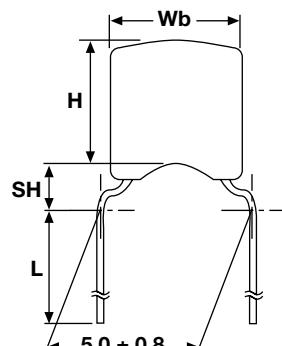


L2 and H5 are preferred styles

K2
Component outline for
Lead spacing 2.5 ± 0.8 mm
(outside kink)

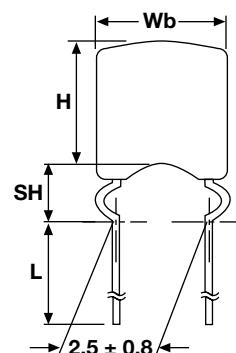

K5
Component outline for
Lead spacing 2.5 ± 0.8 mm
(outside kink)

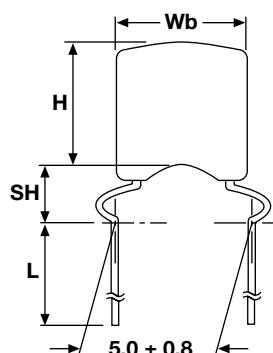

SIZE CODE	Wb	H	T	Lead Diameter	CAPACITOR DIMENSIONS (Unit: mm)			
					MAX. SEATING HEIGHT (SH)			
					L2	H5	K2	K5
15	3.0-3.8	2.0-3.8	1.6-2.6	0.5±0.05	1.6	2.6	3.5	3.5
20	4.3-5.1	2.5-5.1	1.9-3.2	0.5±0.05	1.6	2.6	3.5	3.5



MULTILAYER CERAMIC DIPPED AXIAL AND RADIAL CAPACITORS

for Automotive Applications




Marking

Mono-Axial Marking Code Description


DDD	XXX	t	V	T
Date Code	Capacitance Code	Tolerance Code	Voltage Code	T.C. Code
The first digit is the year, the last two digits are the week Examples: 309 = 2003, 9th week 317 = 2003, 17th week	Two significant digits followed by one digit for the multiplier as given below. 0=x 1 2=x 100 4=x 10 000 1=x 10 3=x 1000 5=x 100 000	J = ± 5 % K = ± 10 % M = ± 20 %	1 = 100 V 2 = 200 V 5 = 50 V	A = C0G(NP0) C = X7R R = X8R

Capacitors - AEC-Q200 Approved

Capacitance Value < 100 pF

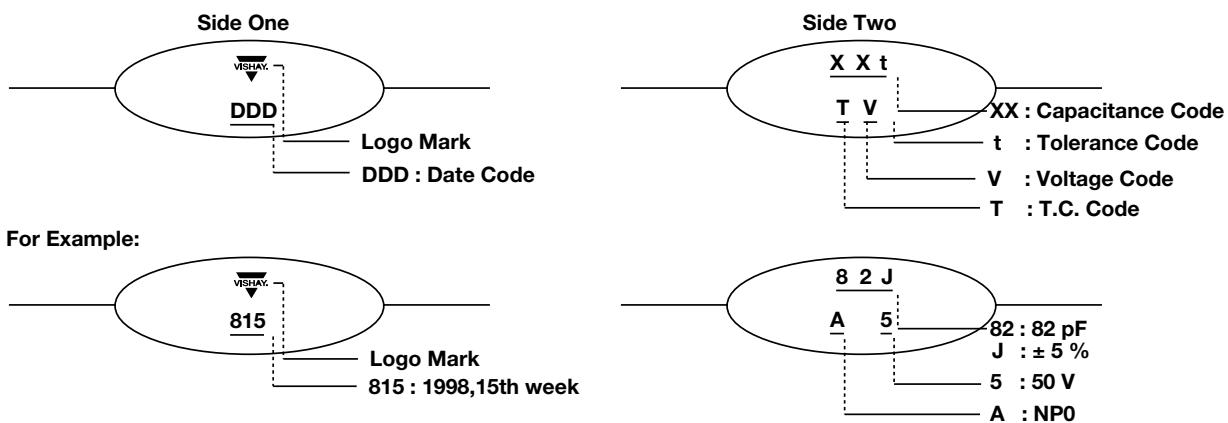

Capacitance Value ≥ 100 pF

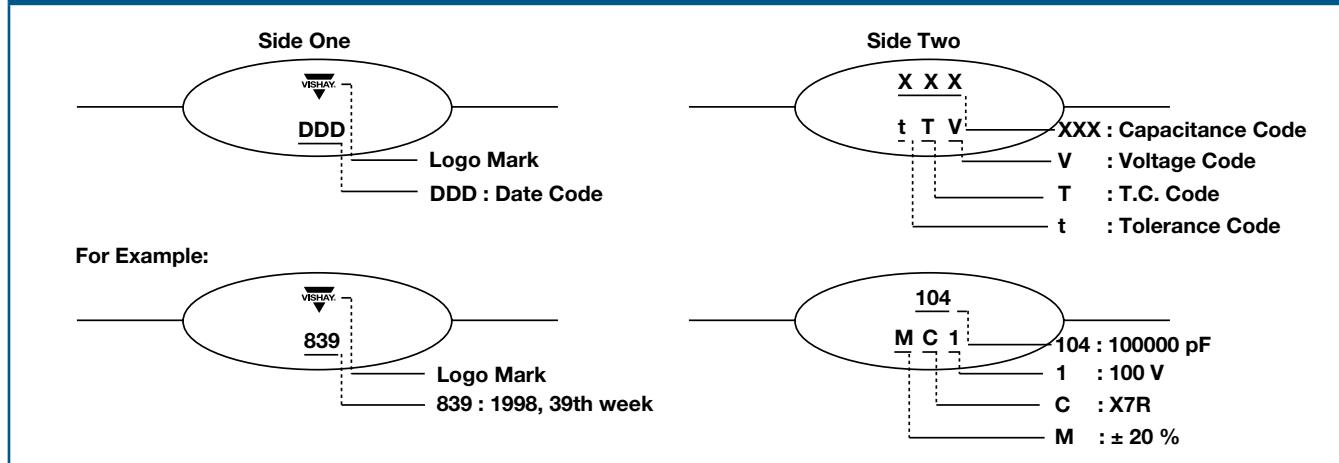

Note: VISHAY or BCcomponents logo can be marked on the products body.



MULTILAYER CERAMIC DIPPED AXIAL AND RADIAL CAPACITORS

for Automotive Applications




Capacitors - AEC-Q200 Approved


Marking

Mono-Kap


Size 15 Capacitance Value < 100 pF

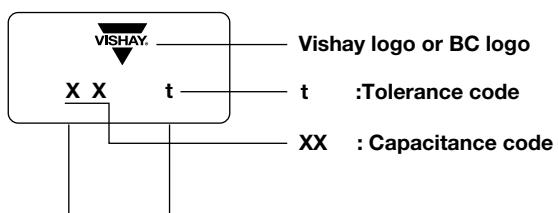


For example

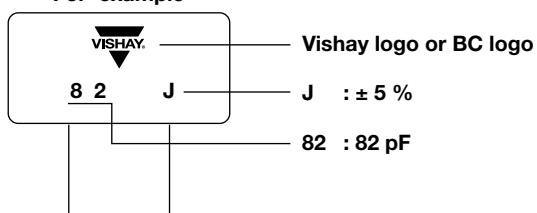


Size 15 Capacitance Value \geq 100 pF

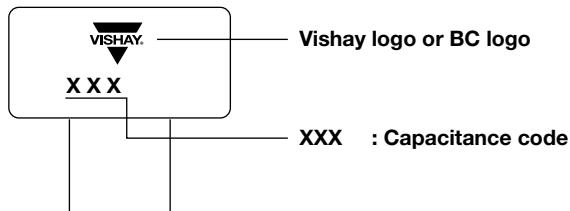


For example

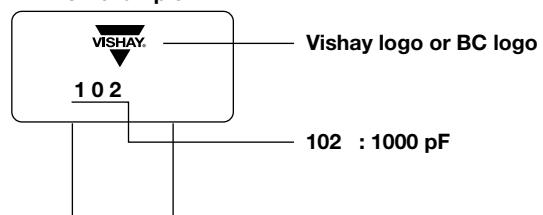

Size 20 Capacitance Value \geq 100 pF

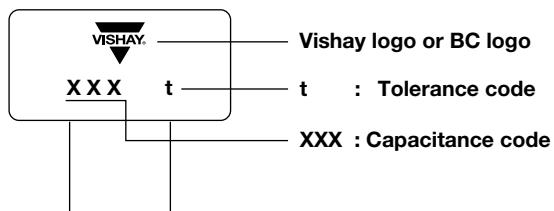

For example

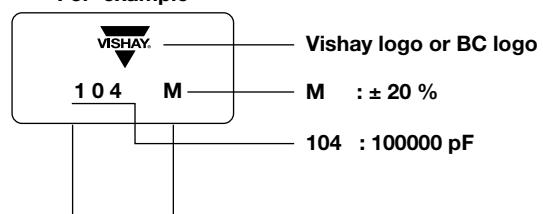



MULTILAYER CERAMIC DIPPED AXIAL AND RADIAL CAPACITORS

for Automotive Applications



Capacitors - AEC-Q200 Approved

Packaging

Mono-Axial

Reel Data

- A maximum of 0.5 % of the total number of capacitors per reel may be missing.
- A maximum of 1 consecutive vacant positions is followed by 6 consecutive components.
- Tape begins and ends with a minimum of 4 empty positions (50 mm tape).
- Maximum of 5 splicers per reel.


Ammopack Data

- A maximum of 0.5 % of the total number of capacitors per reel may be missing.
- A maximum of 1 consecutive vacant positions is followed by 6 consecutive components.
- Tape begins and ends with a minimum of 4 empty positions (180 mm tape).
- Maximum of 5 splicers per reel.
- The cumulative pitch tolerance over 20 consecutive units is not to exceed ± 1.0 mm.
- Lead space (F) shall be measured at (3.6 ± 0.5) mm from the capacitor seating plane.


Labelling

- Each reel is provided with a label showing the following details:
- Manufacturer, A style, capacitance, tolerance, batch number, quantity of components, rated voltage, dielectric.
- On special request other designations can be shown.
- See example.

Reel and Reel Dimensions

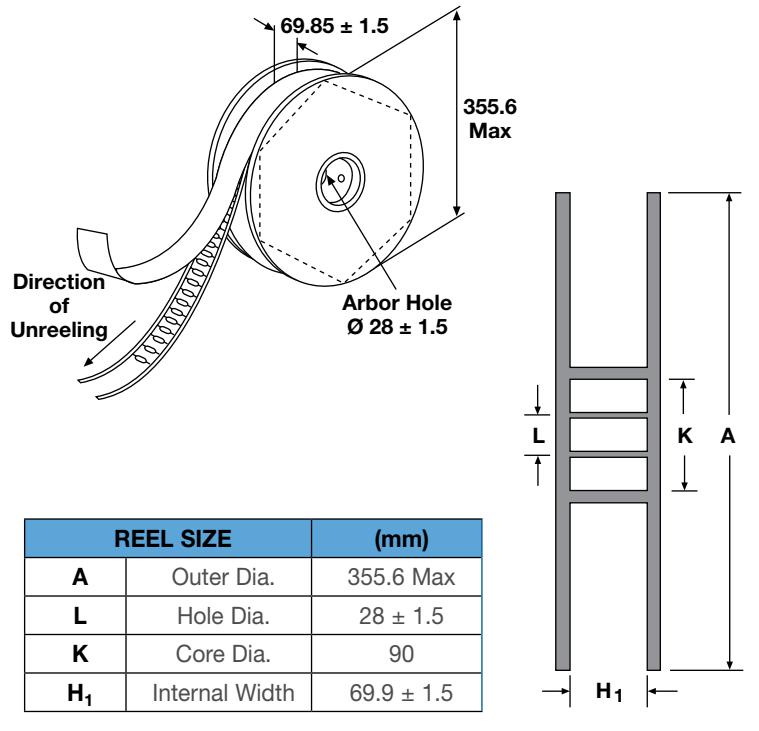

Ammopack

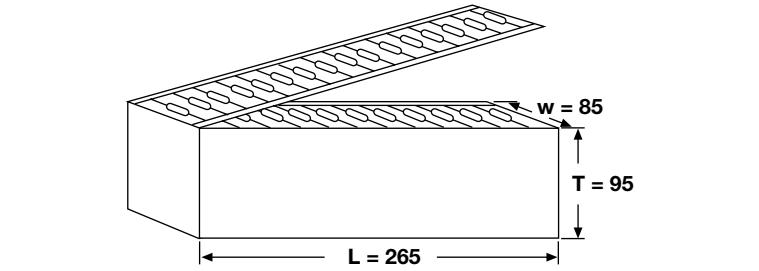

Labelling Example



>>

MULTILAYER CERAMIC DIPPED AXIAL AND RADIAL CAPACITORS
for Automotive Applications



Capacitors - AEC-Q200 Approved


Packaging

Mono-Axial (continued)

Packaging Quantities and Box Dimensions

Packaging	Size Code	Smallest Packaging Quantity (SPQ)	Box Dimensions L x W x H (mm)
Tape on reel	15; 20	7000	370 x 370 x 90
Ammopack	15; 20	4000	265 x 85 x 95

Capacitors on Bandolier

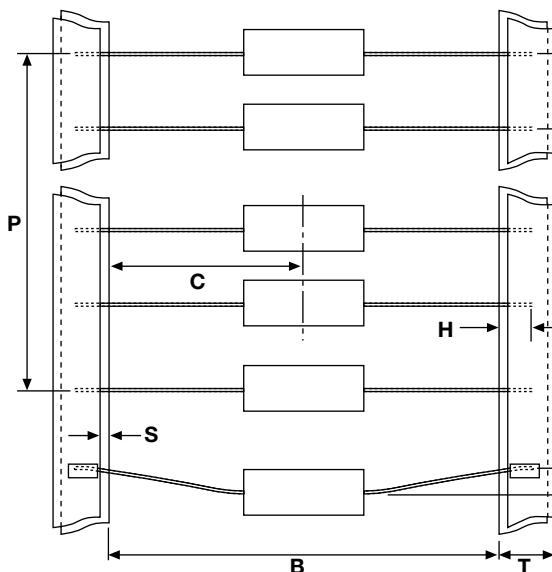

Symbol	Parameter	Dimensions	
		mm	inch
B ⁽¹⁾	Inside tape spacing	52.4 ± 1.5	2.062 ± 0.059
C	Centre to tape spacing	± 0.8	± 0.031
P	Cumulative pitch, 6 consecutive components	± 1.5	± 0.059
A	Components pitch	5 ± 0.5	0.197 ± 0.015
M	Lead bend	< 1.2	< 0.047
S	Exposed adhesive	< 0.51	> 0.020
T	Tape width	6.35	0.25
H	Lead sandwich	> 3.96	> 0.156

Note:

1. Inside tape spacing 26.0 + 1.51/- 0.0 is available on request



MULTILAYER CERAMIC DIPPED AXIAL AND RADIAL CAPACITORS

for Automotive Applications



Capacitors - AEC-Q200 Approved

Packaging

Mono-Kap


Reel Data

- A maximum of 0.5 % of the total number of capacitors per reel may be missing.
- A maximum of 1 consecutive vacant positions is followed by 6 consecutive components.
- Tape begins and ends with a minimum of 4 empty positions (50 mm tape).
- Maximum of 5 splicers per reel.


Ammopack Data

- A maximum of 0.5 % of the total number of capacitors per reel may be missing.
- A maximum of 1 consecutive vacant positions is followed by 6 consecutive components.
- Tape begins and ends with a minimum of 4 empty positions (50 mm tape).
- Maximum of 5 splicers per reel.
- The cumulative pitch tolerance over 20 consecutive units is not to exceed ± 1.0 mm.
- Lead space (F) shall be measured at (3.6 ± 0.5) mm from the capacitor seating plane.


Reel and Reel Dimensions

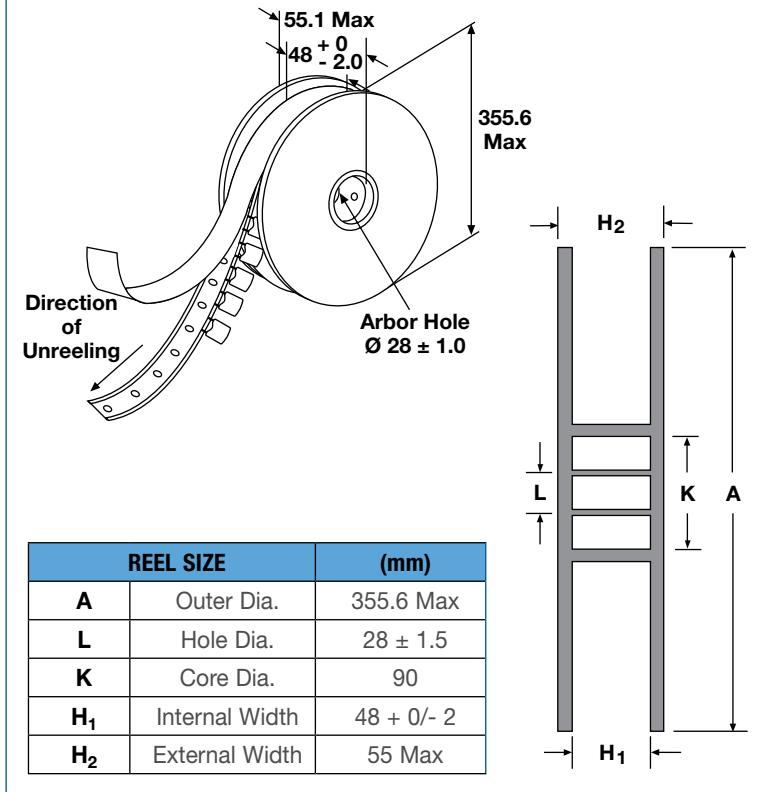

Ammopack

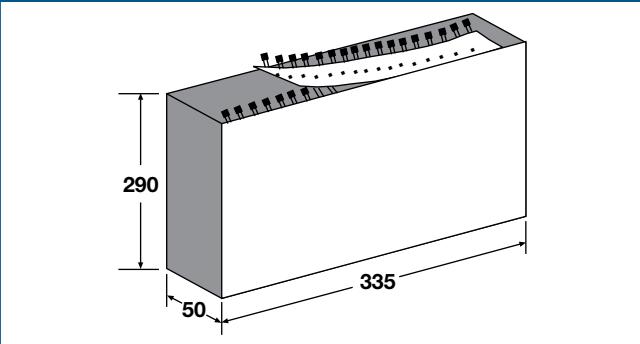

Labelling Example

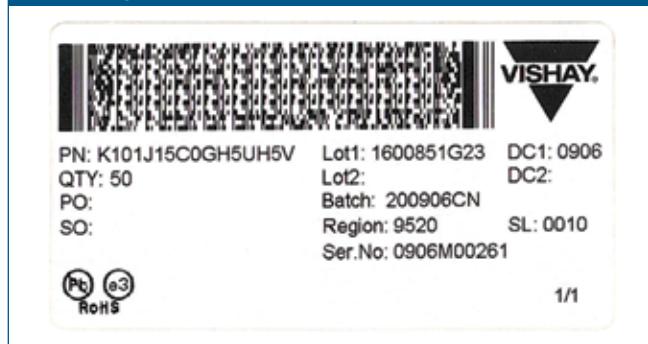

Packaging Quantities and Box Dimensions

Packaging	Size Code	Smallest Packaging Quantity (SPQ)	Box Dimensions L x W x H (mm)
Tape on reel	15	4000	370 x 370 x 60
	20	3000	
Ammopack	15; 20	2500	335 x 290 x 50
Bulk (Note 1)	15; 20	5000	245 x 120 x 65

Note:

- SPQ contains one or a multiple of poly-bags, 1000 units per bag.

>>



MULTILAYER CERAMIC DIPPED AXIAL AND RADIAL CAPACITORS

for Automotive Applications




Capacitors - AEC-Q200 Approved

Packaging

Mono-Kap (continued)

Capacitors on Tape

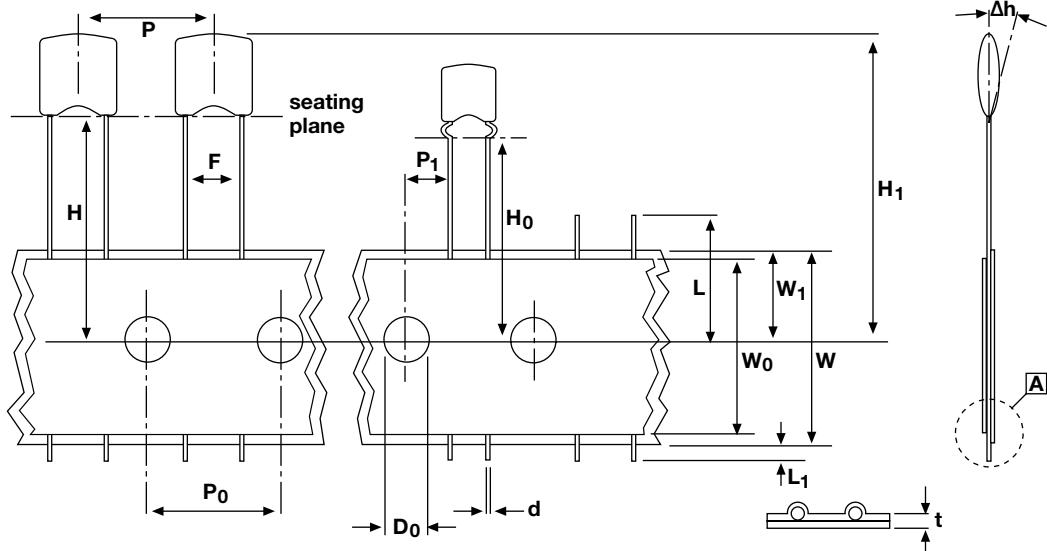

Symbol	Parameter	Dimensions	
		mm	inch
L	Cut off length	≤ 11	≤ 0.443
L ₁	Lead end protrusion	≤ 1	≤ 0.039
H	Height to seating plane (straight leads)	≥ 18	≥ 0.709
H ₀	Height to seating plane (crimp leads)	16.0 ± 0.5	0.630 ± 0.020
H ₁	Top of Component height	≤ 32	≤ 1.26
Δh	Body inclination	0.0 ± 1.0	0 ± 0.039
W	Carrier tape width	$18.0 + 1.0/- 0.5$	$0.709 + 0.039/- 0.02$
W ₀	Hold down tape width	15.0 ref. (Note 2)	0.591 ref. (Note 2)
W ₁	Sprocket hole position	$9 + 0.075/- 0.5$	$0.354 + 0.03/- 0.02$
F	1e lead space (Note 3)	$2.5 + 0.60/- 0.40$	$0.10 + 0.024/- 0.016$
	2e lead space (Note 3)	$5.0 + 0.60/- 0.40$	$0.20 + 0.024/- 0.016$
P ₀	Sprocket hole pitch	12.7 ± 0.3	0.50 ± 0.012
P ₁	1e sprocket hole centre to lead centre	5.08 ± 0.7	0.20 ± 0.028
	2e sprocket hole centre to lead centre	3.85 ± 0.7	0.015 ± 0.028
D ₀	Sprocket hole diameter	4.0 ± 0.30	0.157 ± 0.012
t	Overall tape thickness	≤ 0.9	≤ 0.035
d	Wire lead diameter	0.50 ± 0.05	0.02 ± 0.002
P	Taping pitch	12.7 ref.	0.50 ref.

Note:

2. Tape width of 6 mm (0.236 inch) permissible.

3. e = 2.54 mm.



MULTILAYER CERAMIC DIPPED AXIAL AND RADIAL CAPACITORS
for Automotive Applications



Product Range

Mono-Axial C0G Dielectric

C	Tol. (%)	Lb Max (mm)	ØD Max (mm)	Clear Text Code without Lead configuration and Packaging ⁽¹⁾
50 Vdc				
100 pF				A101J15C0GF□□□□V
150 pF				A151J15C0GF□□□□V
220 pF				A221J15C0GF□□□□V
330 pF				A331J15C0GF□□□□V
470 pF				A471J15C0GF□□□□V
680 pF				A681J15C0GF□□□□V
1000 pF				A102J15C0GF□□□□V
1500 pF				A152J15C0GF□□□□V
2200 pF				A222J15C0GF□□□□V
3300 pF				A332J15C0GF□□□□V
3900 pF				A392J15C0GF□□□□V
4700 pF				A472J20C0GF□□□□V
6800 pF				A682J20C0GF□□□□V
0.01 µF				A103J20C0GF□□□□V
100 Vdc				
100 pF				A101J15C0GH□□□□V
150 pF				A151J15C0GH□□□□V
220 pF				A221J15C0GH□□□□V
330 pF				A331J15C0GH□□□□V
470 pF				A471J15C0GH□□□□V
680 pF				A681J15C0GH□□□□V
1000 pF				A102J15C0GH□□□□V
1500 pF				A152J15C0GH□□□□V
1800 pF				A182J15C0GH□□□□V
2200 pF				A222J20C0GH□□□□V
3300 pF				A332J20C0GH□□□□V
4700 pF				A472J20C0GH□□□□V
6800 pF				A682J20C0GH□□□□V
0.01 µF				A103J20C0GH□□□□V
200 Vdc				
100 pF				A101J15C0GK□□□□V
150 pF				A151J15C0GK□□□□V
220 pF				A221J15C0GK□□□□V
330 pF				A331J15C0GK□□□□V
470 pF				A471J15C0GK□□□□V
680 pF				A681J15C0GK□□□□V
1000 pF				A102J15C0GK□□□□V

Note:

1.The four blank digits are filled with lead configuration and packaging, and please refer to ordering information



MULTILAYER CERAMIC DIPPED AXIAL AND RADIAL CAPACITORS
for Automotive Applications

**Capacitors - AEC-Q200 Approved****Product Range****Mono-Axial X7R Dielectric**

C	Tol. (%)	Lb Max (mm)	ØD Max (mm)	Clear Text Code without Lead configuration and Packaging ⁽¹⁾
50 Vdc				
470 pF				A471K15X7RF□□□□V
680 pF				A681K15X7RF□□□□V
1000 pF				A102K15X7RF□□□□V
1500 pF				A152K15X7RF□□□□V
2200 pF				A222K15X7RF□□□□V
3300 pF				A332K15X7RF□□□□V
4700 pF				A472K15X7RF□□□□V
6800 pF				A682K15X7RF□□□□V
0.010 µF				A103K15X7RF□□□□V
0.015 µF				A153K15X7RF□□□□V
0.022 µF				A223K15X7RF□□□□V
0.033 µF				A333K15X7RF□□□□V
0.047 µF				A473K15X7RF□□□□V
0.068 µF				A683K15X7RF□□□□V
0.10 µF				A104K15X7RF□□□□V
0.15 µF				A154K15X7RF□□□□V
0.22 µF				A224K20X7RF□□□□V
0.33 µF				A334K20X7RF□□□□V
0.47 µF				A474K20X7RF□□□□V
0.68 µF				A684K20X7RF□□□□V
1.0 µF				A105K20X7RF□□□□V
100 Vdc				
470 pF				A471K15X7RH□□□□V
680 pF				A681K15X7RH□□□□V
1000 pF				A102K15X7RH□□□□V
1500 pF				A152K15X7RH□□□□V
2200 pF				A222K15X7RH□□□□V
3300 pF				A332K15X7RH□□□□V
4700 pF				A472K15X7RH□□□□V
6800 pF				A682K15X7RH□□□□V
0.010 µF				A103K15X7RH□□□□V
0.015 µF				A153K15X7RH□□□□V
0.022 µF				A223K15X7RH□□□□V
0.033 µF				A333K15X7RH□□□□V
0.047 µF				A473K15X7RH□□□□V
0.068 µF				A683K15X7RH□□□□V
0.10 µF				A104K15X7RH□□□□V

Note:

- The four blank digits are filled with lead configuration and packaging, and please refer to ordering information
- Inserted with 1210 chip

>>



MULTILAYER CERAMIC DIPPED AXIAL AND RADIAL CAPACITORS
for Automotive Applications



Product Range

Mono-Axial X7R Dielectric (continued)

C	Tol. (%)	Lb Max (mm)	ØD Max (mm)	Clear Text Code without Lead configuration and Packaging ⁽¹⁾
100 Vdc (continued)				
0.15 µF	10	5.08	3.05	A154K20X7RH□□□□V
0.22 µF				A224K20X7RH□□□□V
0.33 µF		5.08	4.5 ⁽²⁾	A334K20X7RH□□□□V
0.47 µF				A474K20X7RH□□□□V
200 Vdc				
330 pF	10	3.81	3.81	A331K15X7RK□□□□V
470 pF				A471K15X7RK□□□□V
680 pF				A681K15X7RK□□□□V
1000 pF				A102K15X7RK□□□□V
1500 pF				A152K15X7RK□□□□V
2200 pF				A222K15X7RK□□□□V
3300 pF				A332K15X7RK□□□□V
4700 pF		5.08	3.05	A472K15X7RK□□□□V
6800 pF				A682K15X7RK□□□□V
0.010 µF				A103K15X7RK□□□□V
0.015 µF				A153K15X7RK□□□□V
0.022 µF				A223K15X7RK□□□□V
0.033 µF				A333K20X7RK□□□□V
0.047 µF				A473K20X7RK□□□□V
0.068 µF				A683K20X7RK□□□□V
0.10 µF				A683K20X7RK□□□□V

Note:

- 1.The four blank digits are filled with lead configuration and packaging, and please refer to ordering information
- 2.Inserted with 1210 chip

Capacitors - AEC-Q200 Approved



MULTILAYER CERAMIC DIPPED AXIAL AND RADIAL CAPACITORS

for Automotive Applications



Product Range

Mono-Axial X8R Dielectric

C	Tol. (%)	Lb Max (mm)	ØD Max (mm)	Clear Text Code without Lead configuration and Packaging ⁽¹⁾
50 Vdc				
470 pF				A471K15X8RF□□□□V
680 pF				A681K15X8RF□□□□V
1000 pF				A102K15X8RF□□□□V
1500 pF				A152K15X8RF□□□□V
2200 pF				A152K15X8RF□□□□V
3300 pF				A332K15X8RF□□□□V
4700 pF				A472K15X8RF□□□□V
6800 pF				A682K15X8RF□□□□V
0.010 µF				A103K15X8RF□□□□V
0.015 µF				A153K15X8RF□□□□V
0.022 µF				A223K15X8RF□□□□V
0.033 µF				A333K15X8RF□□□□V
0.047 µF				A473K15X8RF□□□□V
0.056 µF				A563K15X8RF□□□□V
0.068 µF				A683K20X8RF□□□□V
0.10 µF				A104K20X8RF□□□□V
0.15 µF				A154K20X8RF□□□□V
0.22 µF				A224K20X8RF□□□□V
0.33 µF				A334K20X8RF□□□□V

Note:

1. The four blank digits are filled with lead configuration and packaging, and please refer to ordering information
2. Inserted with 1210 chip

Capacitors - AEC-Q200 Approved



MULTILAYER CERAMIC DIPPED AXIAL AND RADIAL CAPACITORS
for Automotive Applications



Capacitors - AEC-Q200 Approved

Product Range

Mono-Kap C0G Dielectric

C	Tol. (%)	W _b Max (mm)	H Max (mm)	T Max (mm)	Clear Text Code without Lead configuration and Packaging ⁽¹⁾
50 Vdc					
100 pF	5	3.81	3.81	2.54	K101J15C0GF□□□□V
150 pF					K151J15C0GF□□□□V
220 pF					K221J15C0GF□□□□V
330 pF					K331J15C0GF□□□□V
470 pF					K471J15C0GF□□□□V
680 pF					K681J15C0GF□□□□V
1000 pF					K102J15C0GF□□□□V
1500 pF					K152J15C0GF□□□□V
2200 pF					K222J15C0GF□□□□V
3300 pF					K332J15C0GF□□□□V
3900 pF					K392J15C0GF□□□□V
4700 pF	5	5.08	5.08	3.18	K472J20C0GF□□□□V
6800 pF					K682J20C0GF□□□□V
0.01 µF					K103J20C0GF□□□□V
100 Vdc					
100 pF	5	3.81	3.81	2.54	K101J15C0GH□□□□V
150 pF					K151J15C0GH□□□□V
220 pF					K221J15C0GH□□□□V
330 pF					K331J15C0GH□□□□V
470 pF					K471J15C0GH□□□□V
680 pF					K681J15C0GH□□□□V
1000 pF					K102J15C0GH□□□□V
1500 pF					K152J15C0GH□□□□V
1800 pF					K182J15C0GH□□□□V
2200 pF		5.08	5.08	3.18	K222J20C0GH□□□□V
3300 pF					K332J20C0GH□□□□V
4700 pF					K472J20C0GH□□□□V
6800 pF					K682J20C0GH□□□□V
0.01 µF					K103J20C0GH□□□□V
200 Vdc					
100 pF	5	3.81	3.81	2.54	K101J15C0GK□□□□V
150 pF					K151J15C0GK□□□□V
220 pF					K221J15C0GK□□□□V
330 pF					K331J15C0GK□□□□V
470 pF					K471J15C0GK□□□□V
680 pF					K681J15C0GK□□□□V
1000 pF					K102J15C0GK□□□□V

Note: 1. The four blank digits are filled with lead configuration and packaging, and please refer to ordering information



MULTILAYER CERAMIC DIPPED AXIAL AND RADIAL CAPACITORS
for Automotive Applications



Product Range

Mono-Kap X7R Dielectric

C	Tol. (%)	W _b Max (mm)	H Max (mm)	T Max (mm)	Clear Text Code without Lead configuration and Packaging ⁽¹⁾
50 Vdc					
470 pF					K471K15X7RF□□□□V
680 pF					K681K15X7RF□□□□V
1000 pF					K102K15X7RF□□□□V
1500 pF					K152K15X7RF□□□□V
2200 pF					K222K15X7RF□□□□V
3300 pF					K332K15X7RF□□□□V
4700 pF					K472K15X7RF□□□□V
6800 pF					K682K15X7RF□□□□V
0.010 µF					K103K15X7RF□□□□V
0.015 µF					K153K15X7RF□□□□V
0.022 µF					K223K15X7RF□□□□V
0.033 µF					K333K15X7RF□□□□V
0.047 µF					K473K15X7RF□□□□V
0.068 µF					K683K15X7RF□□□□V
0.10 µF					K104K15X7RF□□□□V
0.15 µF					K154K15X7RF□□□□V
0.22 µF					K224K20X7RF□□□□V
0.33 µF					K334K20X7RF□□□□V
0.47 µF					K474K20X7RF□□□□V
0.68 µF					K684K20X7RF□□□□V
1.0 µF					K105K20X7RF□□□□V
100 Vdc					
470 pF					K471K15X7RH□□□□V
680 pF					K681K15X7RH□□□□V
1000 pF					K102K15X7RH□□□□V
1500 pF					K152K15X7RH□□□□V
2200 pF					K222K15X7RH□□□□V
3300 pF					K332K15X7RH□□□□V
4700 pF					K472K15X7RH□□□□V
6800 pF					K682K15X7RH□□□□V
0.010 µF					K103K15X7RH□□□□V
0.015 µF					K153K15X7RH□□□□V
0.022 µF					K223K15X7RH□□□□V
0.033 µF					K333K15X7RH□□□□V
0.047 µF					K473K15X7RH□□□□V
0.068 µF					K683K15X7RH□□□□V
0.10 µF					K104K15X7RH□□□□V

Capacitors - AEC-Q200 Approved

Note:

1. The four blank digits are filled with lead configuration and packaging, and please refer to ordering information

>>



MULTILAYER CERAMIC DIPPED AXIAL AND RADIAL CAPACITORS

for Automotive Applications



Product Range

Mono-Kap X7R Dielectric (continued)

C	Tol. (%)	W _b Max (mm)	H Max (mm)	T Max (mm)	Clear Text Code without Lead configuration and Packaging ⁽¹⁾
100 Vdc (continued)					
0.15 µF	10	5.08	5.08	3.18	K154K20X7RH□□□□V
0.22 µF					K224K20X7RH□□□□V
0.33 µF					K334K20X7RH□□□□V
0.47 µF					K474K20X7RH□□□□V
200 Vdc					
330 pF	10	3.81	3.81	2.54	K331K15X7RK□□□□V
470 pF					K471K15X7RK□□□□V
680 pF					K681K15X7RK□□□□V
1000 pF					K102K15X7RK□□□□V
1500 pF					K152K15X7RK□□□□V
2200 pF					K222K15X7RK□□□□V
3300 pF					K332K15X7RK□□□□V
4700 pF					K472K15X7RK□□□□V
6800 pF					K682K15X7RK□□□□V
0.010 µF					K103K15X7RK□□□□V
0.015 µF					K153K15X7RK□□□□V
0.022 µF					K223K15X7RK□□□□V
0.033 µF		5.08	5.08	3.18	K333K20X7RK□□□□V
0.047 µF					K473K20X7RK□□□□V
0.068 µF					K683K20X7RK□□□□V
0.10 µF					K104K20X7RK□□□□V

Note:

1. The four blank digits are filled with lead configuration and packaging, and please refer to ordering information

Capacitors - AEC-Q200 Approved

**MULTILAYER CERAMIC DIPPED AXIAL AND RADIAL CAPACITORS**
for Automotive Applications**Product Range****Mono-Axial X8R Dielectric**

C	Tol. (%)	W _b Max (mm)	H Max (mm)	T Max (mm)	Clear Text Code without Lead configuration and Packaging ⁽¹⁾
50 Vdc					
470 pF					K471K15X8RF□□□□V
680 pF					K681K15X8RF□□□□V
1000 pF					K102K15X8RF□□□□V
1500 pF					K152K15X8RF□□□□V
2200 pF					K222K15X8RF□□□□V
3300 pF					K332K15X8RF□□□□V
4700 pF					K472K15X8RF□□□□V
6800 pF					K682K15X8RF□□□□V
0.010 µF					K103K15X8RF□□□□V
0.015 µF					K153K15X8RF□□□□V
0.022 µF					K223K15X8RF□□□□V
0.033 µF					K333K15X8RF□□□□V
0.047 µF					K473K15X8RF□□□□V
0.056 µF					K563K15X8RF□□□□V
0.068 µF					K683K20X8RF□□□□V
0.10 µF					K104K20X8RF□□□□V
0.15 µF					K154K20X8RF□□□□V
0.22 µF					K224K20X8RF□□□□V
0.33 µF					K334K20X8RF□□□□V

Note:

1. The four blank digits are filled with lead configuration and packaging, and please refer to ordering information

Capacitors - AEC-Q200 Approved



MULTILAYER CERAMIC DIPPED AXIAL AND RADIAL CAPACITORS for Automotive Applications



Capacitors - AEC-Q200 Approved

WORLDWIDE SALES CONTACTS

THE AMERICAS

UNITED STATES

VISHAY AMERICAS
ONE GREENWICH PLACE
SHELTON, CT 06484
UNITED STATES
PH: +1-402-563-6866
FAX: +1-402-563-6296

ASIA

SINGAPORE

VISHAY INTERTECHNOLOGY ASIA PTE LTD.
37A TAMPINES STREET 92 #07-00
SINGAPORE 528886
PH: +65-6788-6668
FAX: +65-6788-0988

P.R. CHINA

VISHAY CHINA CO., LTD.
15D, SUN TONG INFOPORT PLAZA
55 HUAI HAI WEST ROAD
SHANGHAI 200030
P.R. CHINA
PH: +86-21-5258 5000
FAX: +86-21-5258 7979

JAPAN

VISHAY JAPAN CO., LTD.
SHIBUYA PRESTIGE BLDG. 4F
3-12-22, SHIBUYA
SHIBUYA-KU
TOKYO 150-0002
JAPAN
PH: +81-3-5466-7150
FAX: +81-3-5466-7160

EUROPE

GERMANY

VISHAY ELECTRONIC GMBH
DR.-FELIX-ZANDMAN-PLATZ 1
95100 SELB
GERMANY
PH: +49-9287-71-0
FAX: +49-9287-70435

FRANCE

VISHAY S.A.
199, BD DE LA MADELEINE
06003 NICE, CEDEX 1
FRANCE
PH: +33-4-9337-2727
FAX: +33-4-9337-2726

UNITED KINGDOM

VISHAY LTD.
SUITE 6C, TOWER HOUSE
ST. CATHERINE'S COURT
SUNDERLAND ENTERPRISE PARK
SUNDERLAND SR5 3XJ
UNITED KINGDOM
PH: +44-191-516-8584
FAX: +44-191-549-9556



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литер Н,
помещение 100-Н Офис 331