


## 60 V, 2 A low drop power Schottky rectifier

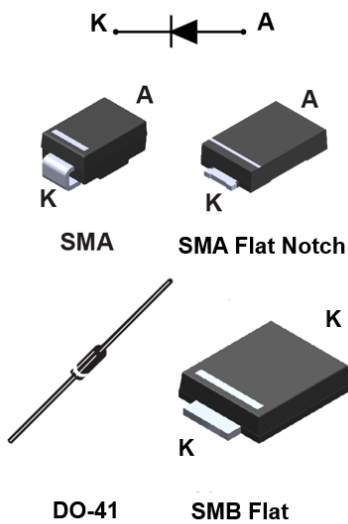

### Features

- Negligible switching losses
- Low forward voltage drop for higher efficiency and extended battery life
- Surface mount miniature package
- Avalanche rated
- ECOPACK2 compliant component

### Applications

- Lighting
- Desktop power supply
- Battery charger
- Set top box
- Auxiliary power

### Description

This 60 V power Schottky rectifier is ideal for switch mode power supplies and high frequency converters.

Packaged in SMA, SMA Flat Notch, axial and SMB Flat, the [STPS2L60](#) is optimized for use in low voltage, high frequency inverters and small battery chargers.

| Product status  |        |
|-----------------|--------|
| STPS2L60        |        |
| Product summary |        |
| Symbol          | Values |
| $I_{F(AV)}$     | 2 A    |
| $V_{RRM}$       | 60 V   |
| $T_j(max.)$     | 150 °C |
| $V_F(typ.)$     | 0.51 V |

# 1 Characteristics

**Table 1. Absolute ratings (limiting values, at 25 °C, unless otherwise specified)**

| Symbol              | Parameter                                             |                                                 |                                   | Value        | Unit |
|---------------------|-------------------------------------------------------|-------------------------------------------------|-----------------------------------|--------------|------|
| V <sub>RRM</sub>    | Repetitive peak reverse voltage                       |                                                 |                                   | 60           | V    |
| I <sub>F(RMS)</sub> | Forward rms current                                   |                                                 |                                   | 10           | A    |
| I <sub>F(AV)</sub>  | Average forward current δ = 0.5, square wave          | SMB Flat                                        | T <sub>L</sub> = 130 °C           | 2            | A    |
|                     |                                                       | SMA                                             | T <sub>L</sub> = 115 °C           |              |      |
|                     |                                                       | SMA Flat Notch                                  | T <sub>L</sub> = 120 °C           |              |      |
|                     |                                                       | DO-41                                           | T <sub>L</sub> = 110 °C           |              |      |
| I <sub>FSM</sub>    | Surge non repetitive forward current                  | SMB Flat, SMA, DO-41                            | t <sub>p</sub> = 10 ms sinusoidal | 75           | A    |
|                     |                                                       | SMA Flat Notch                                  |                                   | 105          |      |
| P <sub>ARM</sub>    | Repetitive peak avalanche power                       | t <sub>p</sub> = 10 μs, T <sub>j</sub> = 125 °C |                                   | 115          | W    |
| T <sub>stg</sub>    | Storage temperature range                             |                                                 |                                   | -65 to + 150 | °C   |
| T <sub>j</sub>      | Maximum operating junction temperature <sup>(1)</sup> |                                                 |                                   | + 150        | °C   |

1.  $(dP_{tot}/dT_J) < (1/R_{th(j-a)})$  condition to avoid thermal runaway for a diode on its own heatsink.

**Table 2. Thermal resistance parameter**

| Symbol        | Parameter        |                     |                | Max. value | Unit |
|---------------|------------------|---------------------|----------------|------------|------|
| $R_{th(j-l)}$ | Junction to lead |                     | SMB Flat       | 15         | °C/W |
|               |                  |                     | SMA            | 25         |      |
|               |                  |                     | SMA Flat Notch | 20         |      |
|               | Junction to lead | Lead length = 10 mm | DO-41          | 30         |      |

For more information, please refer to the following application note :

- AN5088 : Rectifiers thermal management, handling and mounting recommendations

**Table 3. Static electrical characteristics**

| Symbol      | Parameter               | Test conditions       |                    | Min. | Typ. | Max. | Unit          |
|-------------|-------------------------|-----------------------|--------------------|------|------|------|---------------|
| $I_R^{(1)}$ | Reverse leakage current | $T_J = 25\text{ °C}$  | $V_R = V_{RRM}$    | -    |      | 100  | $\mu\text{A}$ |
|             |                         | $T_J = 100\text{ °C}$ |                    | -    | 2    | 10   | mA            |
| $V_F^{(1)}$ | Forward voltage drop    | $T_J = 25\text{ °C}$  | $I_F = 2\text{ A}$ | -    |      | 0.60 | V             |
|             |                         | $T_J = 125\text{ °C}$ |                    | -    | 0.51 | 0.55 |               |
|             |                         | $T_J = 25\text{ °C}$  | $I_F = 4\text{ A}$ | -    |      | 0.77 |               |
|             |                         | $T_J = 125\text{ °C}$ |                    | -    | 0.62 | 0.67 |               |

1. Pulse test:  $t_p = 380\text{ }\mu\text{s}$ ,  $\delta < 2\%$


To evaluate the conduction losses use the following equation:  $P = 0.43 \times I_{F(AV)} + 0.06 I_{F(RMS)}^2$

For more information, please refer to the following application notes related to the power losses :


- AN604: Calculation of conduction losses in a power rectifier
- AN4021: Calculation of reverse losses on a power diode

## 1.1 Characteristics (curves)


**Figure 1. Average forward power dissipation versus average forward current**

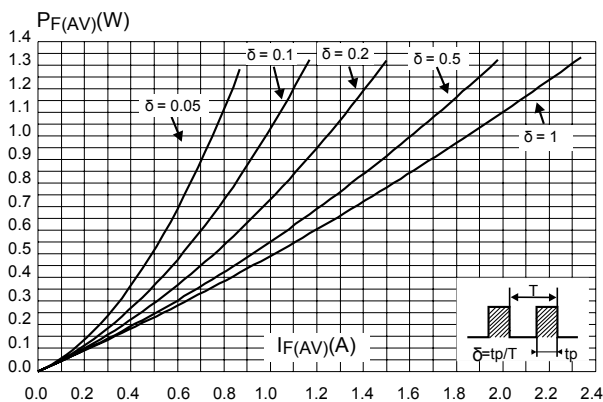


**Figure 2. Average forward current versus ambient temperature ( $\delta = 0.5$ , DO-41, SMA)**

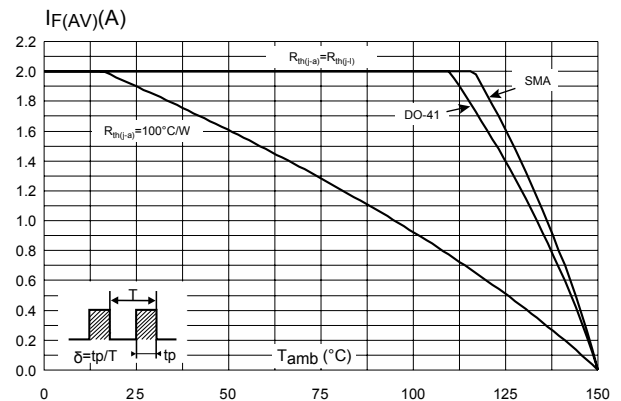


**Figure 3. Average forward current versus ambient temperature ( $\delta = 0.5$ , SMB Flat)**

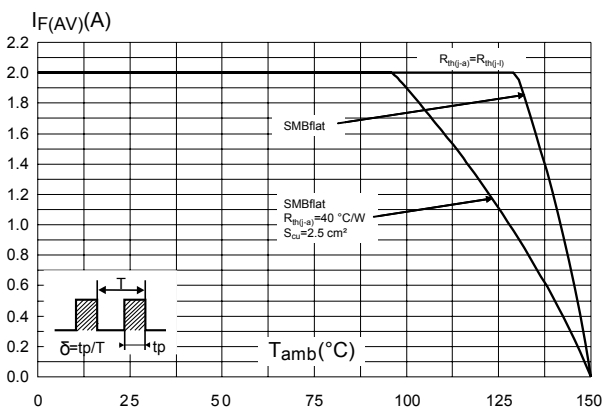


**Figure 4. Normalized avalanche power derating versus pulse duration ( $T_j = 125^\circ\text{C}$ )**

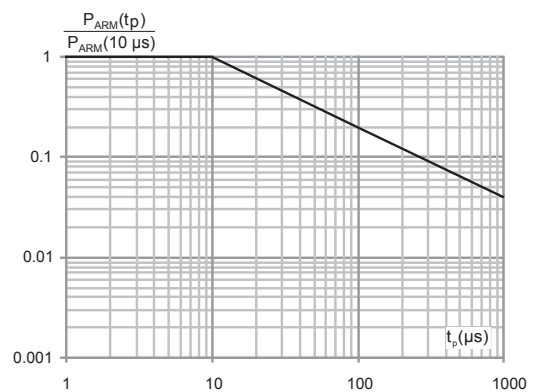


**Figure 5. Relative variation of thermal impedance junction to ambient versus pulse duration (SMA)**

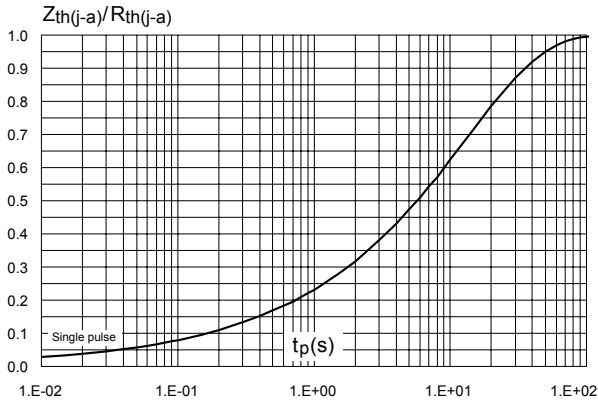


**Figure 6. Relative variation of thermal impedance junction to ambient versus pulse duration (DO-41)**

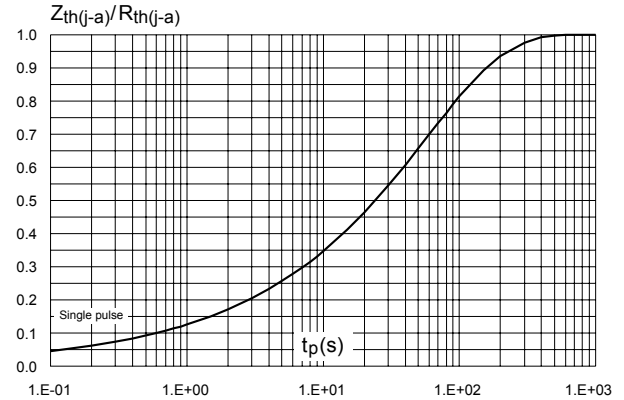


**Figure 7. Relative variation of thermal impedance junction to lead versus pulse duration (SMB Flat)**

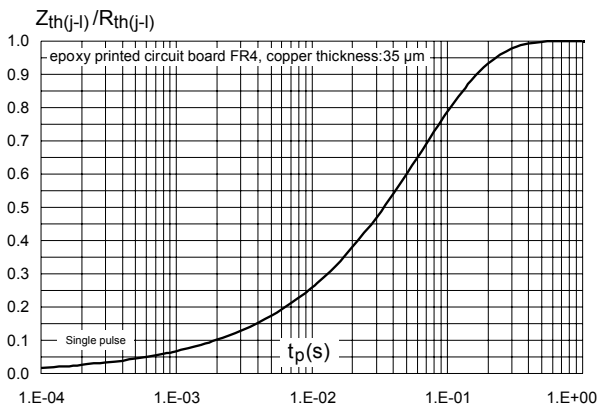


**Figure 8. Junction capacitance versus reverse voltage applied (typical values)**

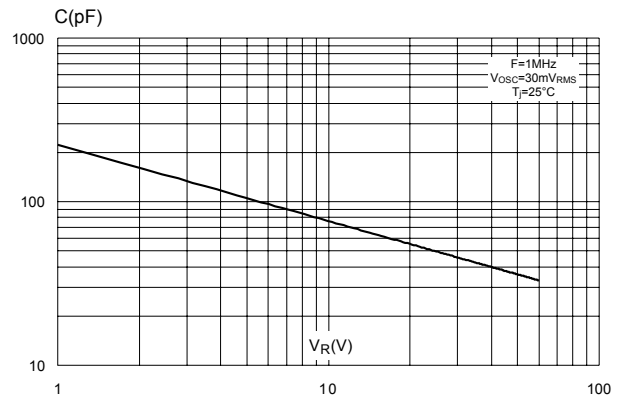


**Figure 9. Reverse leakage current versus reverse voltage applied (typical values)**

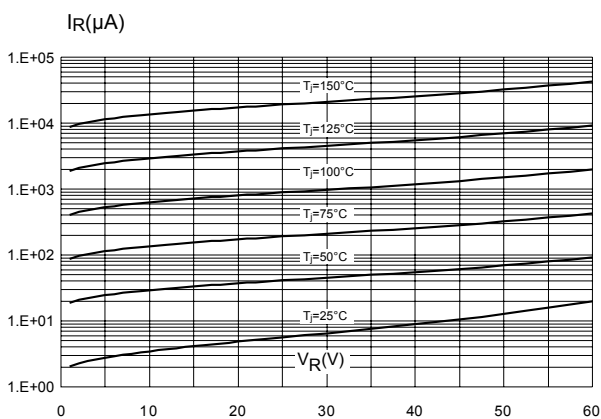


**Figure 10. Forward voltage drop versus forward current**

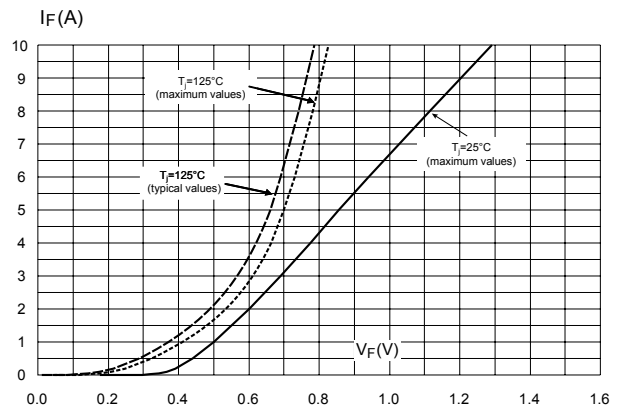


**Figure 11. Thermal resistance junction to ambient versus copper surface under each lead (SMA)**

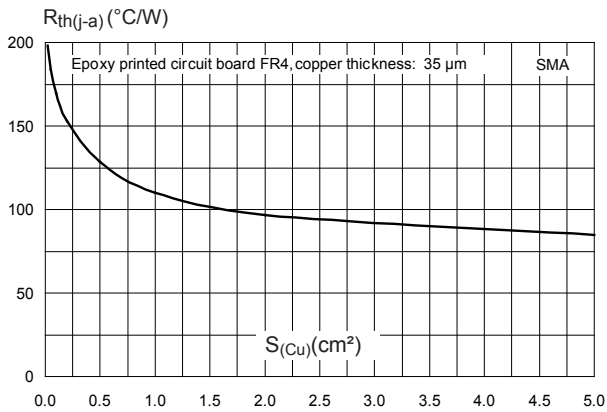


**Figure 12. Thermal resistance versus lead length (DO-41)**

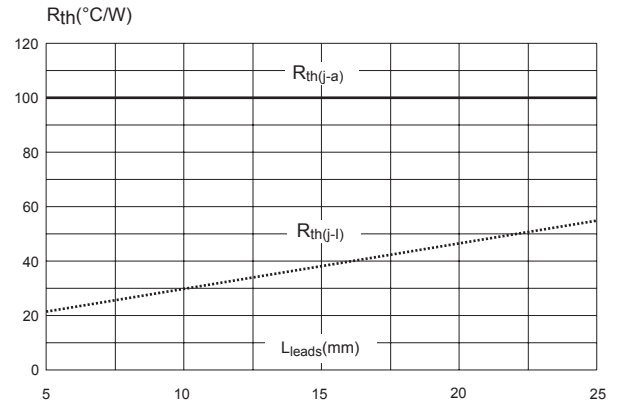

**Figure 13. Thermal resistance junction to ambient versus copper surface under each lead (SMB Flat)**

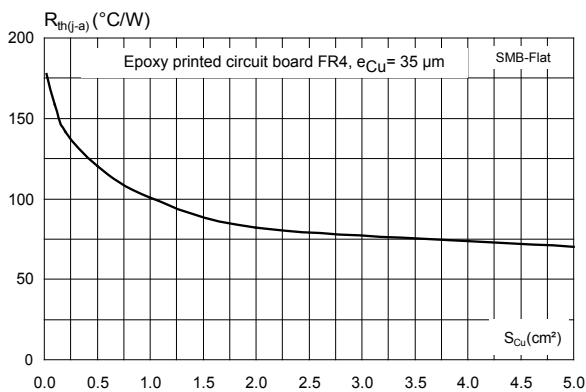

**Figure 14. Thermal resistance junction to ambient versus copper surface under each lead (SMA Flat Notch)**

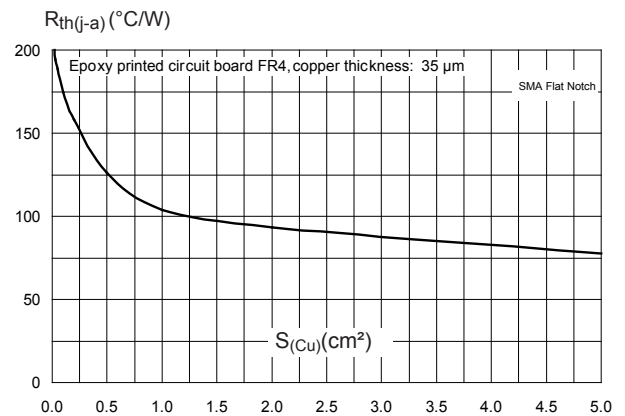


## 2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK is an ST trademark.

### 2.1 SMA package information

- Epoxy meets UL94, V0
- Cooling method : by conduction (C)


**Figure 15. SMA package outline**

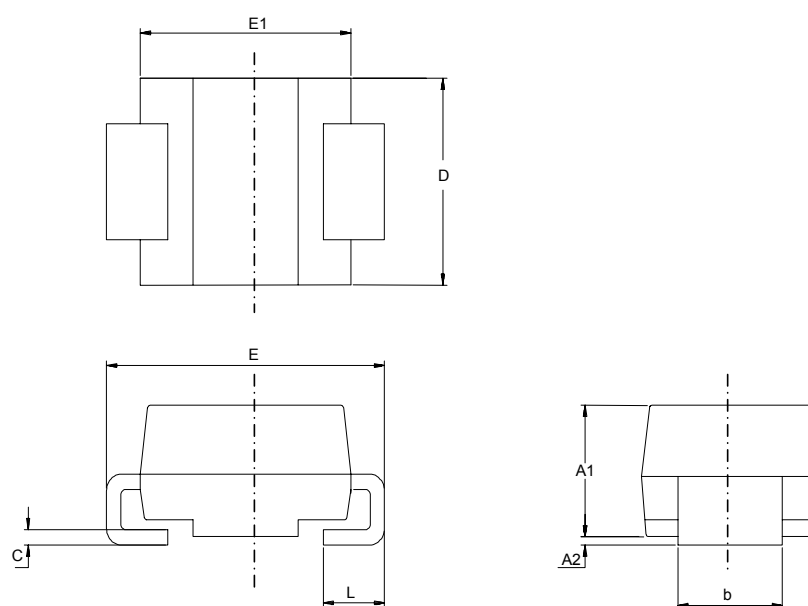

**Table 4. SMA package mechanical data**

| Ref. | Dimensions  |      |                             |       |
|------|-------------|------|-----------------------------|-------|
|      | Millimeters |      | Inches (for reference only) |       |
|      | Min.        | Max. | Min.                        | Max.  |
| A1   | 1.90        | 2.45 | 0.074                       | 0.097 |
| A2   | 0.05        | 0.20 | 0.001                       | 0.008 |
| b    | 1.25        | 1.65 | 0.049                       | 0.065 |
| c    | 0.15        | 0.40 | 0.005                       | 0.016 |
| D    | 2.25        | 2.90 | 0.088                       | 0.115 |
| E    | 4.80        | 5.35 | 0.188                       | 0.211 |
| E1   | 3.95        | 4.60 | 0.155                       | 0.182 |
| L    | 0.75        | 1.50 | 0.029                       | 0.060 |


**Figure 16. SMA recommended footprint in mm (inches)**

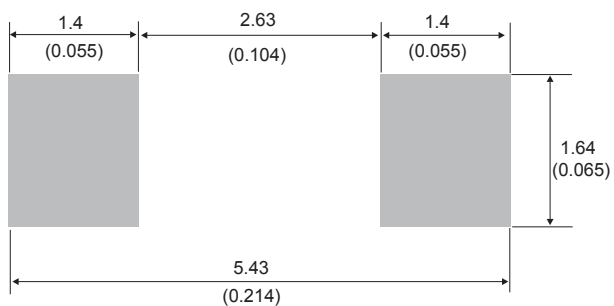

## 2.2 SMA Flat Notch package information

- Epoxy meets UL94, V0
- Cooling method: by conduction (C)
- Band indicates cathode


**Figure 17. SMA Flat Notch package outline**

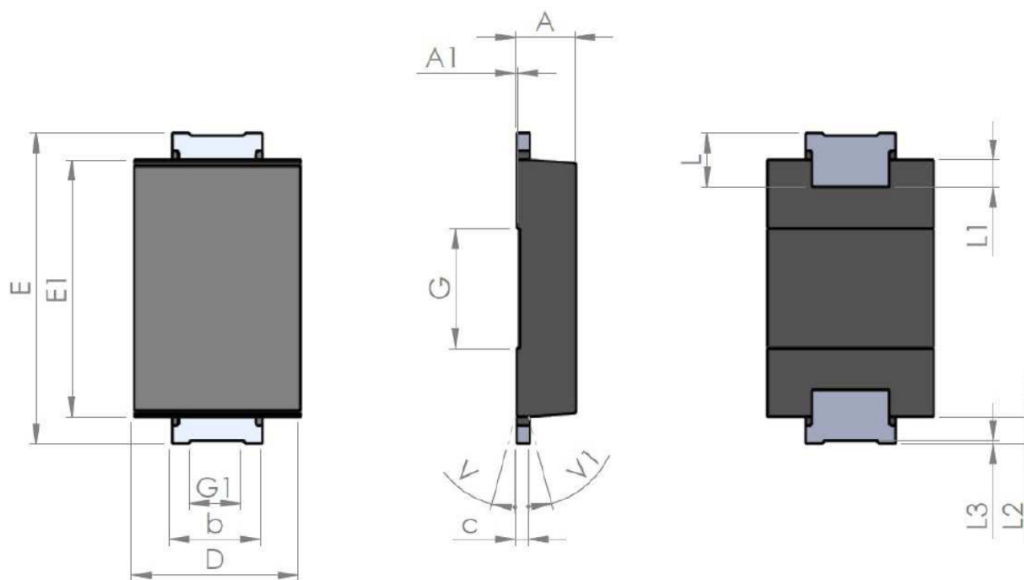

**Table 5. SMA Flat Notch package mechanical data**

| Ref. | Dimensions  |      |      |                             |       |       |
|------|-------------|------|------|-----------------------------|-------|-------|
|      | Millimeters |      |      | Inches (for reference only) |       |       |
|      | Min.        | Typ. | Max. | Min.                        | Typ.  | Max.  |
| A1   | 0.90        |      | 1.10 | 0.035                       |       | 0.044 |
| A1   |             | 0.05 |      |                             | 0.002 |       |
| b    | 1.25        |      | 1.65 | 0.049                       |       | 0.065 |
| C    | 0.15        |      | 0.40 | 0.005                       |       | 0.016 |
| D    | 2.25        |      | 2.90 | 0.088                       |       | 0.115 |
| E    | 5.00        |      | 5.35 | 0.196                       |       | 0.211 |
| E1   | 3.95        |      | 4.60 | 0.155                       |       | 0.182 |
| G    |             | 2.00 |      |                             | 0.079 |       |
| G1   |             | 0.85 |      |                             | 0.033 |       |
| L    | 0.75        |      | 1.20 | 0.029                       |       |       |
| L1   |             | 0.45 |      |                             | 0.018 |       |
| L2   |             | 0.45 |      |                             | 0.018 |       |
| L3   |             | 0.05 |      |                             | 0.002 |       |
| V    |             |      | 8°   |                             |       | 8°    |
| V1   |             |      | 8°   |                             |       | 8°    |


**Figure 18. SMA Flat Notch recommended footprint in mm (inches)**

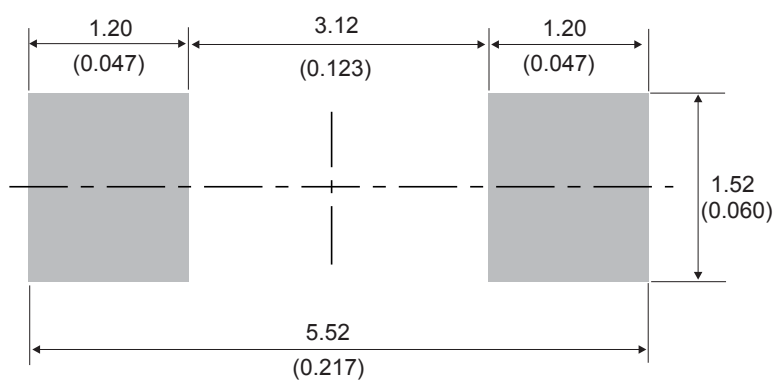

## 2.3 SMB Flat package information

- Epoxy meets UL94, V0
- Lead-free package


**Figure 19. SMB Flat package outline**

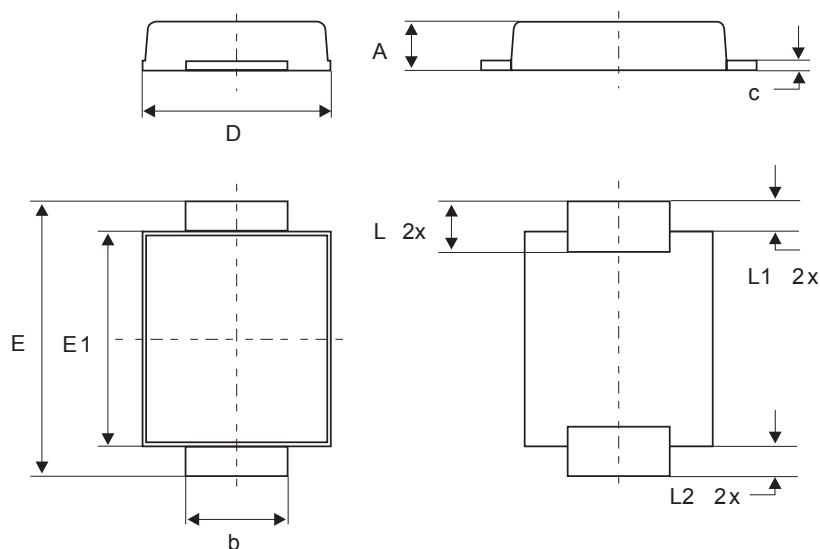

**Table 6. SMB Flat mechanical data**

| Ref. | Dimensions  |      |      |                             |       |       |
|------|-------------|------|------|-----------------------------|-------|-------|
|      | Millimeters |      |      | Inches (for reference only) |       |       |
|      | Min.        | Typ. | Max. | Min.                        | Typ.  | Max.  |
| A    | 0.90        |      | 1.10 | 0.035                       |       | 0.043 |
| b    | 1.95        |      | 2.20 | 0.077                       |       | 0.087 |
| c    | 0.15        |      | 0.40 | 0.006                       |       | 0.016 |
| D    | 3.30        |      | 3.95 | 0.130                       |       | 0.156 |
| E    | 5.10        |      | 5.60 | 0.201                       |       | 0.220 |
| E1   | 4.05        |      | 4.60 | 0.159                       |       | 0.181 |
| L    | 0.75        |      | 1.50 | 0.030                       |       | 0.059 |
| L1   |             | 0.40 |      |                             | 0.016 |       |
| L2   |             | 0.60 |      |                             | 0.024 |       |

**Figure 20. Footprint recommendations, dimensions in mm (inches)**

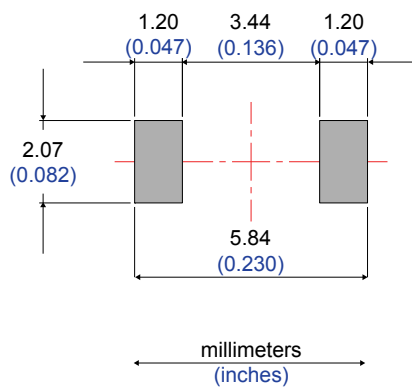

## 2.4 DO-41 Package information

- Epoxy meets UL 94, V0

Figure 21. DO-41 package outline

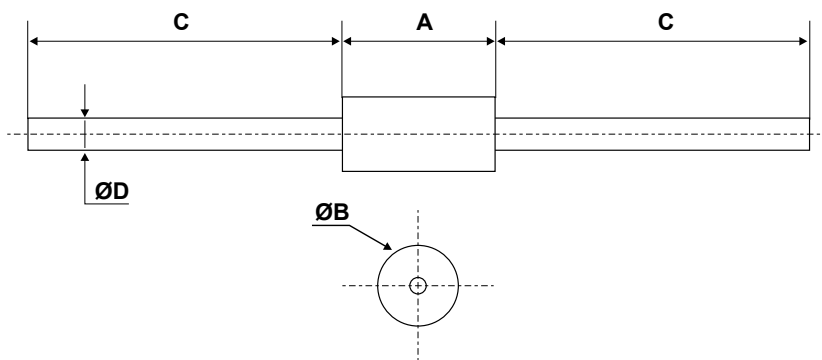


Table 7. DO-41 package mechanical data

| Ref. | Dimensions  |      |      |                             |      |        |
|------|-------------|------|------|-----------------------------|------|--------|
|      | Millimeters |      |      | Inches (for reference only) |      |        |
|      | Min.        | Typ. | Max. | Min.                        | Typ. | Max.   |
| A    | 4.1         | -    | 5.20 | 0.160                       | -    | 0.205  |
| B    | 2.00        | -    | 2.71 | 0.080                       | -    | 0.107  |
| C    | 25.40       | -    |      | 1.000                       | -    |        |
| D    | 0.71        | -    | 0.86 | 0.028                       | -    | 0.0034 |

### 3 Ordering information

**Table 8. Ordering information**

| Order code  | Marking  | Package        | Weight  | Base qty. | Delivery mode |
|-------------|----------|----------------|---------|-----------|---------------|
| STPS2L60A   | S26      | SMA            | 0.068 g | 5000      | Tape and reel |
| STPS2L60AFN | A26      | SMA Flat Notch | 0.039 g | 10 000    | Tape and reel |
| STPS2L60    | STPS2L60 | DO-41          | 0.34 g  | 2000      | Ammopack      |
| STPS2L60UF  | FG26     | SMB Flat       | 0.050 g | 5000      | Tape and reel |

## Revision history

**Table 9. Document revision history**

| Date        | Version | Changes                                                                                                                                                                                                                      |
|-------------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Jul-2003    | 2A      | Last update.                                                                                                                                                                                                                 |
| Aug-2004    | 3       | SMA package dimensions update. Reference A1 max changed from 2.70 mm (0.106 inch) to 2.03 mm (0.080 inch).SMA package dimensions update. Reference A1 max changed from 2.70 mm (0.106 inch) to 2.03 mm (0.080 inch).         |
| 18-Sep-2008 | 4       | Reformatted to current standards. Added SMB flat package.                                                                                                                                                                    |
| 30-Sep-2009 | 5       | Updated table 7 package dimensions.                                                                                                                                                                                          |
| 23-Sep-2011 | 6       | Updated SMA package information.                                                                                                                                                                                             |
| 30-Nov-2018 | 7       | Updated <a href="#">Table 1. Absolute ratings</a> (limiting values, at 25 °C, unless otherwise specified) and <a href="#">Figure 4. Normalized avalanche power derating versus pulse duration</a> ( $T_j = 125\text{ °C}$ ). |
| 27-Sep-2019 | 8       | Added <a href="#">Section 2.2 SMA Flat Notch package information</a> .                                                                                                                                                       |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2019 STMicroelectronics – All rights reserved



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331